

# TOSHIBA

PRODUCT GUIDE

# Small and Medium Diodes




# 2004 semiconductor

<http://www.semicon.toshiba.co.jp/eng>



# 1. Diode Product Tree

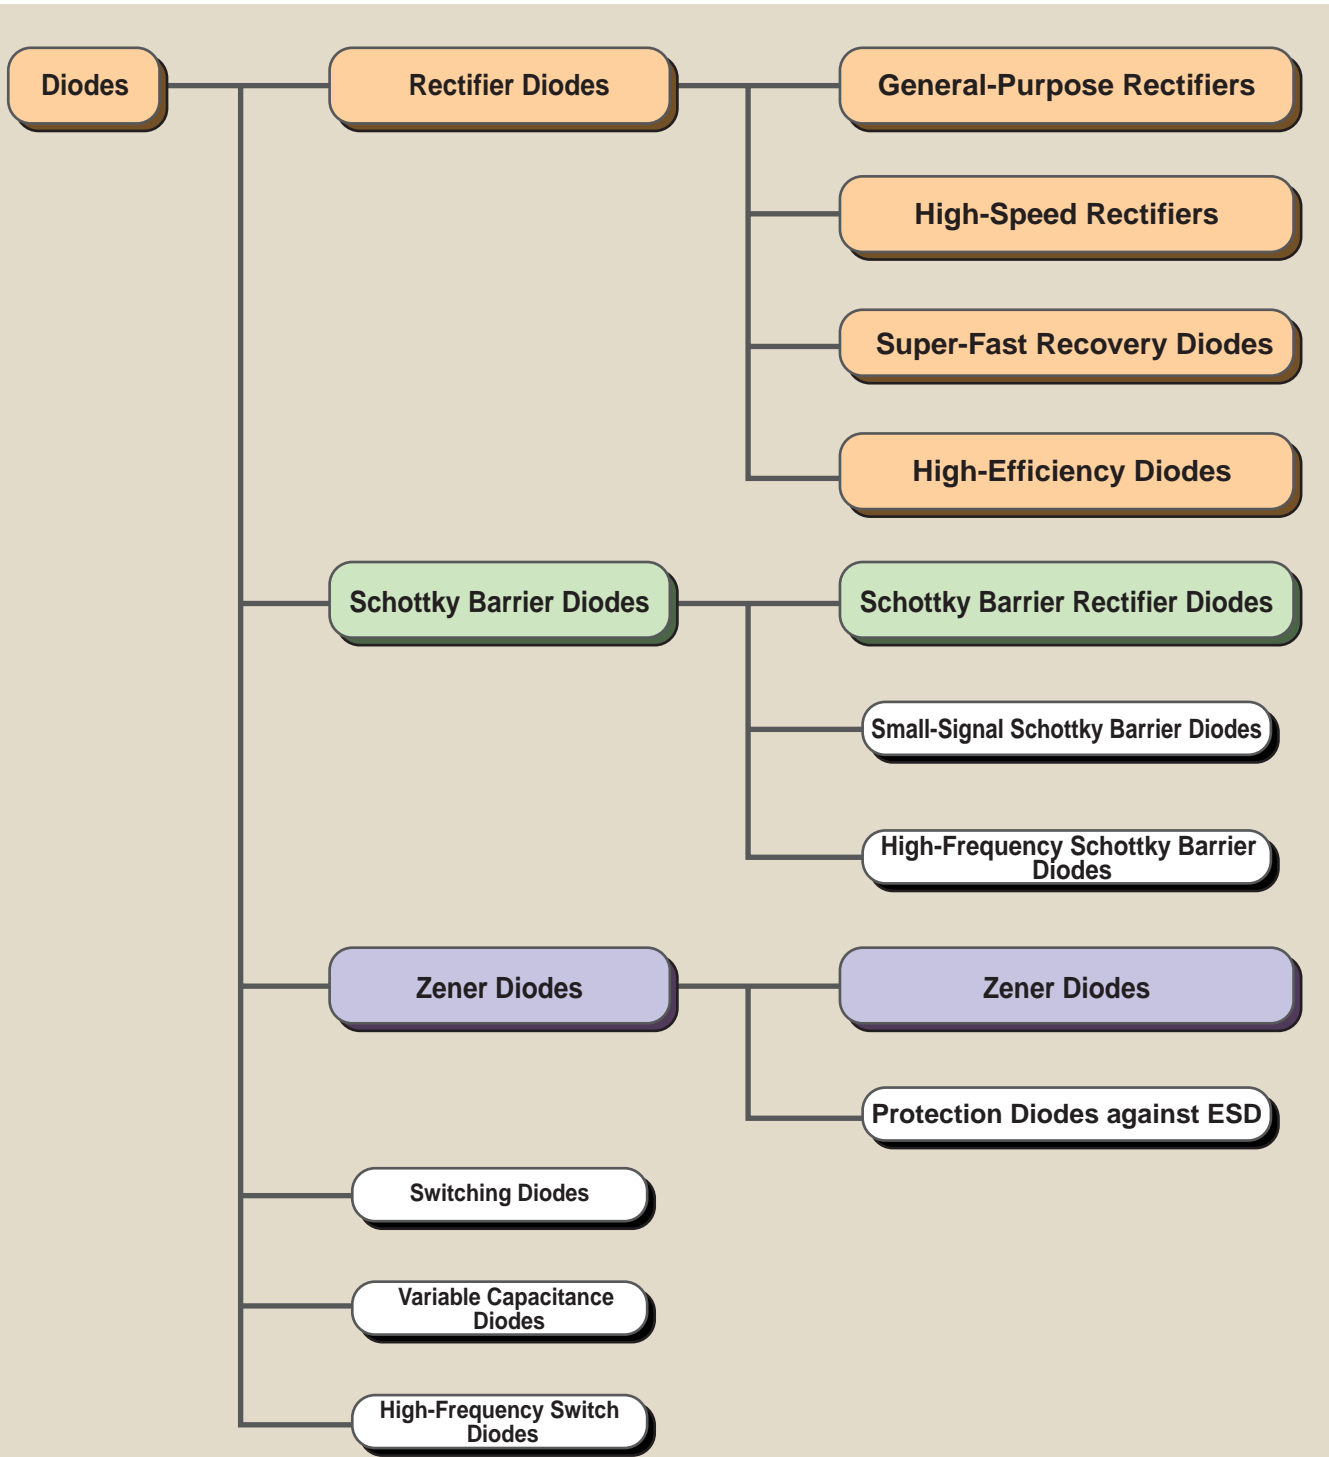

This brochure only contains information on the small and medium rectifier diodes.  
For the other information on TOSHIBA diodes, please refer to the brochures or visit our website below.  
**Website:** <http://www.semicon.toshiba.co.jp/eng>  
**Brochures:** RF Semiconductors  
General-Purpose Small-Signal Surface-Mount Devices

# 2. Selection Guide by Product Categories

## General-Purpose Rectifiers and High-Speed Rectifiers

### General-Purpose Rectifiers

	Package	Peak Repetitive Reverse Voltage					Package Number	Page Listing	
		100V	400V	600V	800V	1000V			
Average Forward Current	<b>0.7 A</b>	S-FLAT	CRG01	CRG02				⑭	10
	<b>1 A</b>	DO-15	1S1885	1S1887	1S1888		1S1830	④	12
		DO-41	S5277B	S5277G	S5277J		S5277N	③	11
		DO-41S	S5566B	S5566G	S5566J		S5566N	②	
		DO-41SS	S5688B	S5688G	S5688J		S5688N	①	
		S-FLAT <b>NEW</b>		CRG03				⑭	10
		I-FLAT	U1BC44	U1GC44 U1GC44S*	U1JC44			⑯	10
		M-FLAT <b>NEW</b>		CMC01*				⑮	12
	<b>1.2 A</b>	DO-15	1S1885A	1S1887A	1S1888A			④	
	<b>1.5 A</b>	DO-15L	1R5BZ41	1R5GZ41	1R5JZ41		1R5NZ41	⑤	10
	<b>2 A</b>	M-FLAT <b>NEW</b>		CMG02				⑮	12
<b>10 A</b>	TO220-SM				U10LC48		⑳	12	

\*: For strobe discharge circuit

### Fast Recovery Diodes (FRDs)

	Package	Reverse Recovery Time	Peak Repetitive Reverse Voltage						Package Number	Page Listing			
			100V	400V	500V	600V	1000V	1500V			1800V		
Average Forward Current	<b>0.2 A</b>	DO-41S	4 μs					TFR3N	TFR3T		②	13	
		DO-41SS	10 μs			TFR7H*					①		
	<b>0.3 A</b>	DO-41SS	4 μs					TFR4N	TFR4T				
	<b>0.5 A</b>	DO-15	1.5 μs	S5295B	S5295G		S5295J				④	14	
		DO-41SS		TVR5B	TVR5G		TVR5J				①		
		I-FLAT	1.5 μs		U05GH44		U05JH44				⑯	13	
			4 μs					U05NH44	U05TH44				
		DO-41	2 μs	TVR1B	TVR1G		TVR1J					③	14
			4 μs					TFR2N	TFR2T				
			10 μs					TFR1N	TFR1T				
	20 μs		TVR2B	TVR2G		TVR2J							
	<b>0.7 A</b>	DO-15	6 μs						1S1832		④		
	<b>1 A</b>	DO-41SS	0.4 μs					1NH42			①	13	
		DO-41S	0.4 μs					1NH41			②		
		DO-15	1.5 μs		1S1834		1S1835				④		
<b>1.2 A</b>	DO-15L	20 μs				TVR4J	TVR4N			⑤	14		
<b>1.5 A</b>	DO-15L	0.4 μs					1R5NH41						

\*:  $V_{RM} = 500 V$ ,  $V_{RRSM} = 1500 V$

## Very-Fast and Super-Fast Recovery Diodes (V-FRDs) (S-FRDs); High-Efficiency Diodes (HEDs)

### Very-Fast Recovery Diodes (V-FRDs)

	Package	Reverse Recovery Time	Peak Repetitive Reverse Voltage			Package Number	Page Listing	
			400 V	600 V	1000 V			
Average Forward Current	0.5 A	DO-41SS	200 ns		05NH46	①	15	
		DO-41S	200 ns		05NH45	②		
	1.0 A	DO-41SS	200 ns	1GH46	1JH46	①		
		DO-41S	200 ns	1GH45	1JH45	②		
	1.5 A	DO-15L	200 ns	1R5GH45	1R5JH45	1R5NH45		⑤

### Super-Fast Recovery Diodes (S-FRDs)

	Package	Reverse Recovery Time	Peak Repetitive Reverse Voltage				Package Number	Page Listing
			400 V	600 V	800 V	1000 V		
Average Forward Current	0.5 A	S-FLAT <b>NEW</b>	100 ns		CRF02*		⑭	16
		I-FLAT	100 ns			U05NU44	⑯	
		DO-41SS	100 ns			05NU42	①	
		DO-41S	100 ns			05NU41	②	
	0.7 A	S-FLAT <b>NEW</b>	100 ns		CRF03		⑭	17
	0.8 A	DO-41	100 ns	0R8GU41			③	
	1 A	I-FLAT	100 ns	U1GU44	U1JU44		⑯	16
		DO-41SS	100 ns	1GU42	1JU42	1NU41	①	
		DO-41S	100 ns		1JU41	1R5NU41	②	
		DO-15	100 ns				④	
1.5 A	DO-15L	100 ns	1R5GU41	1R5JU41		⑤	17	
5.0 A	TO-220NIS #	100 ns	5GUZ47	5JUZ47		⑥		

#: Center lead less

\*: For strobe discharge circuit

### High-Efficiency Diodes (HEDs)

	Package	Reverse Recovery Time	Peak Repetitive Reverse Voltage				Package Number	Page Listing	
			200 V	300 V	400 V	600 V			
Average Forward Current	Single type	1 A	S-FLAT	CRH01			⑭	18	
			M-FLAT <b>NEW</b>	CMH04		CMH05* CMH05A	⑮	19	
			I-FLAT	U1DL44A			⑯	18	
			PW-MINI	U1DL49			⑱		
			DO-41S	1DL41A			②	19	
		DO-41SS	1DL42A			①			
		DO-15L	1R5DL41A			⑤			
		2 A	M-FLAT <b>NEW</b>	35 ns	CMH07		CMH08* CMH08A	⑮	20
3 A	M-FLAT <b>NEW</b>	35 ns	CMH01		CMH02* CMH02A				
5 A	TO-220NIS#	35 ns	5DLZ47A		5GLZ47A 5JLZ47* 5JLZ47A	⑥			
Average Output Current	Center-tap type	5 A	TO-220AB	5DL2C41A			⑧	21	
			TO-220FL	5DL2C48A	5FL2C48A		⑦		
			TO-220NIS	5DL2CZ47A	5FL2CZ47A	5GL2CZ47A	5JL2CZ47*		⑨
			TO-220SM	5DL2C48A	U5FL2C48A		⑳		
		TO-220AB	10DL2C41A			⑧			
		10 A	TO-220FL	10DL2C48A	10FL2C48A		⑦		
			TO-220NIS	10DL2CZ47A	10FL2CZ47A	10GL2CZ47A	10JL2CZ47* 10JL2CZ47A	⑨	
			TO-220SM	U10DL2C48A	U10FL2C48A		U10JL2C48A	⑳	
		16 A	TO-3P(N)	16DL2C41A	16FL2C41A			⑩	22
			TO-220NIS	16DL2CZ47A	16FL2CZ47A			⑨	
		20 A	TO-3P(N)	20DL2C41A	20FL2C41A	20GL2C41A	20JL2C41* 20JL2C41A	⑩	22
			TO-220FL	20DL2C48A	20FL2C48A			⑦	21
			TO-220NIS	20DL2CZ47A	20FL2CZ47A			⑨	
			TO-220SM	U20DL2C48A	U20FL2C48A	U20GL2C48A	U20JL2C48A	⑳	
			TO-3P(N)IS	20DL2CZ51A	20FL2CZ51A			⑪	
30 A	TFP	35 ns	U20DL2C53A		U20GL2C53A	⑫	22		
	TO-3P(N)	50 ns			30JL2C41	⑩			

\*: trr ≤ 50 ns #: Center lead less

# 2. Selection Guide by Product Categories

## Schottky Barrier Diodes (SBDs)

	Package	Peak Repetitive Reverse Voltage					Package Number	Page Listing		
		20V	30V	40V	60V	120V				
Average Forward Current	Single type	1 A	US-FLAT <b>NEW</b>	CUS01,CUS02	CUS03	CUS04	(13)	23		
		S-FLAT	CRS06	CRS01,CRS02 CRS03,CRS05 CRS11	CRS04	CRS12	(14)			
		M-FLAT <b>NEW</b>		CMS08,CMS09	CMS10		(15)			
		PW-MINI			U1GWJ49		(18)	24		
		DO-41S			1GWJ42		(2)			
		DO-41SS		1FWJ43N 1FWJ43L 1FWJ43M	1GWJ43		(1)			
		I-FLAT		U1FWJ44N U1FWJ44L U1FWJ44M	U1GWJ44		(16)			
		VS-8 <b>NEW</b>		TPCF8E02			(17)	24		
	1.5 A	S-FLAT		CRS08,CRS09			(14)	23		
	M-FLAT <b>NEW</b>		CMS06,CMS07	CMS11	CMS14	(15)				
	2 A	DO-15L		2FWJ42N 2FWJ42M	2GWJ42		(5)	25		
	I-FLAT		U2FWJ44N U2FWJ44M	U2GWJ44			(16)	24		
	3 A	M-FLAT <b>NEW</b>		CMS01,CMS02 CMS03	CMS16	CMS15	(15)	23		
	5 A	M-FLAT		CMS04,CMS05			(15)	23		
	TO-220NIS#				5GWJZ47		(6)	25		
	Average Output Current	Center-tap type	1 A	PW-MINI		U1GWJ2C49		(19)	26	
DP				U5FWK2C42			(20)			
5 A			TO-220FL		5FWJ2C48M	5GWJ2C48C		(7)	27	
TO-220NIS				5FWJ2CZ47M	5GWJ2CZ47C		(9)			
TO-220SM				U5FWJ2C48M	U5GWJ2C48C		(21)			
TO-220FL				10FWJ2C48M	10GWJ2C48C		(7)			
10 A			TO-220NIS		10FWJ2CZ47M	10GWJ2CZ47C		(9)	28	
TO-220SM				U10FWJ2C48M	U10GWJ2C48C		(21)			
TO-220FL				20FWJ2C48M			(7)			
20 A			TO-220NIS		20FWJ2CZ47M			(9)	27	
TO-220SM				U20FWJ2C48M			(21)			
TO-3P(N)						30GWJ2C42C		(10)	28	
TO-220FL				30FWJ2C48M	30GWJ2C48M		30QWK2C48	(7)		
30 A			TO-220NIS		30FWJ2CZ47M	30GWJ2CZ47C		30QWK2CZ47	(9)	27
TO-220SM				U30FWJ2C48M	U30GWJ2C48C			(21)	28	
TFP		U30FWJ2C53M	U30GWJ2C53C		U30QWK2C53	(22)				

#: Center lead less

# Zener Diodes

## ● Power Zener Diodes

Note	0.2 W <b>NEW</b>	0.7 W	1 W						1.5 W	2 W <b>NEW</b>	5 W	
	±10%	±10%	±10%	±10%	±5%	±10%	±5%	±10%	±10%	±10%		
Package Vz(V)	USC (SMD)	S-FLAT (SMD)	DO-41SS			DO-15		I-FLAT (SMD)	DO-15L	M-FLAT (SMD)	MR (SMD)	
6.2		CRY62					1Z6.2					
6.8		CRY68	1ZB6.8				1Z6.8	1Z6.8A	U1ZB6.8			
7.5		CRY75	1ZB7.5				1Z7.5	1Z7.5A	U1ZB7.5			
8.2		CRY85	1ZB8.2				1Z8.2	1Z8.2A	U1ZB8.2			
9.1		CRY91	1ZB9.1				1Z9.1	1Z9.1A	U1ZB9.1			
10		CRZ10	1ZB10				1Z10	1Z10A	U1ZB10			
11		CRZ11	1ZB11				1Z11	1Z11A	U1ZB11			
12		CRZ12	1ZB12	1ZC12	1ZC12A		1Z12	1Z12A	U1ZB12	2Z12	CMZ12	
13		CRZ13	1ZB13	1ZC13	1ZC13A		1Z13	1Z13A	U1ZB13	2Z13	CMZ13	
15		CRZ15	1ZB15	1ZC15	1ZC15A		1Z15	1Z15A	U1ZB15	2Z15	CMZ15	
16		CRZ16	1ZB16	1ZC16	1ZC16A		1Z16	1Z16A	U1ZB16	2Z16	CMZ16	
18		CRZ18	1ZB18	1ZC18	1ZC18A		1Z18	1Z18A	U1ZB18	2Z18	CMZ18	
20		CRZ20	1ZB20	1ZC20	1ZC20A		1Z20	1Z20A	U1ZB20	2Z20	CMZ20	
22		CRZ22	1ZB22	1ZC22	1ZC22A		1Z22	1Z22A	U1ZB22	2Z22	CMZ22	
24		CRZ24	1ZB24	1ZC24	1ZC24A		1Z24	1Z24A	U1ZB24	2Z24	CMZ24	
27		CRZ27	1ZB27	1ZC27	1ZC27A		1Z27	1Z27A	U1ZB27	2Z27	CMZ27	U5ZA27(Z) U5ZA27C
30		CRZ30	1ZB30	1ZC30	1ZC30A		1Z30	1Z30A	U1ZB30	2Z30	CMZ30	
33		CRZ33	1ZB33	1ZC33	1ZC33A		1Z33		U1ZB33	2Z33	CMZ33	
36		CRZ36	1ZB36	1ZC36	1ZC36A		1Z36		U1ZB36	2Z36	CMZ36	
39		CRZ39		1ZC39	1ZC39A						CMZ39	
40												U5ZA40C
43		CRZ43	1ZB43	1ZC43	1ZC43A		1Z43		U1ZB43		CMZ43	
47		CRZ47	1ZB47	1ZC47	1ZC47A		1Z47		U1ZB47	2Z47	CMZ47	
48												U5ZA48C
51			1ZB51	1ZC51	1ZC51A		1Z51		U1ZB51	2Z51	CMZ51	
53											CMZ53	U5ZA53C
56				1ZC56	1ZC56A							
62				1ZC62	1ZC62A							
68			1ZB68	1ZC68	1ZC68A		1Z68		U1ZB68			
75			1ZB75	1ZC75	1ZC75A		1Z75		U1ZB75			
82			1ZB82	1ZC82	1ZC82A		1Z82		U1ZB82			
91				1ZC91	1ZC91A							
100			1ZB100	1ZC100	1ZC100A		1Z100		U1ZB100			
110			1ZB110	1ZC110	1ZC110A		1Z110		U1ZB110			
120				1ZC120	1ZC120A							
150			1ZB150				1Z150		U1ZB150			
180			1ZB180				1Z180		U1ZB180			
200			1ZB200						U1ZB200			
220			1ZB220						U1ZB220			
240			1ZB240						U1ZB240			
270			1ZB270						U1ZB270			
300	U02Z300N		1ZB300						U1ZB300			
330			1ZB330						U1ZB330			
390			1ZB390						U1ZB390			
Package Number	⑫	⑭	①	①	①	④	④	⑩	⑤	⑮	⑳	
Page Listing	29	30	31	32	32	34	34	33	35	36	37	

Note: ± and % indicate Vz tolerance

## ● Bi-directional Zener Diodes

Part Number	Allowable Power Dissipation (W)	Package	VZ(V)	Package Number	Page Listing
CMZM16 <b>NEW</b>	1W	M-FLAT	16	⑮	36

# 3. Definitions and Terms

## (1) General-Purpose Rectifiers

- Plastic mold type
- Various product line from  $I_F = 0.7 \text{ A}$  to  $10 \text{ A}$
- Needs meet to lead formed products
- Needs meet to tape packed products
- The material used in the manufacture of these rectifiers is 94V-0, which has been approved by the UL.

## (2) High-Speed Rectifiers

### SBDs (Schottky Barrier Diodes)

- Voltage Rating:  $V_{RRM} = 30 \text{ V}, 40 \text{ V}, 60 \text{ V}$  and  $120 \text{ V}$
- Current Rating:  $I_O = 1 \text{ A}$  to  $30 \text{ A}$
- Forward Voltage Drop:
 

$V_{FM} = 0.32 \text{ V typ. (0.37 V max)} \dots V_{RRM} = 30 \text{ V}$	$V_{FM} = 0.48 \text{ V typ. (0.55 V max)} \dots V_{RRM} = 40 \text{ V}$
$V_{FM} = 0.34 \text{ V typ. (0.40 V max)} \dots V_{RRM} = 30 \text{ V}$	$V_{FM} = 0.52 \text{ V typ. (0.58 V max)} \dots V_{RRM} = 60 \text{ V}$
$V_{FM} = 0.42 \text{ V typ. (0.45 V max)} \dots V_{RRM} = 30 \text{ V}$	$V_{FM} = 0.8 \text{ V typ. (0.85 V max)} \dots V_{RRM} = 120 \text{ V}$
$V_{FM} = 0.43 \text{ V typ. (0.47 V max)} \dots V_{RRM} = 30 \text{ V}$	All three types supports high-efficiency design of switching power supplies with low $V_{FM}$ and low $I_R$ .
- Current Balance: Center-tap SBDs are monolithic in structure and capable of parallel operation.

### HEDs (High-Efficiency Diodes)

- Voltage Rating:  $V_{RRM} = 200, 300, 400$  and  $600 \text{ V}$
- Current Rating:  $I_O = 1$  to  $30 \text{ A}$
- High-Speed Switching: Reverse Recovery Time ( $t_{rr}$ ) =  $35 \text{ ns max}$
- Current Balance: Center-tap SBDs are monolithic in structure and capable of parallel operation

### S-FRDs (Super-Fast Recovery Diodes)

- Voltage Rating:  $V_{RRM} = 400 \text{ V}, 600 \text{ V}, 800 \text{ V}, 1000 \text{ V}$  (high voltage)
- Current Rating:  $I_{F(AV)} = 0.5 \text{ A}$  to  $5 \text{ A}$
- High-Speed Switching: Reverse recovery time ( $t_{rr}$ )  $\leq 100 \text{ ns max}$


### V-FRDs (Very-Fast Recovery Diodes)

- Voltage Rating:  $V_{RRM} = 400 \text{ V}, 600 \text{ V}, 1000 \text{ V}$  (high voltage)
- Forward Voltage Drop:
 

$V_{FM} = 0.95 \text{ V typ. (1.1 V max)} \dots V_{RRM} = 400 \text{ V}$	
$V_{FM} = 1.05 \text{ V typ. (1.2 V max)} \dots V_{RRM} = 600 \text{ V}$	
$V_{FM} = 1.20 \text{ V typ. (1.5 V max)} \dots V_{RRM} = 1000 \text{ V}$	

 High voltage and low forward voltage drop
- High-Speed Switching: Reverse recovery time ( $t_{rr}$ )  $\leq 200 \text{ ns max}$

## (3) Various Types of Rectifiers

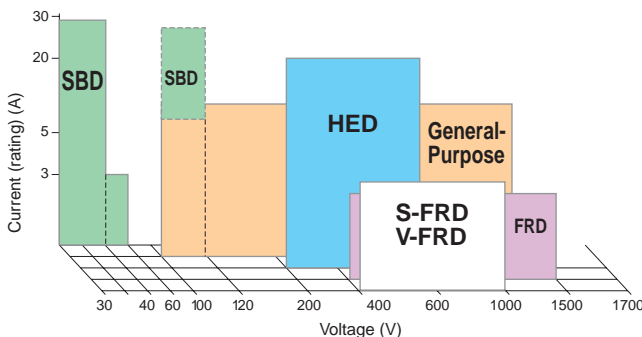

### Characteristics (intended value)

	Forward Voltage Characteristics	Applied Frequency
<b>SBD</b>	0.3 V to 0.85 V	200 kHz or more
<b>HED</b>	0.98 V to 4.0 V	Up to 200 kHz
<b>S-FRD</b>	1.2 V to 3.3 V	Up to 100 kHz
<b>V-FRD</b>	1.1 V to 1.5 V	Up to 60 kHz
<b>FRD</b>	1.2 V to 2.0 V	Up to 20 kHz
<b>General-Purpose</b>	0.95 V to 1.2 V	Up to 3 kHz


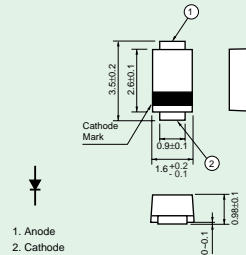

# 4. Symbols and Terms


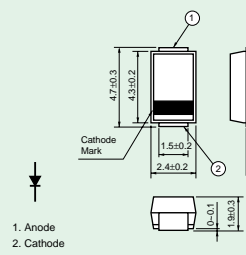

Symbols	Terms	Definitions
$I_F (AV)$	Average Forward Current	Maximum average current value at a half sine wave (conduction angle 180°) of commercial power supply frequency (50 Hz / 60 Hz) that can flow in the diode under specified conditions
$I_o$	Average Output Current	Maximum average current value at the full sine wave (conduction angle 360°) of commercial power supply frequency (50 Hz / 60 Hz) that can flow in the diode under specified conditions
$V_{RRM}$	Peak Repetitive Reverse Voltage	Instantaneous maximum allowable value of reverse voltage that can be applied repeatedly to the diode
$I_{FSM}$	Non-Repetitive Peak Surge Current	Non-repetitive maximum allowable peak current in one cycle of a 50-Hz sine wave (conduction angle 180°) that can flow in the forward direction of the diode at a specified junction temperature. This rating is only applied for an abnormal operation, which seldom occurs during device's lifespan.
$T_{j(max)}$	Junction Temperature	The maximum junction temperature at which the device's reliability and lifetime can be guaranteed. To enhance reliability of a device, please note that 80% derating for the $T_j$ rating is recommended.
$T_{stg}$	Storage Temperature	The storage temperature $T_{stg}$ refers to the ambient temperature range within which the device can be stored while not operating
$I_{RRM}$	Peak Repetitive Reverse Current	Maximum reverse-leakage current value when the specified reverse voltage $V_{RRM}$ is applied
$V_{FM}$	Peak Forward Voltage	Maximum value of voltage drop when the specified forward current $I_{FM}$ flows
$t_{rr}$	Reverse Recovery Time	The time required for the current to reach a specified reverse current, after instantaneous switching from forward to reverse (See Figure 1 below.)
$V_Z$	Zener Voltage	Voltage value when the specified $I_Z$ current flows in reverse between the anode and cathode of a zener diode
$r_d$	Zener Impedance	Ratio of change in zener voltage to corresponding change in specified current $I_Z$ in zener area
$\alpha_T$	Temperature Coefficient of Zener Voltage	Ratio of change in zener voltage to corresponding change in junction temperature
$P$	Zener Power Dissipation	Maximum power dissipation under specified conditions

# 5. Device Characteristics




## 5.1 General-Purpose Rectifiers

### Single

S-FLAT™		Package Appearance	Package Dimensions (mm)				Marking		
			 <p>1. Anode 2. Cathode</p>				Typical  Laser Mark		
		Package Number (14)							
Part Number	Maximum Ratings					Electrical Characteristics			
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	
<b>CRG01</b>	100	0.7	15	-40 to 150	-40 to 150	10	1.1	0.7	
<b>CRG02</b>	400	0.7	15	-40 to 150	-40 to 150	10	1.1	0.7	
<b>CRG03</b>	400	1.0	15	-40 to 150	-40 to 150	10	1.1	0.7	




I-FLAT™		Package Appearance	Package Dimensions (mm)				Marking		
			 <p>1. Anode 2. Cathode</p>				Typical  Laser Mark		
		Package Number (16)							
Part Number	Maximum Ratings					Electrical Characteristics			
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	
<b>U1BC44</b>	100	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0	
<b>U1GC44</b>	400	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0	
<b>*U1GC44S</b>	400	1.0	30	-40 to 150	-40 to 150	10	1.0	1.0	
<b>U1JC44</b>	600	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0	


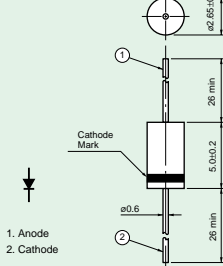

\*: For strobe discharge circuit

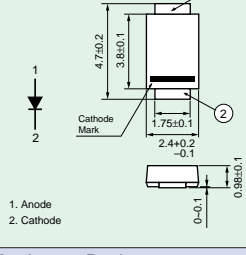
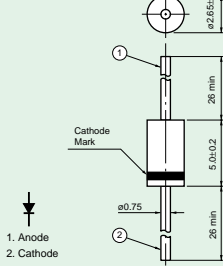

M-FLAT™		Package Appearance	Package Dimensions (mm)				Marking		
			 <p>1. Anode 2. Cathode</p>				Typical  Laser Mark		
		Package Number (15)							
Part Number	Maximum Ratings					Electrical Characteristics			
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	
<b>CMG02</b>	400	2.0	80	-40 to 150	-40 to 150	10	1.1	2.0	
<b>*CMC01</b>	400	1.0	30	-40 to 150	-40 to 150	10	1.0	1.0	

\*: For strobe discharge circuit

● Single

DO-41SS	<b>Package Appearance</b>	<b>Package Dimensions (mm)</b>	<b>Marking</b>					
	 Package Number ①	 1. Anode 2. Cathode	Typical  Color: Silver					
	<b>Part Number</b>	<b>Maximum Ratings</b>				<b>Electrical Characteristics</b>		
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)
S5688B	100	1.0	45	-40 to 150	-40 to 150	10	1.2	1.0
S5688G	400	1.0	45	-40 to 150	-40 to 150	10	1.2	1.0
S5688J	600	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0
S5688N	1000	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0




DO-41S	<b>Package Appearance</b>	<b>Package Dimensions (mm)</b>	<b>Marking</b>					
	 Package Number ②	 1. Anode 2. Cathode	Typical  Color: Silver					
	<b>Part Number</b>	<b>Maximum Ratings</b>				<b>Electrical Characteristics</b>		
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)
S5566B	100	1.0	45	-40 to 150	-40 to 150	10	1.2	1.0
S5566G	400	1.0	45	-40 to 150	-40 to 150	10	1.2	1.0
S5566J	600	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0
S5566N	1000	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0

DO-41	<b>Package Appearance</b>	<b>Package Dimensions (mm)</b>	<b>Marking</b>					
	 Package Number ③	 1. Anode 2. Cathode	Typical  Color: Silver					
	<b>Part Number</b>	<b>Maximum Ratings</b>				<b>Electrical Characteristics</b>		
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)
S5277B	100	1.0	50	-40 to 150	-40 to 150	10	1.2	1.0
S5277G	400	1.0	50	-40 to 150	-40 to 150	10	1.2	1.0
S5277J	600	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0
S5277N	1000	1.0	30	-40 to 150	-40 to 150	10	1.2	1.0




# 5. Device Characteristics

## Single


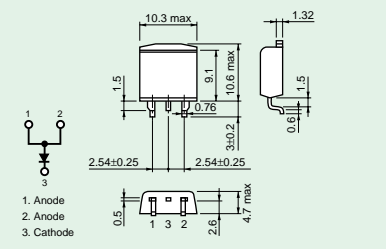

**DO-15**

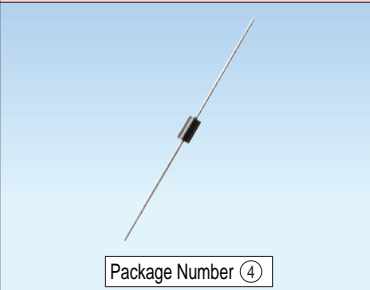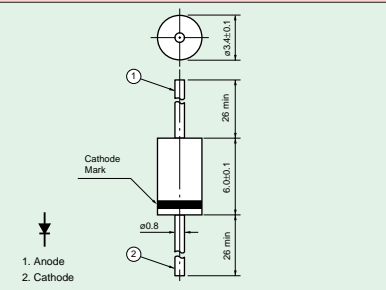Package Appearance	Package Dimensions (mm)	Marking						
 Package Number ④	 1. Anode 2. Cathode	Typical  Color: Silver						
Part Number	Maximum Ratings					Electrical Characteristics		
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)
1S1885	100	1.0	60	-40 to 150	-40 to 150	10	1.2	1.5
1S1887	400	1.0	60	-40 to 150	-40 to 150	10	1.2	1.5
1S1888	600	1.0	60	-40 to 150	-40 to 150	10	1.2	1.5
1S1830	1000	1.0	45	-40 to 150	-40 to 150	10	1.2	1.5
1S1885A	100	1.2	100	-40 to 150	-40 to 150	10	1.0	5.0
1S1887A	400	1.2	100	-40 to 150	-40 to 150	10	1.0	5.0
1S1888A	600	1.2	100	-40 to 150	-40 to 150	10	1.0	5.0

**DO-15L**

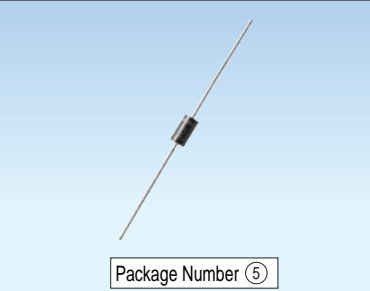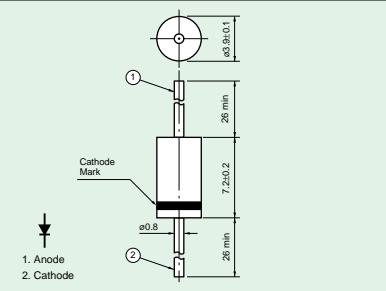


Package Appearance	Package Dimensions (mm)	Marking						
 Package Number ⑤	 1. Anode 2. Cathode	Typical  Color: Silver						
Part Number	Maximum Ratings					Electrical Characteristics		
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)
1R5BZ41	100	1.5	150	-40 to 150	-40 to 150	10	0.95	1.5
1R5GZ41	400	1.5	150	-40 to 150	-40 to 150	10	0.95	1.5
1R5JZ41	600	1.5	100	-40 to 150	-40 to 150	10	1.0	1.5
1R5NZ41	1000	1.5	100	-40 to 150	-40 to 150	10	1.0	1.5


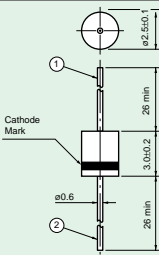

**TO-220SM**


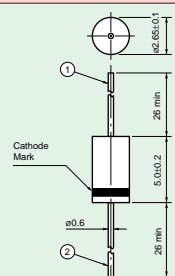

Package Appearance	Package Dimensions (mm)	Marking						
 Package Number ②①	 1. Anode 2. Anode 3. Cathode	Typical  Laser Mark						
Part Number	Maximum Ratings					Electrical Characteristics		
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)
U10LC48	800	10	180	-40 to 150	-40 to 150	30	1.2	10

## 5.2 High-Speed Rectifiers (1) Fast Recovery Rectifiers: FRDs

### Single


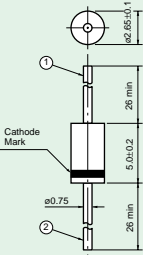

Package Appearance		Package Dimensions (mm)				Marking				
 <p>Package Number ⑬</p>		 <p>1. Anode 2. Cathode</p>				Typical  <p>Laser Mark</p>				
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (μs)	Cond.
U05GH44	400	0.5	20	-40 to 125	-40 to 125	10	1.2	0.5	1.5	$I_F = 20$ mA, $I_R = 1$ mA
U05JH44	600	0.5	20	-40 to 125	-40 to 125	10	1.2	0.5	1.5	$I_F = 20$ mA, $I_R = 1$ mA
U05NH44	1000	0.5	20	-40 to 125	-40 to 125	10	1.5	0.5	4.0	$I_F = 20$ mA, $I_R = 1$ mA
U05TH44	1500	0.5	20	-40 to 125	-40 to 125	10	1.5	0.5	4.0	$I_F = 20$ mA, $I_R = 1$ mA


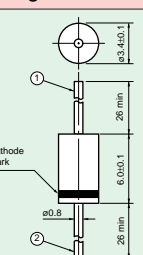

Package Appearance		Package Dimensions (mm)				Marking				
 <p>Package Number ①</p>		 <p>1. Anode 2. Cathode</p>				Typical  <p>Color: Silver</p>				
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (μs)	Cond.
TFR7H	500	0.2	10	-40 to 125	-40 to 125	10	1.5	0.3	10	$I_F = 20$ mA, $I_R = 1$ mA
TFR4N	1000	0.3	10	-40 to 125	-40 to 125	10	1.5	0.5	4	$I_F = 20$ mA, $I_R = 1$ mA
TFR4T	1500	0.3	10	-40 to 125	-40 to 125	10	1.5	0.5	4	$I_F = 20$ mA, $I_R = 1$ mA
TVR5B	100	0.5	20	-40 to 125	-40 to 125	10	1.2	0.5	1.5	$I_F = 20$ mA, $I_R = 1$ mA
TVR5G	400	0.5	20	-40 to 125	-40 to 125	10	1.2	0.5	1.5	$I_F = 20$ mA, $I_R = 1$ mA
TVR5J	600	0.5	20	-40 to 125	-40 to 125	10	1.2	0.5	1.5	$I_F = 20$ mA, $I_R = 1$ mA
1NH42	1000	1.0	30	-40 to 150	-40 to 150	10	1.3	1.0	0.4	$I_F = 1$ A, $di/dt = -30$ A/μs


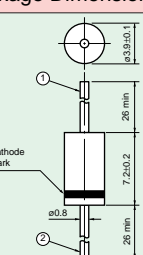

Package Appearance		Package Dimensions (mm)				Marking				
 <p>Package Number ②</p>		 <p>1. Anode 2. Cathode</p>				Typical  <p>Color: Silver</p>				
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (μs)	Cond.
TFR3N	1000	0.2	10	-40 to 125	-40 to 125	5	1.5	0.1	1.5	$I_F = 10$ mA, $I_R = 10$ mA
TFR3T	1500	0.2	10	-40 to 125	-40 to 125	5	1.5	0.1	1.5	$I_F = 10$ mA, $I_R = 10$ mA
1NH41	1000	1.0	30	-40 to 150	-40 to 150	10	1.3	1.0	0.4	$I_F = 1$ A, $di/dt = -30$ A/μs

# 5. Device Characteristics

## Single


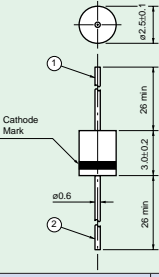

DO-41	<b>Package Appearance</b>	<b>Package Dimensions (mm)</b>	<b>Marking</b>							
	 Package Number ③	 1. Anode 2. Cathode	Typical  Color: Silver							
	<b>Part Number</b>	<b>Maximum Ratings</b>				<b>Electrical Characteristics</b>				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (μs)	Cond.
<b>TVR1B</b>	100	0.5	10	-40 to 125	-40 to 125	10	1.2	0.5	2.0	$I_F = 20$ mA, $I_R = 1$ mA
<b>TVR1G</b>	400	0.5	10	-40 to 125	-40 to 125	10	1.2	0.5	2.0	$I_F = 20$ mA, $I_R = 1$ mA
<b>TVR1J</b>	600	0.5	10	-40 to 125	-40 to 125	10	1.2	0.5	2.0	$I_F = 20$ mA, $I_R = 1$ mA
<b>TFR2N</b>	1000	0.5	20	-40 to 125	-40 to 125	10	1.5	0.5	4.0	$I_F = 20$ mA, $I_R = 1$ mA
<b>TFR2T</b>	1500	0.5	20	-40 to 125	-40 to 125	10	1.5	0.5	4.0	$I_F = 20$ mA, $I_R = 1$ mA
<b>TFR1N</b>	1000	0.5	20	-40 to 125	-40 to 125	10	1.3	0.5	10	$I_F = 20$ mA, $I_R = 1$ mA
<b>TFR1T</b>	1500	0.5	20	-40 to 125	-40 to 125	10	1.3	0.5	10	$I_F = 20$ mA, $I_R = 1$ mA
<b>TVR2B</b>	100	0.5	30	-40 to 125	-40 to 125	10	1.4	1.0	20	$I_F = 20$ mA, $I_R = 1$ mA
<b>TVR2G</b>	400	0.5	30	-40 to 125	-40 to 125	10	1.4	1.0	20	$I_F = 20$ mA, $I_R = 1$ mA
<b>TVR2J</b>	600	0.5	30	-40 to 125	-40 to 125	10	1.4	1.0	20	$I_F = 20$ mA, $I_R = 1$ mA


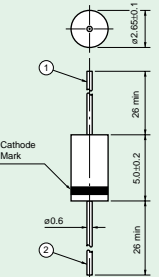

DO-15	<b>Package Appearance</b>	<b>Package Dimensions (mm)</b>	<b>Marking</b>							
	 Package Number ④	 1. Anode 2. Cathode	Typical  Color: Silver							
	<b>Part Number</b>	<b>Maximum Ratings</b>				<b>Electrical Characteristics</b>				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (μs)	Cond.
<b>S5295B</b>	100	0.5	30	-40 to 125	-40 to 125	10	1.5	1.0	1.5	$I_F = 20$ mA, $I_R = 1$ mA
<b>S5295G</b>	400	0.5	30	-40 to 125	-40 to 125	10	1.5	1.0	1.5	$I_F = 20$ mA, $I_R = 1$ mA
<b>S5295J</b>	600	0.5	30	-40 to 125	-40 to 125	10	1.5	1.0	1.5	$I_F = 20$ mA, $I_R = 1$ mA
<b>1S1832</b>	1800	0.7	60	-40 to 125	-40 to 125	10	2.0	1.5	6.0	$I_F = 20$ mA, $I_R = 1$ mA
<b>1S1834</b>	400	1.0	60	-40 to 125	-40 to 125	10	1.2	1.5	1.5	$I_F = 20$ mA, $I_R = 1$ mA
<b>1S1835</b>	600	1.0	60	-40 to 125	-40 to 125	10	1.2	1.5	1.5	$I_F = 20$ mA, $I_R = 1$ mA




DO-15L	<b>Package Appearance</b>	<b>Package Dimensions (mm)</b>	<b>Marking</b>							
	 Package Number ⑤	 1. Anode 2. Cathode	Typical  Color: Silver							
	<b>Part Number</b>	<b>Maximum Ratings</b>				<b>Electrical Characteristics</b>				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (μs)	Cond.
<b>TVR4J</b>	600	1.2	100	-40 to 150	-40 to 150	10	1.2	5	20	$I_F = 20$ mA, $I_R = 1$ mA
<b>TVR4N</b>	1000	1.2	100	-40 to 150	-40 to 150	10	1.2	5	20	$I_F = 20$ mA, $I_R = 1$ mA
<b>1R5NH41</b>	1000	1.5	80	-40 to 150	-40 to 150	10	1.3	1.5	0.4	$I_F = 1$ A, $di/dt = -30$ A/μs

## 5.2 High-Speed Rectifiers (2) Very-Fast Recovery Diodes: V-FRDs

### Single

DO-41SS	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ①	 1. Anode 2. Cathode	Typical  Color: Silver							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>05NH46</b>	1000	0.5	15	-40 to 150	-40 to 150	100	1.5	0.5	200	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1GH46</b>	400	1.0	15	-40 to 150	-40 to 150	100	1.1	1.0	200	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1JH46</b>	600	1.0	15	-40 to 150	-40 to 150	100	1.2	1.0	200	$I_F = 1$ A, $di/dt = -30$ A/μs


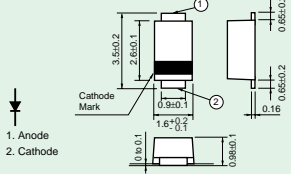

DO-41S	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ②	 1. Anode 2. Cathode	Typical  Color: Silver							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>05NH45</b>	1000	0.5	20	-40 to 150	-40 to 150	100	1.5	0.5	200	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1GH45</b>	400	1.0	20	-40 to 150	-40 to 150	100	1.1	1.0	200	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1JH45</b>	600	1.0	20	-40 to 150	-40 to 150	100	1.2	1.0	200	$I_F = 1$ A, $di/dt = -30$ A/μs

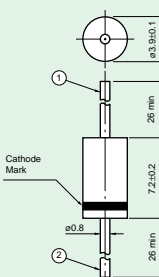DO-15L	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑤	 1. Anode 2. Cathode	Typical  Color: Silver							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>1R5GH45</b>	400	1.5	50	-40 to 150	-40 to 150	100	1.1	1.5	200	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1R5JH45</b>	600	1.5	50	-40 to 150	-40 to 150	100	1.2	1.5	200	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1R5NH45</b>	1000	1.5	30	-40 to 150	-40 to 150	100	1.5	1.5	200	$I_F = 1$ A, $di/dt = -30$ A/μs


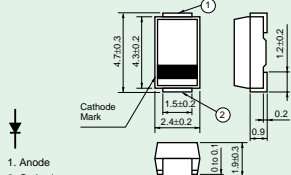

# 5. Device Characteristics




## 5.2 High-Speed Rectifiers (3) Super-Fast Recovery Diodes: S-FRDs




### Single

S-FLAT™	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑭	 1. Anode 2. Cathode	Typical  Laser Mark							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
*CRF02	800	0.5	10	-40 to 150	-40 to 150	50	3.0	0.5	100	$I_F = 1$ A, $di/dt = -30$ A/μs
CRF03	600	0.7	10	-40 to 150	-40 to 150	50	2.0	0.7	100	$I_F = 1$ A, $di/dt = -30$ A/μs


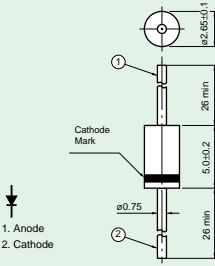

\*: For strobe discharge circuit


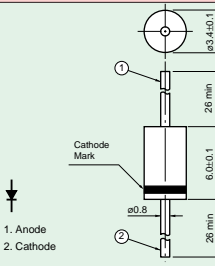

I-FLAT™	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑮	 1. Anode 2. Cathode	Typical  Laser Mark							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
U05NU44	1000	0.5	10	-40 to 150	-40 to 150	100	3.0	0.5	100	$I_F = 1$ A, $di/dt = -30$ A/μs
U1GU44	400	1.0	15	-40 to 150	-40 to 150	50	1.5	1.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs
U1JU44	600	1.0	15	-40 to 150	-40 to 150	100	2.0	1.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs


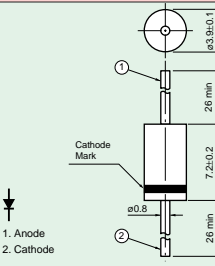

DO-41SS	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ①	 1. Anode 2. Cathode	Typical  Color: Silver							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
05NU42	1000	0.5	10	-40 to 150	-40 to 150	100	3.0	0.5	100	$I_F = 1$ A, $di/dt = -30$ A/μs
1GU42	400	1.0	15	-40 to 150	-40 to 150	50	1.5	1.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs
1JU42	600	1.0	15	-40 to 150	-40 to 150	100	2.0	1.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs


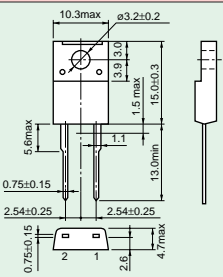

DO-41S	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ②	 1. Anode 2. Cathode	Typical  Color: Silver							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
05NU41	1000	0.5	10	-40 to 150	-40 to 150	100	3.0	0.5	100	$I_F = 1$ A, $di/dt = -30$ A/μs
1JU41	600	1.0	30	-40 to 150	-40 to 150	100	2.0	1.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs

● Single

DO-41	Package Appearance			Package Dimensions (mm)				Marking		
	 <p>Package Number ③</p>			 <p>1. Anode 2. Cathode</p>				<p>Typical</p>  <p>Color: Silver</p>		
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>OR8GU41</b>	400	0.8	30	-40 to 150	-40 to 150	50	1.5	1.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs

DO-15	Package Appearance			Package Dimensions (mm)				Marking		
	 <p>Package Number ④</p>			 <p>1. Anode 2. Cathode</p>				<p>Typical</p>  <p>Color: Silver</p>		
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>1NU41</b>	1000	1.0	10	-40 to 150	-40 to 150	100	3.3	1.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs




DO-15L	Package Appearance			Package Dimensions (mm)				Marking		
	 <p>Package Number ⑤</p>			 <p>1. Anode 2. Cathode</p>				<p>Typical</p>  <p>Color: Silver</p>		
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>1R5GU41</b>	400	1.5	60	-40 to 150	-40 to 150	50	1.2	1.5	100	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1R5JU41</b>	600	1.5	40	-40 to 150	-40 to 150	100	2.0	2.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs
<b>1R5NU41</b>	1000	1.5	60	-40 to 150	-40 to 150	100	3.0	2.0	100	$I_F = 1$ A, $di/dt = -30$ A/μs




TO-220NIS (Center lead less)	Package Appearance			Package Dimensions (mm)				Marking		
	 <p>Package Number ⑥</p>			 <p>1. Anode 2. Cathode</p>				<p>Typical</p>  <p>Laser Mark</p>		
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>5GUZ47</b>	400	5.0	50	-40 to 150	-40 to 150	100	1.2	5.0	100	$I_F = 2$ A, $di/dt = -20$ A/μs
<b>5JUZ47</b>	600	5.0	50	-40 to 150	-40 to 150	100	1.5	5.0	100	$I_F = 2$ A, $di/dt = -20$ A/μs




# 5. Device Characteristics

## 5.2 High-Speed Rectifiers (4) High-Efficiency Diodes: HEDs




### Single




S-FLAT™	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑭	 1. Anode 2. Cathode	Typical  Laser Mark							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>CRH01</b>	200	1.0	15	-40 to 150	-40 to 150	10	0.98	1.0	35	$I_F = 1\text{ A}$ , $di/dt = -30\text{ A}/\mu\text{s}$




I-FLAT™	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑯	 1. Anode 2. Cathode	Typical  Laser Mark							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>U1DL44A</b>	200	1.0	10	-40 to 150	-40 to 150	10	0.98	1.0	35	$I_F = 1\text{ A}$ , $di/dt = -30\text{ A}/\mu\text{s}$

PW-MINI	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑰	 1. Anode 2. Open 3. Cathode	Typical  Part Number: Pad Print Lot Number: Laser Mark							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>U1DL49</b>	200	1.0	15	-40 to 150	-40 to 150	10	0.98	1.0	60	$I_F = 1\text{ A}$ , $di/dt = -20\text{ A}/\mu\text{s}$

● Single


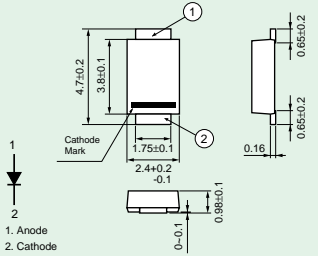

DO-41SS	Package Appearance			Package Dimensions (mm)				Marking		
								Typical  Color: Silver		
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>1DL42A</b>	200	1.0	30	-40 to 150	-40 to 150	100	0.98	1.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs


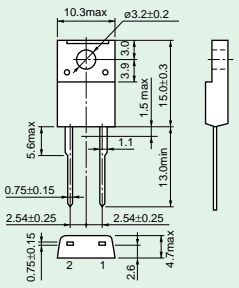

DO-41S	Package Appearance			Package Dimensions (mm)				Marking		
								Typical  Color: Silver		
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>1DL41A</b>	200	1.0	30	-40 to 150	-40 to 150	100	0.98	1.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs

DO-15L	Package Appearance			Package Dimensions (mm)				Marking		
								Typical  Color: Silver		
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
<b>1R5DL41A</b>	200	1.5	60	-40 to 150	-40 to 150	100	0.98	1.5	35	$I_F = 1$ A, $di/dt = -30$ A/μs

# 5. Device Characteristics


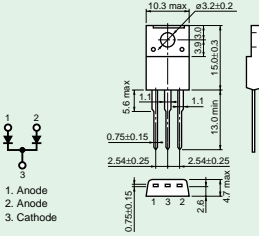

## Single

M-FLAT™	Package Appearance	Package Dimensions (mm)	Marking							
	 <p>Package Number ⑮</p>	 <p>1. Anode 2. Cathode</p>	<p>Typical</p>  <p>Laser Mark</p>							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_r$ (ns)	Cond.
CMH04	200	1.0	20	-40 to 150	-40 to 150	10	0.98	1.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH05	400	1.0	30	-40 to 150	-40 to 150	10	1.5	1.0	50	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH05A	400	1.0	30	-40 to 150	-40 to 150	10	1.8	1.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH07	200	2.0	40	-40 to 150	-40 to 150	10	0.98	2.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH08	400	2.0	40	-40 to 150	-40 to 150	10	1.5	2.0	50	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH08A	400	2.0	40	-40 to 150	-40 to 150	10	1.8	2.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH01	200	3.0	40	-40 to 150	-40 to 150	10	0.98	3.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH02	400	3.0	40	-40 to 150	-40 to 150	10	1.5	3.0	50	$I_F = 1$ A, $di/dt = -30$ A/μs
CMH02A	400	3.0	40	-40 to 150	-40 to 150	10	1.8	3.0	35	$I_F = 1$ A, $di/dt = -30$ A/μs


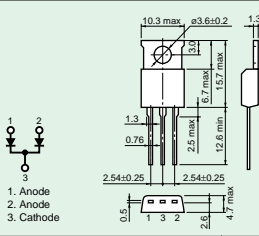

TO-220NIS (Center lead less)	Package Appearance	Package Dimensions (mm)	Marking							
	 <p>Package Number ⑥</p>	 <p>1. Anode 2. Cathode</p>	<p>Typical</p>  <p>Laser Mark</p>							
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_r$ (ns)	Cond.
5DLZ47A	200	5.0	50	-40 to 150	-40 to 150	10	0.98	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
5GLZ47A	400	5.0	50	-40 to 150	-40 to 150	50	1.8	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
5JLZ47	600	5.0	50	-40 to 150	-40 to 150	50	2.0	5.0	50	$I_F = 2$ A, $di/dt = -20$ A/μs
5JLZ47A	600	5.0	40	-40 to 150	-40 to 150	50	4.0	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs

Center-tap


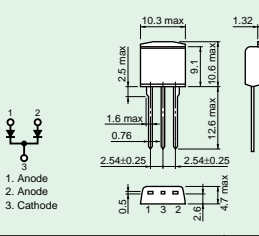

TO-220NIS

Package Appearance		Package Dimensions (mm)				Marking				
 <p>Package Number ⑨</p>		 <p>1. Anode 2. Anode 3. Cathode</p>				<p>Typical</p>  <p>Laser Mark</p>				
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
5DL2CZ47A	200	5.0	25	-40 to 150	-40 to 150	10	0.98	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
5FL2CZ47A	300	5.0	25	-40 to 150	-40 to 150	10	1.3	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
5GL2CZ47A	400	5.0	25	-40 to 150	-40 to 150	50	1.8	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
5JL2CZ47	600	5.0	25	-40 to 150	-40 to 150	50	2.0	2.5	50	$I_F = 2$ A, $di/dt = -20$ A/μs
10DL2CZ47A	200	10	50	-40 to 150	-40 to 150	10	0.98	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
10FL2CZ47A	300	10	50	-40 to 150	-40 to 150	10	1.3	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
10GL2CZ47A	400	10	50	-40 to 150	-40 to 150	50	1.8	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
10JL2CZ47	600	10	50	-40 to 150	-40 to 150	50	2.0	5.0	50	$I_F = 2$ A, $di/dt = -20$ A/μs
10JL2CZ47A	600	10	40	-40 to 150	-40 to 150	50	4.0	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
16DL2CZ47A	200	16	80	-40 to 150	-40 to 150	50	0.98	8.0	35	$I_F = 2$ A, $di/dt = -50$ A/μs
16FL2CZ47A	300	16	80	-40 to 150	-40 to 150	50	1.3	8.0	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20DL2CZ47A	200	20	100	-40 to 150	-40 to 150	50	0.98	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20FL2CZ47A	300	20	100	-40 to 150	-40 to 150	50	1.3	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs

TO-220AB


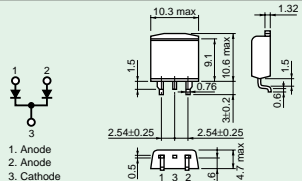

Package Appearance		Package Dimensions (mm)				Marking				
 <p>Package Number ⑧</p>		 <p>1. Anode 2. Anode 3. Cathode</p>				<p>Typical</p>  <p>Laser Mark</p>				
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
5DL2C41A	200	5.0	25	-40 to 150	-40 to 150	10	0.98	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
10DL2C41A	200	10	50	-40 to 150	-40 to 150	10	0.98	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs


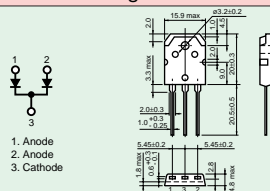

TO-220FL


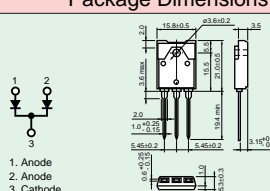

Package Appearance		Package Dimensions (mm)				Marking				
 <p>Package Number ⑦</p>		 <p>1. Anode 2. Anode 3. Cathode</p>				<p>Typical</p>  <p>Laser Mark</p>				
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
5DL2C48A	200	5.0	25	-40 to 150	-40 to 150	10	0.98	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
5FL2C48A	300	5.0	25	-40 to 150	-40 to 150	10	1.3	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
10DL2C48A	200	10	50	-40 to 150	-40 to 150	10	0.98	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
10FL2C48A	300	10	50	-40 to 150	-40 to 150	10	1.3	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
10JL2C48A	600	10	40	-40 to 150	-40 to 150	50	4.0	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
20DL2C48A	200	20	100	-40 to 150	-40 to 150	50	0.98	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20FL2C48A	300	20	100	-40 to 150	-40 to 150	50	1.3	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs


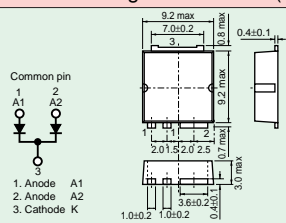

# 5. Device Characteristics

## Center-tap

TO-220SM	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑳	 1. Anode 2. Anode 3. Cathode	Typical  Laser Mark							
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
U5DL2C48A	200	5.0	25	-40 to 150	-40 to 150	10	0.98	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
U5FL2C48A	300	5.0	25	-40 to 150	-40 to 150	10	1.3	2.5	35	$I_F = 2$ A, $di/dt = -20$ A/μs
U10DL2C48A	200	10	50	-40 to 150	-40 to 150	10	0.98	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
U10FL2C48A	300	10	50	-40 to 150	-40 to 150	10	1.3	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
U10JL2C48A	600	10	40	-40 to 150	-40 to 150	50	4.0	5.0	35	$I_F = 2$ A, $di/dt = -20$ A/μs
U20DL2C48A	200	20	100	-40 to 150	-40 to 150	50	0.98	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
U20FL2C48A	300	20	100	-40 to 150	-40 to 150	50	1.3	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
U20GL2C48A	400	20	100	-40 to 150	-40 to 150	50	1.8	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
U20JL2C48A	600	20	80	-40 to 150	-40 to 150	50	3.2	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs




TO-3P(N)	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑩	 1. Anode 2. Anode 3. Cathode	Typical  Color: White							
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
16DL2C41A	200	16	80	-40 to 150	-40 to 150	50	0.98	8.0	35	$I_F = 2$ A, $di/dt = -50$ A/μs
16FL2C41A	300	16	80	-40 to 150	-40 to 150	50	1.3	8.0	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20DL2C41A	200	20	100	-40 to 150	-40 to 150	50	0.98	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20FL2C41A	300	20	100	-40 to 150	-40 to 150	50	1.3	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20GL2C41A	400	20	100	-40 to 150	-40 to 150	50	1.8	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20JL2C41	600	20	100	-40 to 150	-40 to 150	50	2.0	10	50	$I_F = 2$ A, $di/dt = -50$ A/μs
20JL2C41A	600	20	80	-40 to 150	-40 to 150	100	3.2	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
30JL2C41	600	30	150	-40 to 150	-40 to 150	50	2.0	15	50	$I_F = 2$ A, $di/dt = -50$ A/μs




TO-3P(N)IS	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ⑪	 1. Anode 2. Anode 3. Cathode	Typical  Color: White							
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
20DL2CZ51A	200	20	100	-40 to 150	-40 to 150	50	0.98	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
20FL2CZ51A	300	20	100	-40 to 150	-40 to 150	50	1.3	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs

TFP	Package Appearance	Package Dimensions (mm)	Marking							
	 Package Number ㉓	 Common pin 1 A1 2 A2 3 Cathode K 1. Anode A1 2. Anode A2 3. Cathode K	Typical  Laser Mark							
Part Number	Maximum Ratings				Electrical Characteristics					
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (μA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$t_{rr}$ (ns)	Cond.
U20DL2C53A	200	20	100	-40 to 150	-40 to 150	50	0.98	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs
U20GL2C53A	400	20	100	-40 to 150	-40 to 150	50	1.8	10	35	$I_F = 2$ A, $di/dt = -50$ A/μs




## 5.3 Schottky Barrier Diodes: SBDs

### Single

US-FLAT™		Package Appearance	Package Dimensions (mm)	Marking						
		 Package Number ⑬	 1. Anode 2. Cathode	Typical  Laser Mark						
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.
CUS01	30	1.0	20	-40 to 125	-40 to 150	1.5	0.37	0.7	40	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CUS02	30	1.0	20	-40 to 125	-40 to 150	0.1	0.45	0.7	40	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CUS03	40	0.7	20	-40 to 125	-40 to 150	0.1	0.52	0.7	40	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CUS04	60	0.7	20	-40 to 125	-40 to 150	0.1	0.58	0.7	-	-










S-FLAT™		Package Appearance	Package Dimensions (mm)	Marking						
		 Package Number ⑭	 1. Anode 2. Cathode	Typical  Laser Mark						
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.
CRS01	30	1.0	20	-40 to 125	-40 to 125	1.5	0.37	0.7	40	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS02	30	1.0	20	-40 to 125	-40 to 125	0.05	0.4	0.7	40	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS03	30	1.0	20	-40 to 150	-40 to 150	0.1	0.45	0.7	40	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS04	40	1.0	20	-40 to 150	-40 to 150	0.1	0.49	0.7	47	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS05	30	1.0	20	-40 to 150	-40 to 150	*	0.45	1.0	60	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS06	20	1.0	20	-40 to 125	-40 to 125	1.0	0.36	1.0	60	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS08	30	1.5	30	-40 to 125	-40 to 150	1.0	0.36	1.5	90	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS09	30	1.5	30	-40 to 150	-40 to 150	0.05	0.46	1.5	90	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS11	30	1.0	20	-40 to 125	-40 to 150	1.5	0.36	1.0	60	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CRS12	60	1.0	20	-40 to 150	-40 to 150	0.1	0.58	1.0	40	$V_R = 10\text{ V}, f = 1\text{ MHz}$

\* $I_{RRM} = 5\text{ }\mu\text{A Max}$  ( $V_R = 5\text{ V}$ )

M-FLAT™		Package Appearance	Package Dimensions (mm)	Marking						
		 Package Number ⑮	 1. Anode 2. Cathode	Typical  Laser Mark						
Part Number	Maximum Ratings					Electrical Characteristics				
	$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.
CMS01	30	3.0	40	-40 to 125	-40 to 150	5.0	0.37	3.0	190	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS02	30	3.0	40	-40 to 125	-40 to 150	0.5	0.4	3.0	170	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS03	30	3.0	40	-40 to 150	-40 to 150	0.5	0.45	3.0	190	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS04	30	5.0	70	-40 to 125	-40 to 150	8.0	0.37	5.0	330	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS05	30	5.0	70	-40 to 150	-40 to 150	0.8	0.45	5.0	330	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS06	30	2.0	40	-40 to 125	-40 to 150	3.0	0.37	2.0	130	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS07	30	2.0	40	-40 to 150	-40 to 150	0.5	0.45	2.0	130	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS08	30	1.0	25	-40 to 125	-40 to 150	1.5	0.37	1.0	70	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS09	30	1.0	25	-40 to 150	-40 to 150	0.5	0.45	1.0	70	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS10	40	1.0	25	-40 to 150	-40 to 150	0.5	0.55	1.0	50	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS11	40	2.0	30	-40 to 150	-40 to 150	0.5	0.55	2.0	95	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS16	40	3.0	30	-40 to 150	-40 to 150	0.2	0.55	3.0	95	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS14	60	2.0	40	-40 to 150	-40 to 150	0.2	0.58	2.0	77	$V_R = 10\text{ V}, f = 1\text{ MHz}$
CMS15	60	3.0	60	-40 to 150	-40 to 150	0.3	0.58	3.0	102	$V_R = 10\text{ V}, f = 1\text{ MHz}$




# 5. Device Characteristics

## Single

VS-8	Package Appearance	Package Dimensions (mm)	Marking								
	 Package Number ⑰	 1. Anode 1 2. NC 3. NC 4. Anode 2 5. Cathode 2 6. Cathode 1 7. Cathode 1 8. Cathode 1	Typical  Laser Mark								
I-FLAT™	Package Appearance	Package Dimensions (mm)	Marking								
	 Package Number ⑯	 1. Anode 2. Cathode	Typical  Laser Mark								
PW-MINI	Package Appearance	Package Dimensions (mm)	Marking								
	 Package Number ⑱	 1. Anode 2. Open 3. Cathode	Typical  Part Number : Pad Print Lot Number : Laser Mark								
Part Number		Maximum Ratings					Electrical Characteristics				
		$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.
<b>TPCF8E02</b>		30	1.0	7	-40 to 150	-40 to 150	0.1	0.49	1.0	54	$V_R = 10\text{ V}, f = 1\text{ MHz}$
<b>U1FWJ44N</b>		30	1.0	25	-40 to 125	-40 to 125	1.5	0.37	1.0	62	$V_R = 10\text{ V}, f = 1\text{ MHz}$
<b>U1FWJ44L</b>		30	1.0	20	-40 to 125	-40 to 125	0.8	0.4	1.0	60	$V_R = 10\text{ V}, f = 1\text{ MHz}$
<b>U1FWJ44M</b>		30	1.0	20	-40 to 125	-40 to 125	0.5	0.45	1.0	60	$V_R = 10\text{ V}, f = 1\text{ MHz}$
<b>U1GWJ44</b>		40	1.0	25	-40 to 125	-40 to 125	0.5	0.55	1.0	47	$V_R = 10\text{ V}, f = 1\text{ MHz}$
<b>U2FWJ44N</b>		30	2.0	80	-40 to 125	-40 to 125	3.0	0.37	2.0	130	$V_R = 10\text{ V}, f = 1\text{ MHz}$
<b>U2FWJ44M</b>		30	2.0	60	-40 to 125	-40 to 125	0.5	0.45	2.0	125	$V_R = 10\text{ V}, f = 1\text{ MHz}$
<b>U2GWJ44</b>		40	2.0	40	-40 to 125	-40 to 125	0.5	0.55	2.0	125	$V_R = 10\text{ V}, f = 1\text{ MHz}$
Part Number		Maximum Ratings					Electrical Characteristics				
		$V_{RRM}$ (V)	$I_{F(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.
<b>U1GWJ49</b>		40	1.0	15	-40 to 125	-40 to 150	0.5	0.55	1.0	50	$V_R = 10\text{ V}, f = 1\text{ MHz}$




Single

DO-41SS

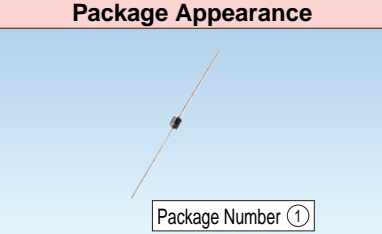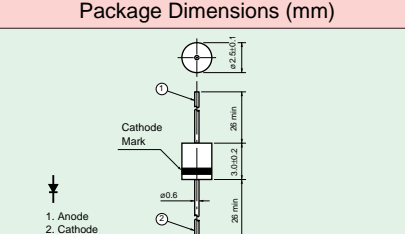Package Appearance	Package Dimensions (mm)	Marking
 Package Number ①	 1. Anode 2. Cathode	Typical  Color: Silver




Part Number	Maximum Ratings					Electrical Characteristics				
	V <sub>RRM</sub> (V)	I <sub>F(AV)</sub> (A)	I <sub>FSM</sub> (A)	T <sub>j</sub> (°C)	T <sub>stg</sub> (°C)	I <sub>RRM</sub> (mA)	V <sub>FM</sub> (V)	@I <sub>FM</sub> (A)	C <sub>j</sub> (pF)(Typ.)	Cond.
<b>1FWJ43N</b>	30	1.0	25	-40 to 125	-40 to 125	1.5	0.37	1.0	62	V <sub>R</sub> = 10V, f = 1MHz
<b>1FWJ43M</b>	30	1.0	20	-40 to 125	-40 to 125	0.5	0.45	1.0	60	V <sub>R</sub> = 10V, f = 1MHz
<b>1FWJ43L</b>	30	1.0	20	-40 to 125	-40 to 125	0.8	0.4	1.0	60	V <sub>R</sub> = 10V, f = 1MHz
<b>1GWJ43</b>	40	1.0	25	-40 to 125	-40 to 125	0.5	0.55	1.0	52	V <sub>R</sub> = 10V, f = 1MHz

DO-41S

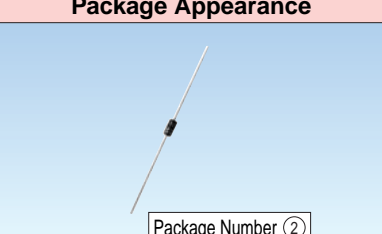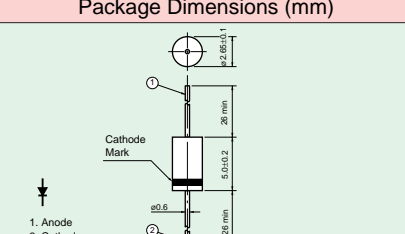Package Appearance	Package Dimensions (mm)	Marking
 Package Number ②	 1. Anode 2. Cathode	Typical  Color: Silver




Part Number	Maximum Ratings					Electrical Characteristics				
	V <sub>RRM</sub> (V)	I <sub>F(AV)</sub> (A)	I <sub>FSM</sub> (A)	T <sub>j</sub> (°C)	T <sub>stg</sub> (°C)	I <sub>RRM</sub> (mA)	V <sub>FM</sub> (V)	@I <sub>FM</sub> (A)	C <sub>j</sub> (pF)(Typ.)	Cond.
<b>1GWJ42</b>	40	1.0	40	-40 to 125	-40 to 125	0.5	0.55	1.0	52	V <sub>R</sub> = 10 V, f = 1 MHz

DO-15L

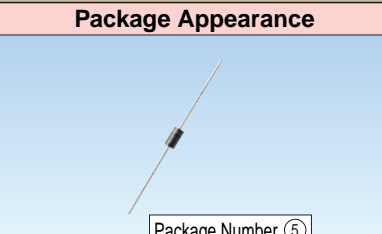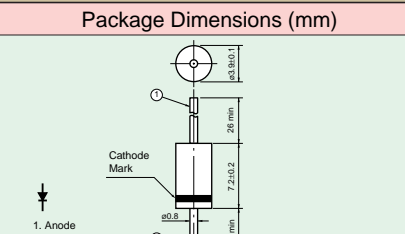Package Appearance	Package Dimensions (mm)	Marking
 Package Number ⑤	 1. Anode 2. Cathode	Typical  Color: Silver

Part Number	Maximum Ratings					Electrical Characteristics				
	V <sub>RRM</sub> (V)	I <sub>F(AV)</sub> (A)	I <sub>FSM</sub> (A)	T <sub>j</sub> (°C)	T <sub>stg</sub> (°C)	I <sub>RRM</sub> (mA)	V <sub>FM</sub> (V)	@I <sub>FM</sub> (A)	C <sub>j</sub> (pF)(Typ.)	Cond.
<b>2FWJ42N</b>	30	2.0	60	-40 to 125	-40 to 125	3.0	0.37	2.0	130	V <sub>R</sub> = 10 V, f = 1 MHz
<b>2FWJ42M</b>	30	2.0	60	-40 to 125	-40 to 125	0.5	0.45	2.0	110	V <sub>R</sub> = 10 V, f = 1 MHz
<b>2GWJ42</b>	40	2.0	100	-40 to 125	-40 to 125	0.5	0.55	2.0	125	V <sub>R</sub> = 10 V, f = 1 MHz
<b>2GWJ42C</b>	40	2.0	40	-40 to 125	-40 to 125	0.5	0.55	2.0	125	V <sub>R</sub> = 10 V, f = 1 MHz


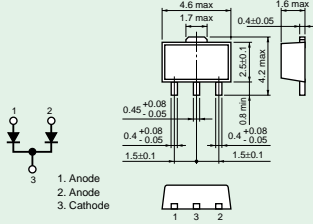

TO-220NIS  
(Center lead less)

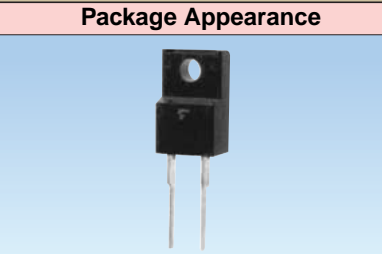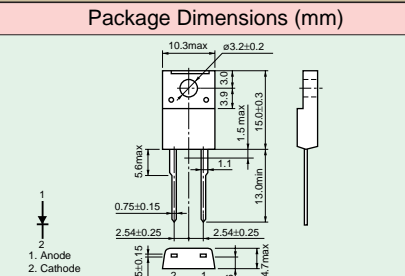
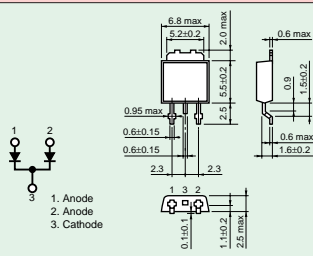

Package Appearance	Package Dimensions (mm)	Marking
 Package Number ⑥	 1. Anode 2. Cathode	Typical  Laser Mark

Part Number	Maximum Ratings					Electrical Characteristics				
	V <sub>RRM</sub> (V)	I <sub>F(AV)</sub> (A)	I <sub>FSM</sub> (A)	T <sub>j</sub> (°C)	T <sub>stg</sub> (°C)	I <sub>RRM</sub> (mA)	V <sub>FM</sub> (V)	@I <sub>FM</sub> (A)	C <sub>j</sub> (pF)(Typ.)	Cond.
<b>5GWJZ47</b>	40	5.0	50	-40 to 125	-40 to 150	3.5	0.55	5.0	200	V <sub>R</sub> = 10 V, f = 1 MHz

# 5. Device Characteristics


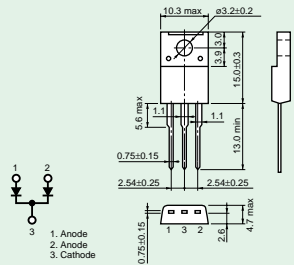

## Center-tap

PW-MINI	Package Appearance	Package Dimensions (mm)	Marking							
	 <p>Package Number ⑰</p>		<p>Typical</p>  <p>Part Number : Pad Print Lot Number : Laser Mark</p>							
	Maximum Ratings		Electrical Characteristics							
Part Number	$V_{RRM}$ (V)	$I_o$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.
<b>U1GWJ2C49</b>	40	1.0	15	-40 to 125	-40 to 150	0.5	0.55	0.5	25	$V_R = 10\text{ V}, f = 1\text{ MHz}$


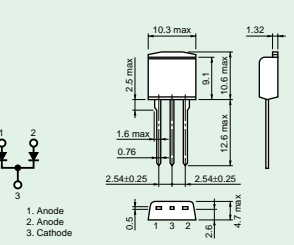

DP	Package Appearance	Package Dimensions (mm)	Marking							
	 <p>Package Number ⑳</p>		<p>Typical</p>  <p>Laser Mark</p>							
	Maximum Ratings		Electrical Characteristics							
Part Number	$V_{RRM}$ (V)	$I_o$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.
<b>U5FWK2C42</b>	30	5.0	50	-40 to 125	-40 to 125	0.3	0.4	2.5	145	$V_R = 10\text{ V}, f = 1\text{ MHz}$

Center-tap

TO-220NIS




Package Appearance		Package Dimensions (mm)					Marking				
 <p>Package Number ⑨</p>		 <p>1. Anode 2. Anode 3. Cathode</p>					<p>Typical</p>  <p>Laser Mark</p>				
Part Number	Maximum Ratings					Electrical Characteristics					
	$V_{RRM}$ (V)	$I_o$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.	
5FWJ2CZ47M	30	5.0	50	-40 to 125	-40 to 150	3.5	0.47	2.5	138	$V_R = 10V, f = 1MHz$	
5GWJ2CZ47C	40	5.0	50	-40 to 125	-40 to 150	3.5	0.55	2.5	100	$V_R = 10V, f = 1MHz$	
10FWJ2CZ47M	30	10	100	-40 to 125	-40 to 150	3.5	0.47	5.0	290	$V_R = 10V, f = 1MHz$	
10GWJ2CZ47C	40	10	100	-40 to 125	-40 to 150	3.5	0.55	5.0	195	$V_R = 10V, f = 1MHz$	
20FWJ2CZ47M	30	20	200	-40 to 125	-40 to 150	10	0.47	10	680	$V_R = 10V, f = 1MHz$	
30FWJ2CZ47M	30	30	300	-40 to 125	-40 to 150	15	0.47	15	820	$V_R = 10V, f = 1MHz$	
30GWJ2CZ47C	40	30	300	-40 to 125	-40 to 150	15	0.55	15	600	$V_R = 10V, f = 1MHz$	
30QWK2CZ47	120	30	250	-40 to 150	-40 to 150	0.05	0.85	15	227	$V_R = 10V, f = 1MHz$	


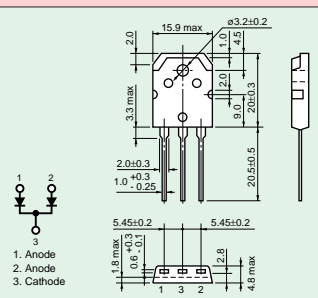

TO-220FL


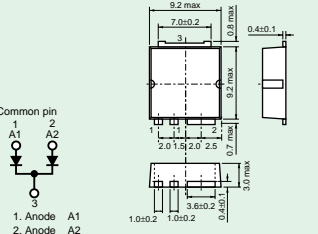

Package Appearance		Package Dimensions (mm)					Marking				
 <p>Package Number ⑦</p>		 <p>1. Anode 2. Anode 3. Cathode</p>					<p>Typical</p>  <p>Laser Mark</p>				
Part Number	Maximum Ratings					Electrical Characteristics					
	$V_{RRM}$ (V)	$I_{o(AV)}$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.	
5FWJ2C48M	30	5.0	50	-40 to 125	-40 to 150	3.5	0.47	2.5	138	$V_R = 10V, f = 1MHz$	
5GWJ2C48C	40	5.0	50	-40 to 125	-40 to 150	3.5	0.55	2.5	100	$V_R = 10V, f = 1MHz$	
10FWJ2C48M	30	10	100	-40 to 125	-40 to 150	3.5	0.47	5.0	290	$V_R = 10V, f = 1MHz$	
10GWJ2C48C	40	10	100	-40 to 125	-40 to 150	3.5	0.55	5.0	195	$V_R = 10V, f = 1MHz$	
20FWJ2C48M	30	20	200	-40 to 125	-40 to 150	10	0.47	10	680	$V_R = 10V, f = 1MHz$	
30FWJ2C48M	30	30	300	-40 to 125	-40 to 150	15	0.47	15	820	$V_R = 10V, f = 1MHz$	
30GWJ2C48C	40	30	300	-40 to 125	-40 to 150	15	0.55	15	600	$V_R = 10V, f = 1MHz$	
30QWK2C48	120	30	250	-40 to 150	-40 to 150	0.05	0.85	15	227	$V_R = 10V, f = 1MHz$	

# 5. Device Characteristics

## Center-tap

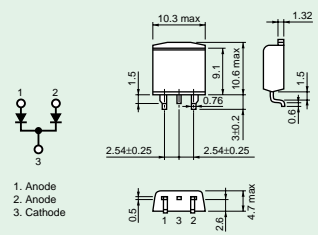TO-220SM	<b>Package Appearance</b>		<b>Package Dimensions (mm)</b>				<b>Marking</b>				
	 Package Number ⑰		 1. Anode 2. Anode 3. Cathode				Typical  Laser Mark				
Part Number	<b>Maximum Ratings</b>					<b>Electrical Characteristics</b>					
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.	
U5FWJ2C48M	30	5.0	50	-40 to 125	-40 to 150	3.5	0.47	2.5	138	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U5GWJ2C48C	40	5.0	50	-40 to 125	-40 to 150	3.5	0.55	2.5	100	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U10FWJ2C48M	30	10	100	-40 to 125	-40 to 150	3.5	0.47	5.0	290	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U10GWJ2C48C	40	10	100	-40 to 125	-40 to 150	3.5	0.55	5.0	195	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U20FWJ2C48M	30	20	200	-40 to 125	-40 to 150	10	0.47	10	680	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U30FWJ2C48M	30	30	300	-40 to 125	-40 to 150	15	0.47	15	820	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U30GWJ2C48C	40	30	300	-40 to 125	-40 to 150	15	0.55	15	600	$V_R = 10\text{ V}, f = 1\text{ MHz}$	

TO-3P(N)	<b>Package Appearance</b>		<b>Package Dimensions (mm)</b>				<b>Marking</b>				
	 Package Number ⑩		 1. Anode 2. Anode 3. Cathode				Typical  Color: White				
Part Number	<b>Maximum Ratings</b>					<b>Electrical Characteristics</b>					
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.	
30GWJ2C42C	40	30	300	-40 to 125	-40 to 150	15	0.55	15	600	$V_R = 10\text{ V}, f = 1\text{ MHz}$	

TFP	<b>Package Appearance</b>		<b>Package Dimensions (mm)</b>				<b>Marking</b>				
	 Package Number ⑳		 Common pin 1. Anode A1 2. Anode A2 3. Cathode K				Typical  Laser Mark				
Part Number	<b>Maximum Ratings</b>					<b>Electrical Characteristics</b>					
	$V_{RRM}$ (V)	$I_O$ (A)	$I_{FSM}$ (A)	$T_j$ (°C)	$T_{stg}$ (°C)	$I_{RRM}$ (mA)	$V_{FM}$ (V)	@ $I_{FM}$ (A)	$C_j$ (pF)(Typ.)	Cond.	
U30FWJ2C53M	30	30	300	-40 to 125	-40 to 150	15	0.47	15	880	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U30GWJ2C53C	40	30	300	-40 to 125	-40 to 150	15	0.55	15	660	$V_R = 10\text{ V}, f = 1\text{ MHz}$	
U30QWK2C53	120	30	100	-40 to 150	-40 to 150	0.05	0.85	15	230	$V_R = 10\text{ V}, f = 1\text{ MHz}$	


## 5.4 Power Zener Diodes

### U02Z300N Series (SMD)


#### Maximum Ratings (Ta = 25°C)

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	200	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C


#### Package Appearance

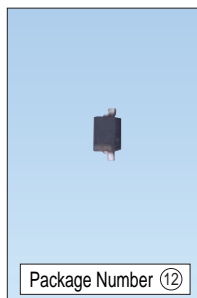

#### Package Dimensions (mm)

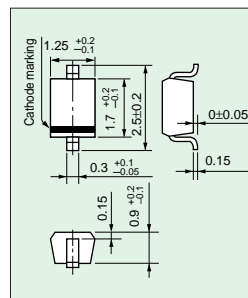

#### Marking

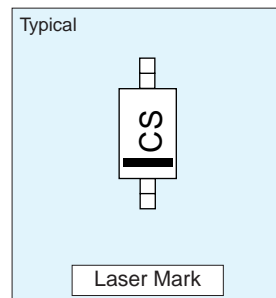

#### Electrical Characteristics (Ta = 25°C)

Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage αT (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (mA)	Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)	Marking
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max					
	Min	Typ.	Max					Max				
U02Z300N	270	300	330	10	0.1	240	400	1.2	10	1	240	CS
U02Z300N-L	270	280	290	10	0.1	220	360	1.2	10	1	240	CL
U02Z300N-X	280	290	300	10	0.1	230	370	1.2	10	1	240	CX
U02Z300N-Y	290	300	310	10	0.1	240	380	1.2	10	1	240	CY
U02Z300N-Z	300	310	320	10	0.1	250	390	1.2	10	1	240	CZ
U02Z300N-H	310	320	330	10	0.1	260	400	1.2	10	1	240	CH

# 5. Device Characteristics

## CRY62, CRZ10 Series (SMD)


### Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	700	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C


### Package Appearance



### Package Dimensions (mm)

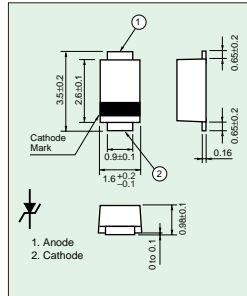

### Marking

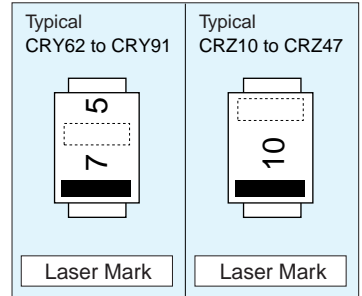

### Electrical Characteristics (T<sub>a</sub> = 25°C)


Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage $\alpha T$ (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (A)	Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max				
	Min	Typ.	Max					Max			
CRY62	5.6	6.2	6.8	60	10	2	3	1.0	0.2	10	3.0
CRY68	6.2	6.8	7.4	60	10	3	4	1.0	0.2	10	3.0
CRY75	6.8	7.5	8.3	30	10	4	5	1.0	0.2	10	4.5
CRY82	7.4	8.2	9.0	30	10	4	6	1.0	0.2	10	4.9
CRY91	8.2	9.1	10.0	30	10	5	8	1.0	0.2	10	5.5
CRZ10	9.0	10.0	11.0	30	10	6	9	1.0	0.2	10	6.0
CRZ11	9.9	11.0	12.1	30	10	7	11	1.0	0.2	10	7.0
CRZ12	10.8	12.0	13.2	30	10	8	13	1.0	0.2	10	8.0
CRZ13	11.7	13.0	14.3	30	10	9	14	1.0	0.2	10	9.0
CRZ15	13.5	15.0	16.5	30	10	11	17	1.0	0.2	10	10.0
CRZ16	14.4	16.0	17.6	30	10	12	19	1.0	0.2	10	11.0
CRZ18	16.2	18.0	19.8	30	10	14	23	1.0	0.2	10	13.0
CRZ20	18.0	20.0	22.0	30	10	16	26	1.0	0.2	10	14.0
CRZ22	19.8	22.0	24.2	30	10	18	28	1.0	0.2	10	16.0
CRZ24	21.6	24.0	26.4	30	10	20	32	1.0	0.2	10	17.0
CRZ27	24.3	27.0	29.7	30	10	23	36	1.0	0.2	10	19.0
CRZ30	27.0	30.0	33.0	30	10	25	40	1.0	0.2	10	21.0
CRZ33	29.7	33.0	36.3	30	10	26	41	1.0	0.2	10	26.4
CRZ36	32.4	36.0	39.6	30	9	28	45	1.0	0.2	10	28.8
CRZ39	35.1	39.0	42.9	35	8	30	48	1.0	0.2	10	31.2
CRZ43	38.7	43.0	47.3	40	7	33	53	1.0	0.2	10	34.4
CRZ47	42.3	47.0	51.7	65	6	38	60	1.0	0.2	10	37.6

# 1ZB6.8 Series


## Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	1.0	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C


### Package Appearance

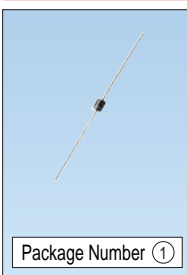

### Package Dimensions (mm)

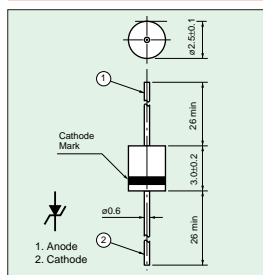

### Marking

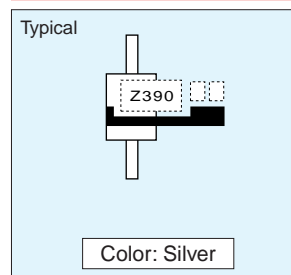

## Electrical Characteristics (Ta = 25°C)

Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage αT (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (A)	Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max				
	Min	Typ.	Max	Max							
1ZB6.8	6.2	6.8	7.4	60	10	3	4	1.2	0.2	10	3
1ZB7.5	6.8	7.5	8.3	30	10	4	5	1.2	0.2	10	4.5
1ZB8.2	7.4	8.2	9.1	30	10	4	6	1.2	0.2	10	4.9
1ZB9.1	8.2	9.1	10.1	30	10	5	8	1.2	0.2	10	5.5
1ZB10	9.0	10	11.0	30	10	6	9	1.2	0.2	10	6
1ZB11	9.9	11	12.1	30	10	7	11	1.2	0.2	10	7
1ZB12	10.8	12	13.2	30	10	8	13	1.2	0.2	10	8
1ZB13	11.7	13	14.3	30	10	9	14	1.2	0.2	10	9
1ZB15	13.5	15	16.5	30	10	11	17	1.2	0.2	10	10
1ZB16	14.4	16	17.6	30	10	12	19	1.2	0.2	10	11
1ZB18	16.2	18	19.8	30	10	14	23	1.2	0.2	10	13
1ZB20	18.0	20	22.0	30	10	16	26	1.2	0.2	10	14
1ZB22	19.8	22	24.2	30	10	18	28	1.2	0.2	10	16
1ZB24	21.6	24	26.4	30	10	20	30	1.2	0.2	10	17
1ZB27	24.3	27	29.7	30	10	23	36	1.2	0.2	10	19
1ZB30	27.0	30	33.0	30	10	25	40	1.2	0.2	10	21
1ZB33	29.7	33	36.3	30	10	26	41	1.2	0.2	10	26.4
1ZB36	32.4	36	39.6	30	9	28	45	1.2	0.2	10	28.8
1ZB43	38.7	43	47.3	40	7	33	53	1.2	0.2	10	34.4
1ZB47	42.3	47	51.7	65	6	38	60	1.2	0.2	10	37.6
1ZB51	45.9	51	56.1	65	6	43	68	1.2	0.2	10	40.8
1ZB68	61.2	68	74.8	120	4	57	90	1.2	0.2	10	54.4
1ZB75	67.5	75	82.5	150	4	66	104	1.2	0.2	10	60
1ZB82	73.8	82	90.2	170	3	71	113	1.2	0.2	10	65.4
1ZB100	90	100	110	300	3	87	138	1.2	0.2	10	80
1ZB110	99	110	121	300	3	96	152	1.2	0.2	10	88
1ZB150	135	150	165	450	2	136	212	1.2	0.2	10	120
1ZB180	162	180	198	500	1.5	161	255	1.2	0.2	10	144
1ZB200	180	200	220	500	1.5	170	269	1.2	0.2	10	160
1ZB200-Y	190	200	210			170	269				160
1ZB200-Z	200	210	220			178	286				168
1ZB220	198	220	242	5000	0.5	200	309	1.2	0.2	10	176
1ZB220-Y	210	220	230			200	309				176
1ZB220-Z	220	230	240			207	320				184
1ZB240	216	240	264	5000	0.5	215	343	1.2	0.2	10	192
1ZB240-Y	230	240	250			215	343				216
1ZB240-Z	240	250	260			225	338				225
1ZB270	243	270	297	5000	0.5	243	385	1.2	0.2	10	216
1ZB270-X	250	260	270			221	350				234
1ZB270-Y	260	270	280			228	362				243
1ZB270-Z	270	280	290			236	374				252
1ZB300	270	300	330	5000	0.5	270	428	1.2	0.2	10	240
1ZB300-X	280	290	300			244	388				261
1ZB300-Y	290	300	310			253	402				270
1ZB300-Z	300	310	320			261	415				279
1ZB330	297	330	363	5000	0.5	296	470	1.2	0.2	10	264
1ZB330-X	310	320	330			270	428				288
1ZB330-Y	320	330	340			278	441				297
1ZB330-Z	330	340	350			287	445				306
1ZB390	351	390	429	10000	0.5	350	555	1.2	0.2	10	312


# 5. Device Characteristics

## 1ZC12 Series / 1ZC12A Series


### Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	1.0	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C


### Package Appearance

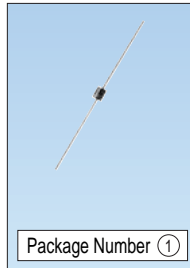

### Package Dimensions (mm)

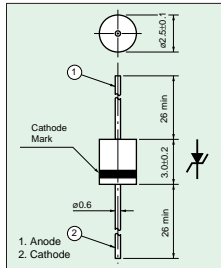

### Marking

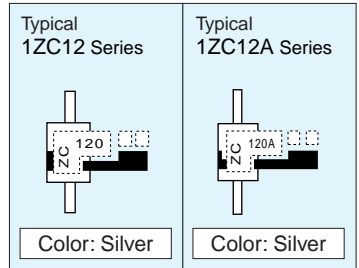

### Electrical Characteristics (Ta = 25°C)


Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage $\alpha_T$ (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (A)	Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max				
	Min	Typ.	Max					Max			
1ZC12	10.8	12	13.2	30	10	8	13	1.2	0.2	10	8.0
1ZC12A	11.4	12	12.6	30	10	8	13	1.2	0.2	10	8.0
1ZC13	11.7	13	14.3	30	10	9	14	1.2	0.2	10	9.0
1ZC13A	12.4	13	13.6	30	10	9	14	1.2	0.2	10	9.0
1ZC15	13.5	15	16.5	30	10	11	17	1.2	0.2	10	10.0
1ZC15A	14.3	15	15.8	30	10	11	17	1.2	0.2	10	10.0
1ZC16	14.4	16	17.6	30	10	12	19	1.2	0.2	10	11.0
1ZC16A	15.2	16	16.8	30	10	12	19	1.2	0.2	10	11.0
1ZC18	16.2	18	19.8	30	10	14	23	1.2	0.2	10	13.0
1ZC18A	17.1	18	18.9	30	10	14	23	1.2	0.2	10	13.0
1ZC20	18.0	20	22.0	30	10	16	26	1.2	0.2	10	14.0
1ZC20A	19.0	20	21.0	30	10	16	26	1.2	0.2	10	14.0
1ZC22	19.8	22	24.2	30	10	18	28	1.2	0.2	10	16.0
1ZC22A	20.9	22	23.1	30	10	18	28	1.2	0.2	10	16.0
1ZC24	21.6	24	26.4	30	10	20	32	1.2	0.2	10	17.0
1ZC24A	22.8	24	25.2	30	10	20	32	1.2	0.2	10	17.0
1ZC27	24.3	27	29.7	30	10	23	36	1.2	0.2	10	19.0
1ZC27A	25.7	27	28.3	30	10	23	36	1.2	0.2	10	19.0
1ZC30	27.0	30	33.0	30	10	25	40	1.2	0.2	10	21.0
1ZC30A	28.5	30	31.5	30	10	25	40	1.2	0.2	10	21.0
1ZC33	29.7	33	36.3	30	10	26	41	1.2	0.2	10	26.4
1ZC33A	31.4	33	34.6	30	10	26	41	1.2	0.2	10	26.4
1ZC36	32.4	36	39.6	30	9	28	45	1.2	0.2	10	28.8
1ZC36A	34.2	36	37.8	30	9	28	45	1.2	0.2	10	28.8
1ZC39	35.1	39	42.9	35	8	30	48	1.2	0.2	10	31.2
1ZC39A	37.1	39	40.9	35	8	30	48	1.2	0.2	10	31.2
1ZC43	38.7	43	47.3	40	7	33	53	1.2	0.2	10	34.4
1ZC43A	40.9	43	45.1	40	7	33	53	1.2	0.2	10	34.4
1ZC47	42.3	47	51.7	65	6	38	60	1.2	0.2	10	37.6
1ZC47A	44.7	47	49.3	65	6	38	60	1.2	0.2	10	37.6
1ZC51	45.9	51	56.1	65	6	43	68	1.2	0.2	10	40.8
1ZC51A	48.5	51	53.5	65	6	43	68	1.2	0.2	10	40.8
1ZC56	50.4	56	61.6	85	5	48	77	1.2	0.2	10	44.8
1ZC56A	53.2	56	58.8	85	5	48	77	1.2	0.2	10	44.8
1ZC62	55.8	62	68.2	105	5	53	85	1.2	0.2	10	49.6
1ZC62A	58.9	62	65.1	105	5	53	85	1.2	0.2	10	49.6
1ZC68	61.2	68	74.8	120	4	57	90	1.2	0.2	10	54.4
1ZC68A	64.6	68	71.4	120	4	57	90	1.2	0.2	10	54.4
1ZC75	67.5	75	82.5	150	4	66	104	1.2	0.2	10	60
1ZC75A	71.3	75	78.7	150	4	66	104	1.2	0.2	10	60
1ZC82	73.8	82	90.2	170	3	71	113	1.2	0.2	10	65.4
1ZC82A	77.9	82	86.1	170	3	71	113	1.2	0.2	10	65.4
1ZC91	81.9	91	100.1	240	3	79	127	1.2	0.2	10	72.8
1ZC91A	86.5	91	95.5	240	3	79	127	1.2	0.2	10	72.8
1ZC100	90.0	100	110.0	300	3	87	138	1.2	0.2	10	80
1ZC100A	95.0	100	105.0	300	3	87	138	1.2	0.2	10	80
1ZC110	99.0	110	121.0	300	3	96	152	1.2	0.2	10	88
1ZC110A	104.5	110	115.5	300	3	96	152	1.2	0.2	10	88
1ZC120	108.0	120	132.0	350	2.5	106	170	1.2	0.2	10	96
1ZC120A	114.0	120	126.0	350	2.5	106	171	1.2	0.2	10	96

# U1ZB6.8 Series (SMD)


## Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	1.0	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C

Package Appearance




Package Dimensions (mm)

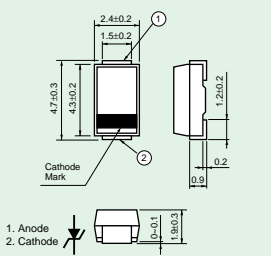

1. Anode  
2. Cathode

Marking

Typical



Laser Mark

## Electrical Characteristics (Ta = 25°C)

Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage αT (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (A)	Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max				
	Min	Typ.	Max	Max							
U1ZB6.8	6.2	6.8	7.4	60	10	3	4	1.2	0.2	10	3
U1ZB7.5	6.8	7.5	8.3	30	10	4	5	1.2	0.2	10	4.5
U1ZB8.2	7.4	8.2	9.1	30	10	4	6	1.2	0.2	10	4.9
U1ZB9.1	8.2	9.1	10.1	30	10	5	8	1.2	0.2	10	5.5
U1ZB10	9.0	10	11.0	30	10	6	9	1.2	0.2	10	6
U1ZB11	9.9	11	12.1	30	10	7	11	1.2	0.2	10	7
U1ZB12	10.8	12	13.2	30	10	8	13	1.2	0.2	10	8
U1ZB13	11.7	13	14.3	30	10	9	14	1.2	0.2	10	9
U1ZB15	13.5	15	16.5	30	10	11	17	1.2	0.2	10	10
U1ZB16	14.4	16	17.6	30	10	12	19	1.2	0.2	10	11
U1ZB18	16.2	18	19.8	30	10	14	23	1.2	0.2	10	13
U1ZB20	18.0	20	22.0	30	10	16	26	1.2	0.2	10	14
U1ZB22	19.8	22	24.2	30	10	18	28	1.2	0.2	10	16
U1ZB24	21.6	24	26.4	30	10	20	30	1.2	0.2	10	17
U1ZB27	24.3	27	29.7	30	10	23	36	1.2	0.2	10	19
U1ZB30	27.0	30	33.0	30	10	25	40	1.2	0.2	10	21
U1ZB33	29.7	33	36.3	30	10	26	41	1.2	0.2	10	26.4
U1ZB36	32.4	36	39.6	30	9	28	45	1.2	0.2	10	28.8
U1ZB43	38.7	43	47.3	40	7	33	53	1.2	0.2	10	34.4
U1ZB47	42.3	47	51.7	65	6	38	60	1.2	0.2	10	37.6
U1ZB51	45.9	51	56.1	65	6	43	68	1.2	0.2	10	40.8
U1ZB68	61.2	68	74.8	120	4	57	90	1.2	0.2	10	54.4
U1ZB75	67.5	75	82.5	150	4	66	104	1.2	0.2	10	60
U1ZB82	73.8	82	90.2	170	3	71	113	1.2	0.2	10	65.4
U1ZB100	90	100	110	300	3	87	138	1.2	0.2	10	80
U1ZB110	99	110	121	300	3	96	152	1.2	0.2	10	88
U1ZB150	135	150	165	450	2	136	212	1.2	0.2	10	120
U1ZB180	162	180	198	500	1.5	161	255	1.2	0.2	10	44
U1ZB200	180	200	220	500	1.5	170	269	1.2	0.2	10	160
U1ZB200-Y	190	200	210			170	269				160
U1ZB200-Z	200	210	220			178	286				68
U1ZB220	198	220	242	5000	0.5	200	309	1.2	0.2	10	176
U1ZB220-Y	210	220	230			200	309				176
U1ZB220-Z	220	230	240			207	320				184
U1ZB240	216	240	264	5000	0.5	215	343	1.2	0.2	10	192
U1ZB240-Y	230	240	250			215	343				216
U1ZB240-Z	240	250	260			225	338				225
U1ZB270	243	270	297	5000	0.5	243	385	1.2	0.2	10	216
U1ZB270-X	250	260	270			221	350				234
U1ZB270-Y	260	270	280			228	362				243
U1ZB270-Z	270	280	290	5000	0.5	236	374	1.2	0.2	10	252
U1ZB300	270	300	330			270	428				240
U1ZB300-X	280	290	300			244	388				261
U1ZB300-Y	290	300	310	5000	0.5	253	402	1.2	0.2	10	270
U1ZB300-Z	300	310	320			261	415				279
U1ZB330	297	330	363			296	470				264
U1ZB330-X	310	320	330	5000	0.5	270	428	1.2	0.2	10	288
U1ZB330-Y	320	330	340			278	441				297
U1ZB330-Z	330	340	350			287	445				306
U1ZB390	351	390	429	10000	0.5	350	555	1.2	0.2	10	312


# 5. Device Characteristics

## 1Z6.2, 1Z6.8A Series


### Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	1.0	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C


### Package Appearance

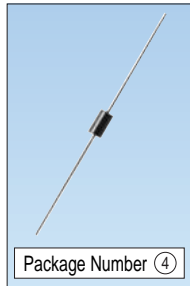

### Package Dimensions (mm)

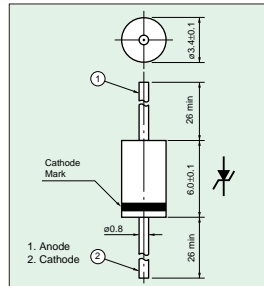

### Marking

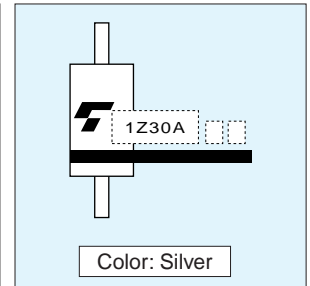

### Electrical Characteristics (T<sub>a</sub> = 25°C)


Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage $\alpha T$ (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (A)	Reverse Current I <sub>R</sub> ( $\mu$ A)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> ( $\Omega$ )	Measurement current I <sub>Z</sub> (mA)	Typ.	Max				
	Min	Typ.	Max					Max			
1Z6.2	5.6	6.2	6.8	60	10	1.5	2	1.2	0.2	10	2
1Z6.8	6.2	6.8	7.4	60	10	3	4	1.2	0.2	10	3
1Z6.8A	6.45	6.8	7.14								
1Z7.5	6.8	7.5	8.3	30	10	4	5	1.2	0.2	10	4.5
1Z7.5A	7.13	7.5	7.87								
1Z8.2	7.4	8.2	9.1	30	10	4	6	1.2	0.2	10	4.9
1Z8.2A	7.79	8.2	8.61								
1Z9.1	8.2	9.1	10.1	30	10	5	8	1.2	0.2	10	5.5
1Z9.1A	8.65	9.1	9.55								
1Z10	9.0	10	11.0	30	10	6	9	1.2	0.2	10	6
1Z10A	9.5	10	10.5								
1Z11	9.9	11	12.1	30	10	7	11	1.2	0.2	10	7
1Z11A	10.5	11	11.5								
1Z12	10.8	12	13.2	30	10	8	13	1.2	0.2	10	8
1Z12A	11.4	12	12.6								
1Z13	11.7	13	14.3	30	10	9	14	1.2	0.2	10	9
1Z13A	12.4	13	13.6								
1Z15	13.5	15	16.5	30	10	11	17	1.2	0.2	10	10
1Z15A	14.3	15	15.8								
1Z16	14.4	16	17.6	30	10	12	19	1.2	0.2	10	11
1Z16A	15.2	16	16.8								
1Z18	16.2	18	19.8	30	10	14	23	1.2	0.2	10	13
1Z18A	17.1	18	18.9								
1Z20	18.0	20	22.0	30	10	16	26	1.2	0.2	10	14
1Z20A	19.0	20	21.0								
1Z22	19.8	22	24.2	30	10	18	28	1.2	0.2	10	16
1Z22A	20.9	22	23.1								
1Z24	21.6	24	26.4	30	10	20	32	1.2	0.2	10	17
1Z24A	22.8	24	25.2								
1Z27	24.3	27	29.7	30	10	23	36	1.2	0.2	10	19
1Z27A	25.7	27	28.3								
1Z30	27.0	30	33.0	30	10	25	40	1.2	0.2	10	21
1Z30A	28.5	30	31.5								
1Z33	29.7	33	36.3	30	10	26	41	1.2	0.2	10	26.4
1Z36	32.4	36	39.6	30	9	28	45	1.2	0.2	10	28.8
1Z43	38.7	43	47.3	40	7	33	53	1.2	0.2	10	34.4
1Z47	42.3	47	51.7	65	6	38	60	1.2	0.2	10	37.6
1Z51	45.9	51	56.1	65	6	43	68	1.2	0.2	10	40.8
1Z68	61.2	68	74.8	120	4	57	90	1.2	0.2	10	54.4
1Z75	67.5	75	82.5	150	4	66	104	1.2	0.2	10	60
1Z82	73.8	82	90.2	170	3	71	113	1.2	0.2	10	65.4
1Z100	90	100	110	300	3	87	138	1.2	0.2	10	80
1Z110	99	110	121	300	3	96	152	1.2	0.2	10	88
1Z150	135	150	165	450	2	136	212	1.2	0.2	10	120
1Z180	162	180	198	500	1.5	161	255	1.2	0.2	10	144
1Z330	297	330	363	5000	1.0	297	472	1.2	0.2	10	264
1Z390	351	390	429	10000	0.5	350	555	1.2	0.2	10	312

## 2Z12, 2Z16A Series


### Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	1.5	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C


### Package Appearance

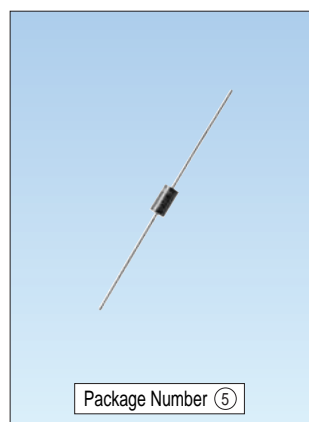

### Package Dimensions (mm)

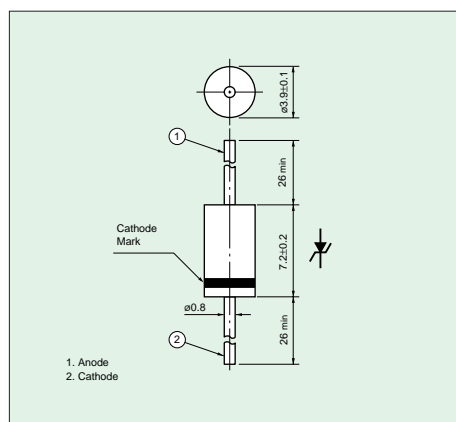

### Marking

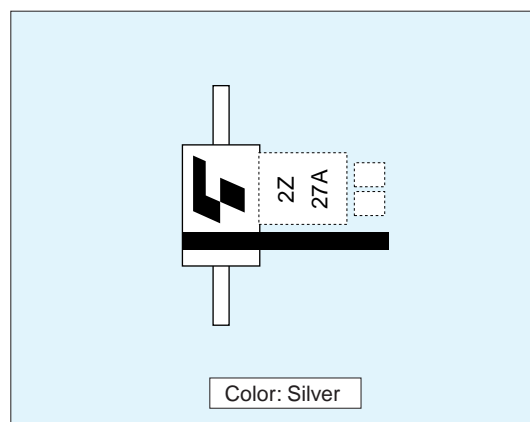

### Electrical Characteristics (Ta = 25°C)

Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage $\alpha T$ (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (A)	Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max				
	Min	Typ.	Max	Typ.							
<b>2Z12</b>	10.8	12	13.2	30	10	8	13	1.2	0.2	5	10.2
<b>2Z13</b>	1.7	13	14.3	30	10	9	14	1.2	0.2	5	11.1
<b>2Z15</b>	13.5	15	16.5	30	10	11	17	1.2	0.2	5	12.8
<b>2Z16</b>	14.4	16	17.6	30	10	12	19	1.2	0.2	5	13.6
* <b>2Z16A</b>	15.2	16	16.8	30	10	12	19	1.2	0.2	5	13.6
<b>2Z18</b>	16.2	18	19.8	30	10	14	23	1.2	0.2	5	15.3
* <b>2Z18A</b>	17.1	18	18.9	30	10	14	23	1.2	0.2	5	15.3
<b>2Z20</b>	18.0	20	22.0	30	10	16	26	1.2	0.2	5	17.1
<b>2Z22</b>	19.8	22	24.2	30	10	18	28	1.2	0.2	5	18.8
<b>2Z24</b>	21.6	24	26.4	30	10	20	32	1.2	0.2	5	20.5
<b>2Z27</b>	24.3	27	29.7	30	10	23	36	1.2	0.2	5	23.1
* <b>2Z27A</b>	25.7	27	28.3	30	10	23	36	1.2	0.2	5	23.1
<b>2Z30</b>	27.0	30	33.0	30	10	25	40	1.2	0.2	5	25.6
<b>2Z33</b>	29.7	33	36.3	30	10	26	41	1.2	0.2	5	28.2
<b>2Z36</b>	32.4	36	39.6	30	9	28	45	1.2	0.2	5	30.8
<b>2Z47</b>	42.3	47	51.7	65	6	38	60	1.2	0.2	5	40.2
<b>2Z51</b>	45.9	51	56.1	65	6	43	68	1.2	0.2	5	43.6

\*: This product is manufactured to order only.

# 5. Device Characteristics

## CMZ12 Series (SMD)


### Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	2	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C


### Package Appearance



### Package Dimensions (mm)

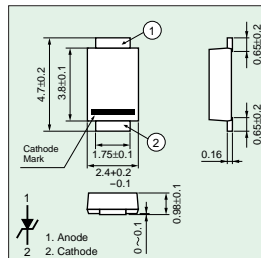

### Marking

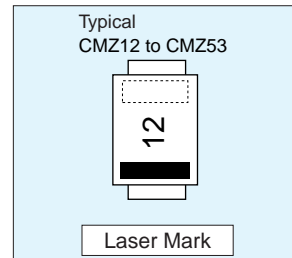

### Electrical Characteristics (T<sub>a</sub> = 25°C)

Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage αT (mV/°C)		Forward Voltage V <sub>F</sub> (V)	Measurement Current I <sub>F</sub> (A)	Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max				
	Min	Typ.	Max					Max			
CMZ12	10.8	12	13.2	30	10	-	13	1.2	0.2	10	8
CMZ13	11.7	13	14.3	30	10	-	14	1.2	0.2	10	9
CMZ15	13.5	15	16.5	30	10	-	17	1.2	0.2	10	10
CMZ16	14.4	16	17.6	30	10	-	19	1.2	0.2	10	11
CMZ18	16.2	18	19.8	30	10	-	23	1.2	0.2	10	13
CMZ20	18.0	20	22.0	30	10	-	26	1.2	0.2	10	14
CMZ22	19.8	22	24.2	30	10	-	28	1.2	0.2	10	16
CMZ24	21.6	24	26.4	30	10	-	32	1.2	0.2	10	17
CMZ27	24.3	27	29.7	30	10	-	36	1.2	0.2	10	19
CMZ30	27.0	30	33.0	30	10	-	40	1.2	0.2	10	21
CMZ33	29.7	33	36.3	30	10	-	41	1.2	0.2	10	26.4
CMZ36	32.4	36	39.6	30	9	-	45	1.2	0.2	10	28.8
CMZ39	35.1	39	42.9	35	8	-	48	1.2	0.2	10	31.2
CMZ43	38.7	43	47.3	40	7	-	53	1.2	0.2	10	34.4
CMZ47	42.3	47	51.7	65	6	-	60	1.2	0.2	10	37.6
CMZ51	45.9	51	56.1	65	6	-	68	1.2	0.2	10	40.8
CMZ53	47.7	53	58.3	85	5	-	77	1.2	0.2	10	42.4

## CMZM16 Series (SMD) Bi-directional Zener Diodes


### Maximum Ratings

Characteristic	Symbol	Rating	Unit
Power Dissipation	P	1.0	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C


### Package Appearance



### Package Dimensions (mm)

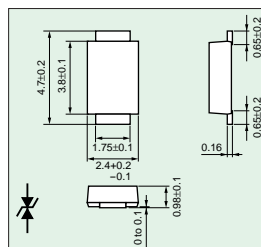

### Marking

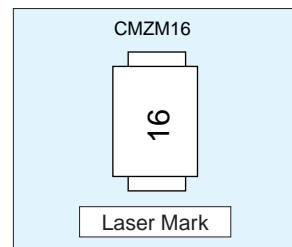

### Electrical Characteristics (T<sub>a</sub> = 25°C)

Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage αT (mV/°C)		Reverse Current I <sub>R</sub> (μA)	Measurement voltage V <sub>R</sub> (V)
	Zener voltage V <sub>Z</sub> (V)			Zener impedance r <sub>d</sub> (Ω)	Measurement current I <sub>Z</sub> (mA)	Typ.	Max		
	Min	Typ.	Max					Max	
CMZM16	14.4	16	17.6	30	10	-	19	10	11

## U5ZA27(Z), U5ZA27C, U5ZA40C, U5ZA48C, U5ZA53C(SMD) Series

### Maximum Ratings


Characteristic	Symbol	Rating	Unit
Power Dissipation (Note1)	P	5.0	W
Non-Repetitive Peak Reverse Surge Current (see Figure 2.)	$I_{RSM}$	<b>U5ZA27(Z)</b>	A
		<b>U5ZA27C</b>	
		<b>U5ZA40C</b>	
		<b>U5ZA48C</b>	
		<b>U5ZA53C</b>	
Junction Temperature	$T_j$	150	°C
Storage Temperature	$T_{stg}$	-40 to 150	°C

Note 1:  $T_L = 25^\circ\text{C}$


### Package Appearance



### Package Dimensions (mm)

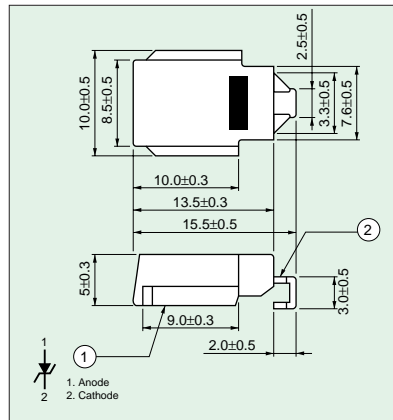


### Marking

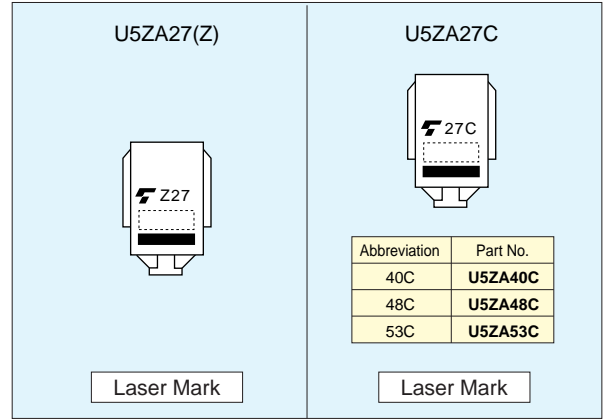

### Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )









Part Number	Zener Characteristics					Temperature Coefficient of Zener Voltage $\alpha T$ (mV/°C)		Forward Voltage $V_F$ (V)	Measurement Current $I_F$ (A)	Reverse Current $I_R$ ( $\mu\text{A}$ )	Measurement voltage $V_R$ (V)
	Zener voltage $V_Z$ (V)			Zener impedance $r_d$ ( $\Omega$ )	Measurement current $I_Z$ (mA)	Typ.	Max				
	Min	Typ.	Max	Max					Max		
<b>U5ZA27(Z)</b>	24	27	30	30	10	23	36	1.2	6	10	22
<b>U5ZA27C</b>	24	27	30	30	10	23	36	1.2	6	10	22
<b>U5ZA40C</b>	36	40	44	30	10	31	49	1.2	6	10	32
<b>U5ZA48C</b>	43.2	48	52.8	65	10	39	62	1.2	6	10	38.4
<b>U5ZA53C</b>	47.7	53	58.3	65	10	45	70	1.2	6	10	42.4

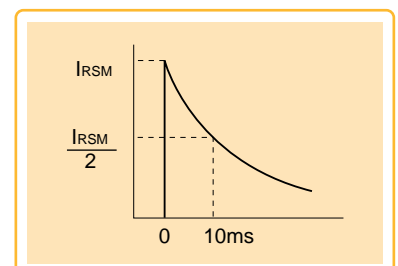

# 6. Tape Packing Specifications

Unit: mm

Tape Type	Tape Dimensions	Packing Quantity (pcs/box)					Packing Method
		DO-41SS	DO-41S	DO-41	DO-15	DO-15L	
TPA1		—	5000	5000	2500	—	
TPA2		—	3000	3000	1500	1000	
TPA2		3000	—	—	—	—	

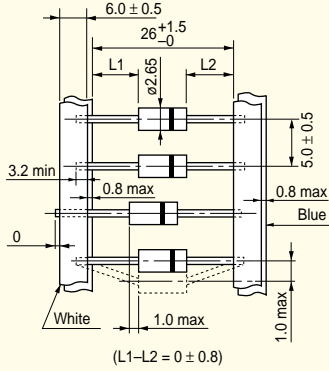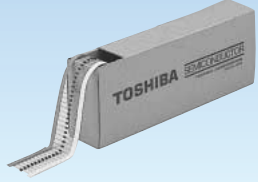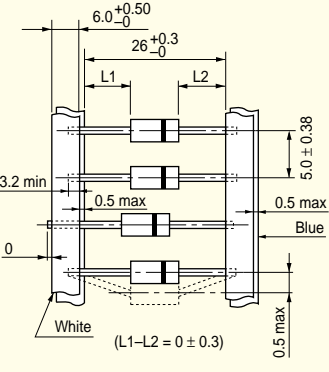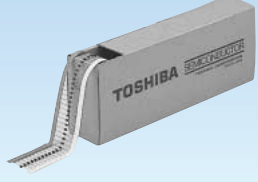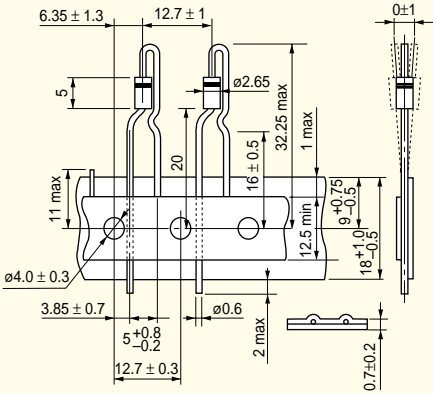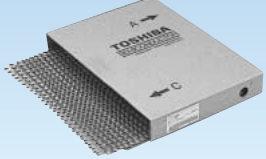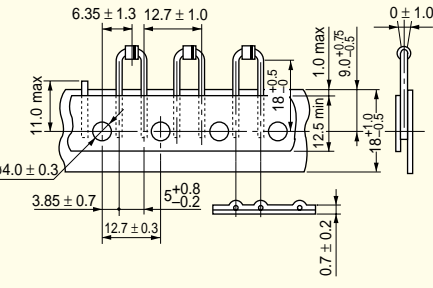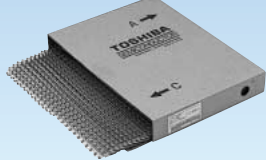Tape Type	Tape Dimensions	Packing Quantity (pcs/box)					Packing Method
		DO-41SS	DO-41S	DO-41	DO-15	DO-15L	
TPA3	 <p>(L1-L2 = 0 ± 0.8)</p>	—	3000	3000	—	—	
	 <p>(L1-L2 = 0 ± 0.3)</p>	3000	—	—	—	—	
TPB2		—	4000	—	—	—	
TPB5		4000	—	—	—	—	

# 6. Tape Packing Specifications

Unit: mm

Tape Type	Tape Dimensions	Packing Quantity (pcs/box)	Packing Method
TPH3		<b>USC</b>  3000 pcs/reel (5 reel/box) (10 reel/box)	
TE85□ R or L		<b>US-FLAT™</b>  4000 pcs/reel (5 reel/box) (10 reel/box)	
TE85□ R or L		<b>S-FLAT™</b>  3000 pcs/reel (5 reel/box)	
TE24 R or L		<b>TFP</b>  1500 pcs/reel (1 reel/box)	
TE24 R or L		<b>MR</b>  750 pcs/reel (1 reel/box)	
TE12 R or L		<b>M-FLAT™</b>  3000 pcs/reel (5 reel/box) (10 reel/box)	

Unit: mm

Tape Type	Tape Dimensions	Packing Quantity (pcs/box)	Packing Method
TE12 R or L		<b>I-FLAT™</b>	
TE12-2□ R or L		<b>I-FLAT™</b>	
TE12□ R or L		<b>PW-MINI</b>	
TE16□ R1 or L1		<b>DP</b>	
TE24□ R or L		<b>TO-220SM</b>	
TE85□ R or L		<b>VS-8</b>	

# 7. Tapes Available for Different Product Series


Product Type and Part Number		Tape Type	TPA1	TPA2	TPA3	TPB2	TPB5	TE12□ R or L	TE12□-2 R or L	TE24□ R or L	TE16□ R or L	TE85 R or L	TPH3
General-Purpose Rectifiers	CRG01 Series		-	-	-	-	-	-	-	-	-	○	-
	CMC01 Series		-	-	-	-	-	○	-	-	-	-	-
	CMG02 Series		-	-	-	-	-	○	-	-	-	-	-
	S5688B Series		-	○	○	-	○	-	-	-	-	-	-
	S5566B Series		○	○	○	○	-	-	-	-	-	-	-
	1S1885 Series		○	○	-	-	-	-	-	-	-	-	-
	1S1830 Series		○	○	-	-	-	-	-	-	-	-	-
	U1BC44 Series		-	-	-	-	-	○	○	-	-	-	-
	1S1885A Series		○	○	-	-	-	-	-	-	-	-	-
	1R5BZ41 Series		○	○	-	-	-	-	-	-	-	-	-
Fast Recovery Diodes	TFR4N Series		-	○	○	-	○	-	-	-	-	-	-
	TFR3N Series		○	○	○	○	-	-	-	-	-	-	-
	TVR5B Series		-	○	○	-	○	-	-	-	-	-	-
	S5295B Series		○	○	-	-	-	-	-	-	-	-	-
	TVR1B Series		○	○	-	-	-	-	-	-	-	-	-
	TFR2N Series		○	○	-	-	-	-	-	-	-	-	-
	TFR1N Series		○	○	-	-	-	-	-	-	-	-	-
	TVR2B Series		○	○	-	-	-	-	-	-	-	-	-
	U05GH44 Series		-	-	-	-	-	○	○	-	-	-	-
	1NH42 Series		-	○	○	-	○	-	-	-	-	-	-
	1NH41 Series		○	○	○	○	-	-	-	-	-	-	-
	1S1834 Series		○	○	-	-	-	-	-	-	-	-	-
	TVR4J Series		○	○	-	-	-	-	-	-	-	-	-
Very-Fast Recovery Diodes	05NU42/1GU42 Series		-	○	○	○	-	-	-	-	-	-	-
	05NU41/1JU41 Series		○	○	○	○	-	-	-	-	-	-	-
	0R8GU41 Series		○	○	-	-	-	-	-	-	-	-	-
	1NU41 Series		○	○	-	-	-	-	-	-	-	-	-
	1R5GU41 Series		○	○	-	-	-	-	-	-	-	-	-
	U05NU44/U1GU44 Series		-	-	-	-	-	○	○	-	-	-	-
High-Efficiency Diodes	CRH01 Series		-	-	-	-	-	-	-	-	-	○	-
	CMH01 Series		-	-	-	-	-	○	-	-	-	-	-
	U1DL49 Series		-	-	-	-	-	○	-	-	-	-	-
	1DL42A Series		-	○	○	-	○	-	-	-	-	-	-
	1DL41A Series		○	○	○	○	-	-	-	-	-	-	-
	1R5DL41A Series		○	○	-	-	-	-	-	-	-	-	-
	U5DL2C48A Series		-	-	-	-	-	-	-	○	-	-	-
	U10DL2C48A Series		-	-	-	-	-	-	-	○	-	-	-
U20DL2C48A Series		-	-	-	-	-	-	-	○	-	-	-	
U20DL2C53A Series		-	-	-	-	-	-	-	○	-	-	-	
Schottky Barrier Diodes	CUS01 Series		-	-	-	-	-	-	-	-	-	○	-
	CRS01 Series		-	-	-	-	-	-	-	-	-	○	-
	CMS01 Series		-	-	-	-	-	○	-	-	-	-	-
	TPCF8E02 Series		-	-	-	-	-	-	-	-	-	○	-
	U1GWJ44 Series		-	-	-	-	-	○	○	-	-	-	-
	U1GWJ49 Series		-	-	-	-	-	○	-	-	-	-	-
	1GWJ43 Series		-	○	○	-	○	-	-	-	-	-	-
	1GWJ42 Series		○	○	○	○	-	-	-	-	-	-	-
	2GWJ42 Series		○	○	-	-	-	-	-	-	-	-	-
	U5FWK2C42 Series		-	-	-	-	-	-	-	-	○	-	-
	U5GWJ2C48 Series		-	-	-	-	-	-	-	○	-	-	-
	U10GWJ2C48 Series		-	-	-	-	-	-	-	○	-	-	-
	U30GWJ2C48 Series		-	-	-	-	-	-	-	○	-	-	-
U30FWJ2C53M Series		-	-	-	-	-	-	-	○	-	-	-	
Power Zener Diodes	1Z6.2 Series		○	○	-	-	-	-	-	-	-	-	-
	1ZB6.8 Series		-	○	○	-	○	-	-	-	-	-	-
	U1ZB12 Series		-	-	-	-	-	○	○	-	-	-	-
	2Z12 Series		○	○	-	-	-	-	-	-	-	-	-
	U02Z300N Series		-	-	-	-	-	-	-	-	-	-	○
	CRY62/CRZ10 Series		-	-	-	-	-	-	-	-	-	○	-
	CMZM16 Series		-	-	-	-	-	○	-	-	-	-	-
	CMZ12 Series		-	-	-	-	-	○	-	-	-	-	-
U5ZA27 Series		-	-	-	-	-	-	-	○	-	-	-	

# 8. Lead Formed Products

The following lead formed products have different specifications.  
Please contact the nearest Toshiba sales office for these products.


## DO-41

Unit: mm

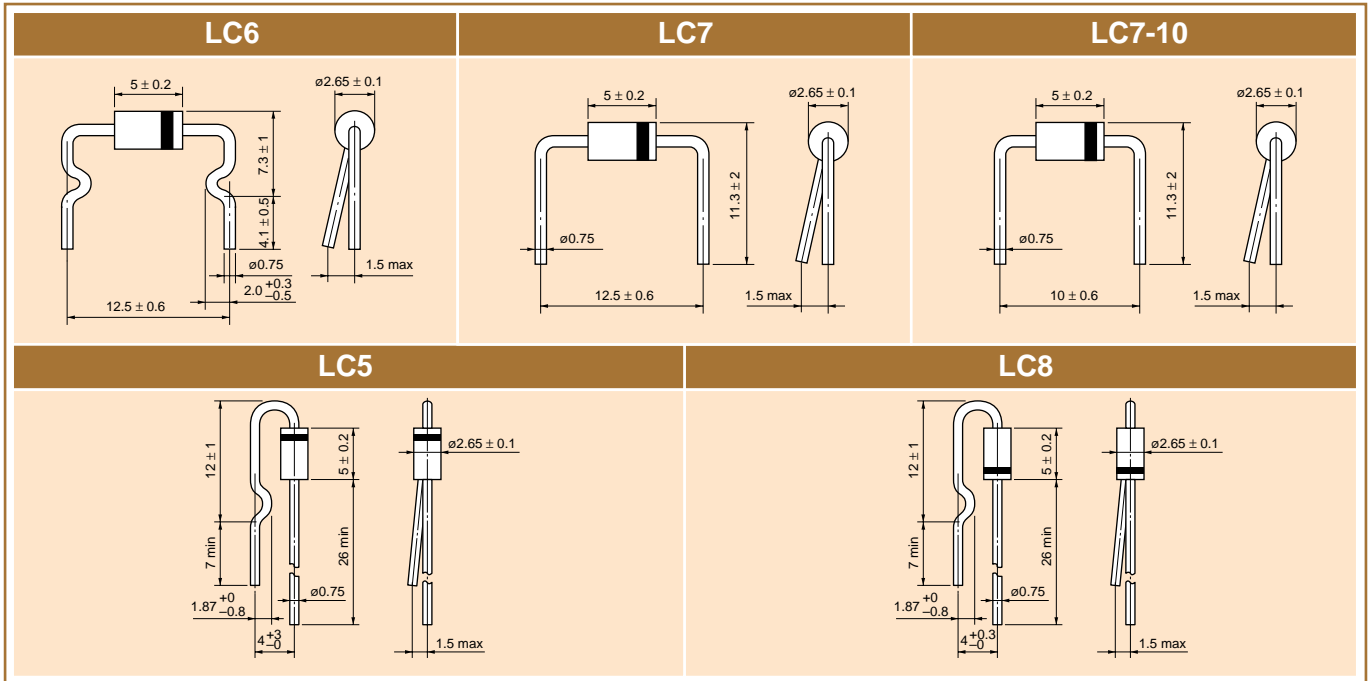


## DO-15

Unit: mm

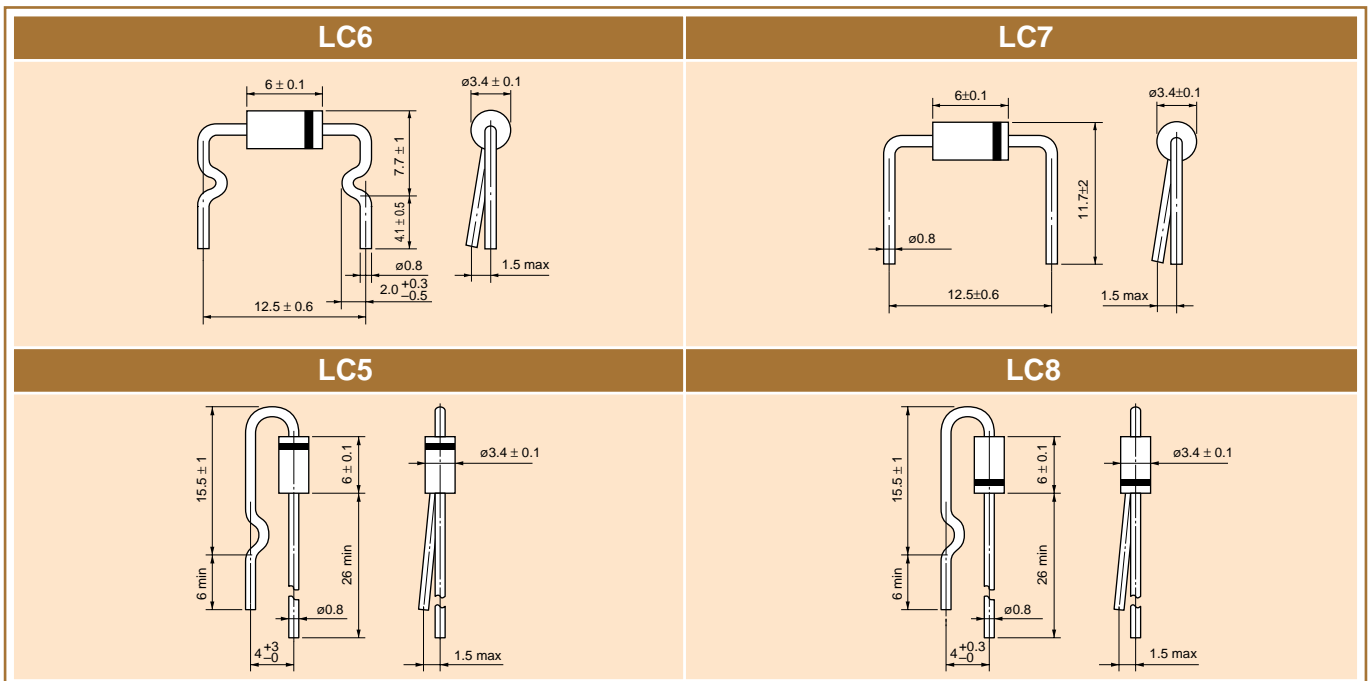


## DO-15L

Unit: mm

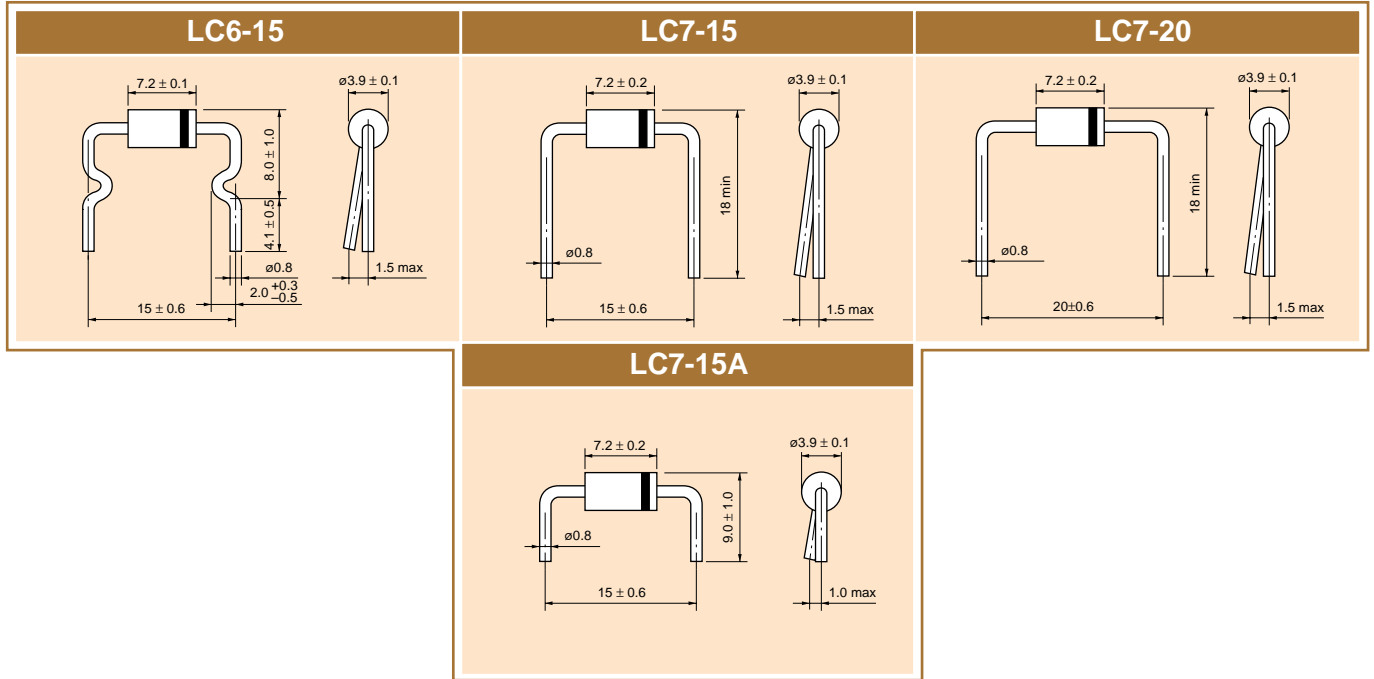










## TO-220NIS

Unit: mm

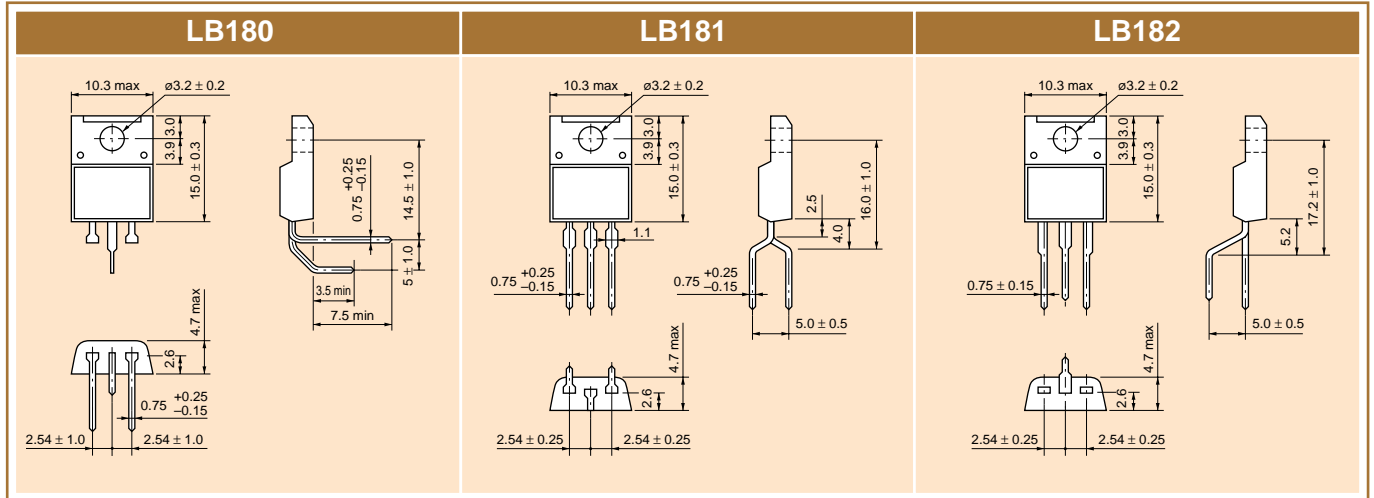










# 9. Package Dimensions

Unit: mm

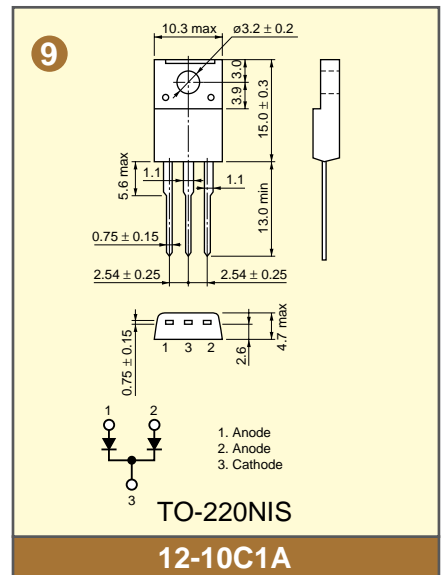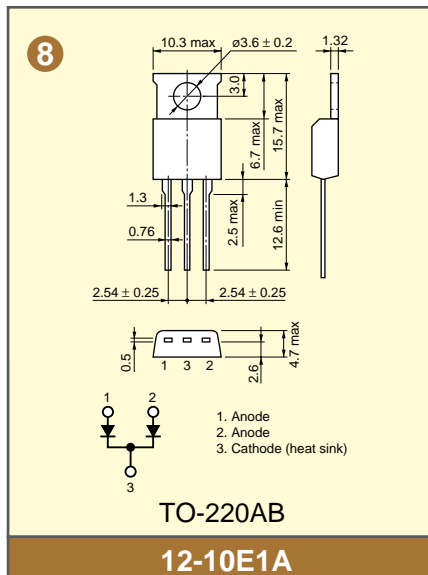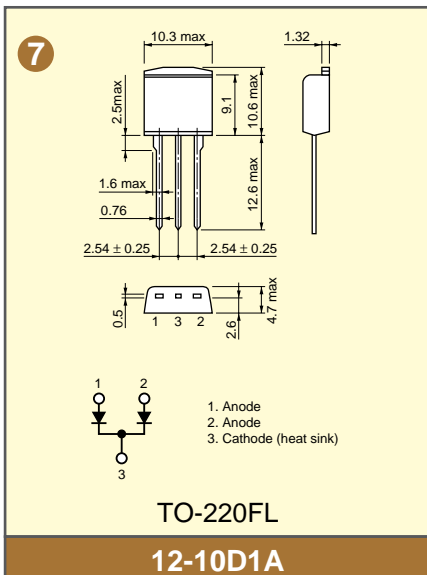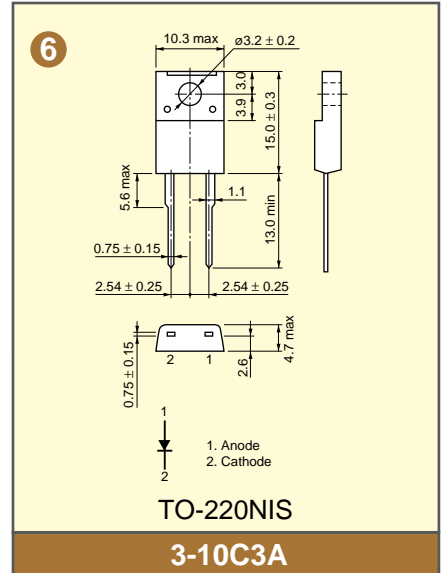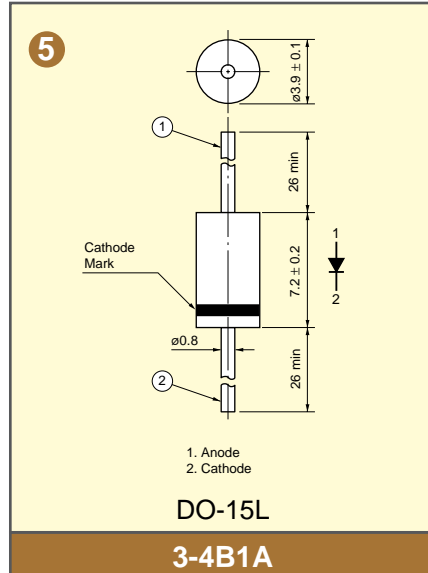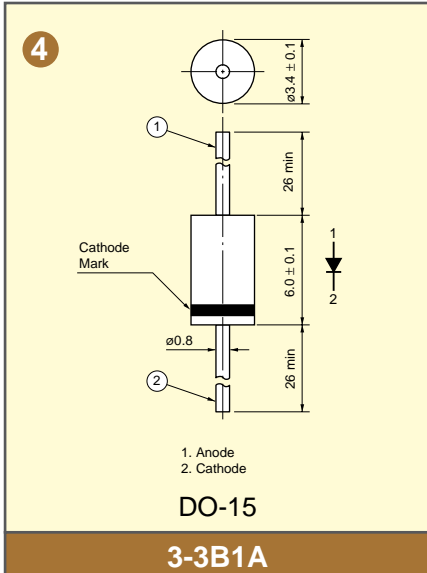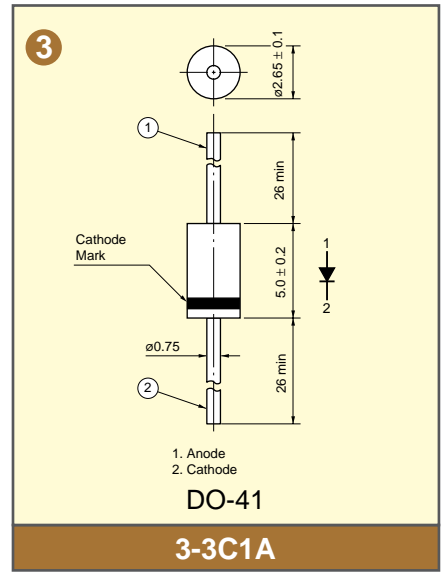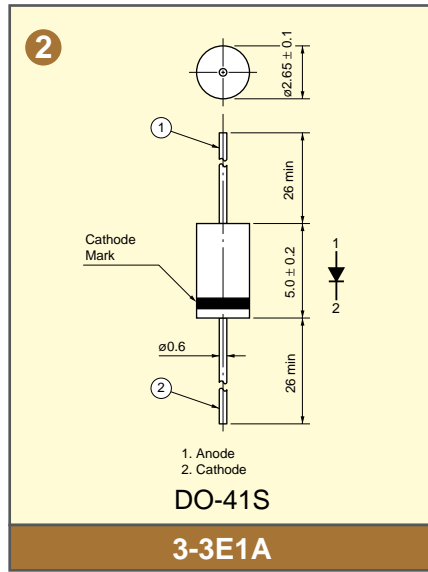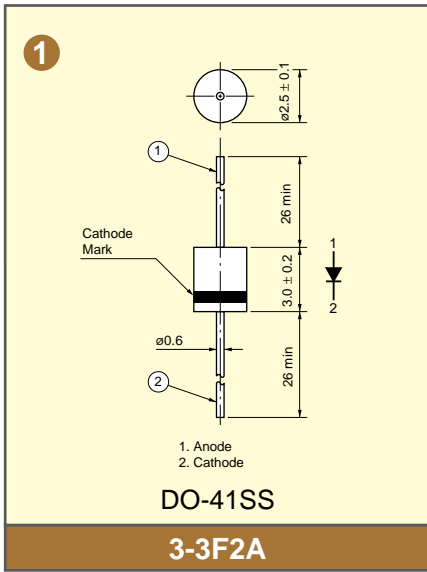



# 9. Package Dimensions

Unit: mm

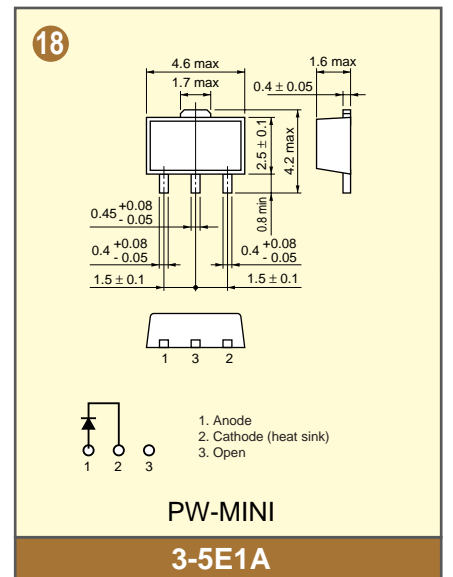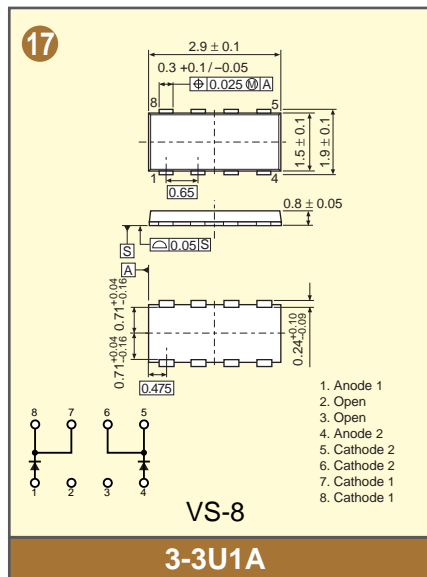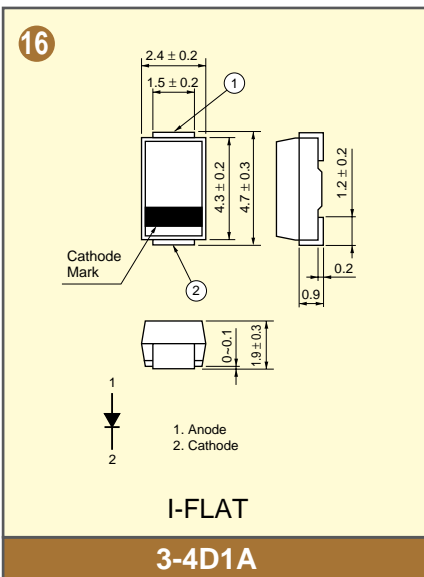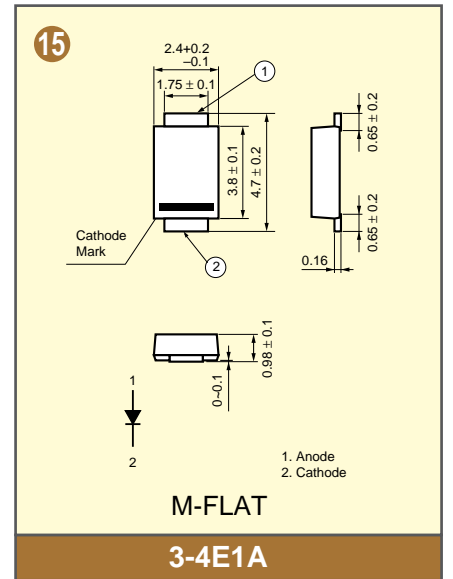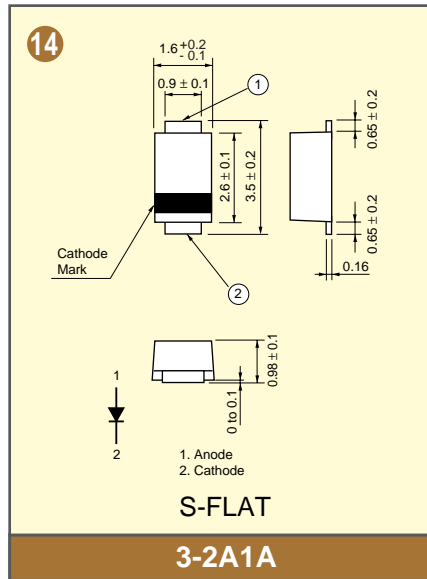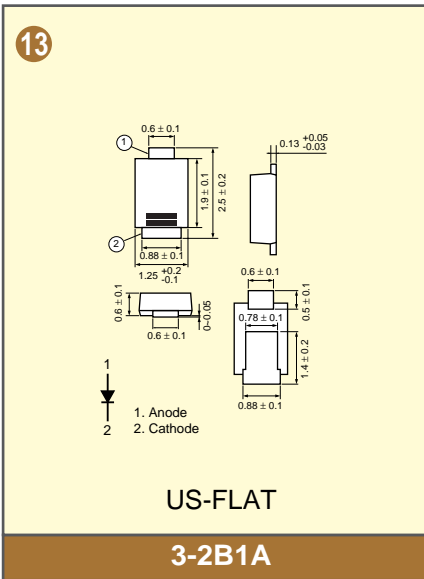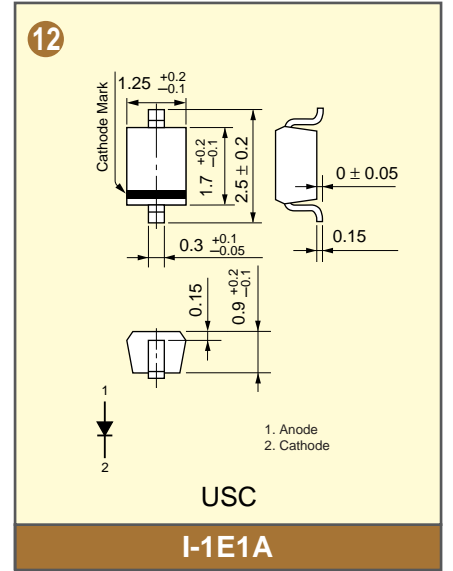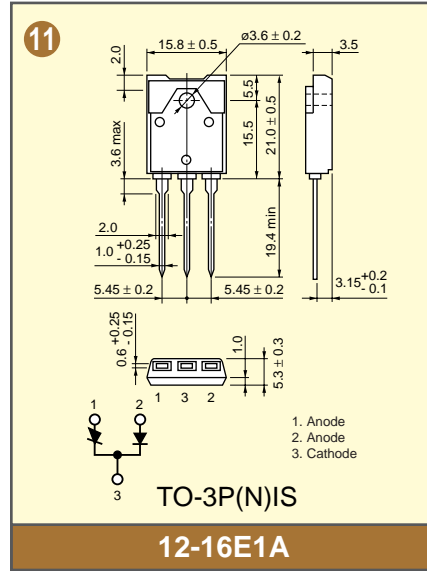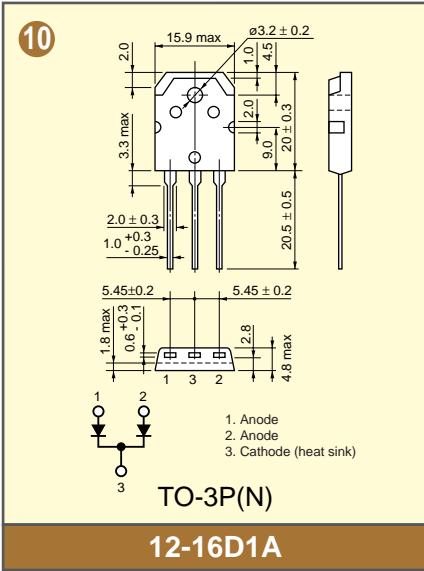

Unit: mm



19

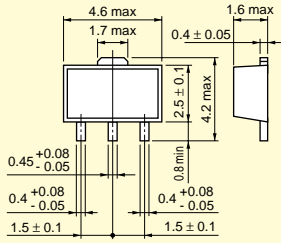

PW-MINI

12-5B1A



20

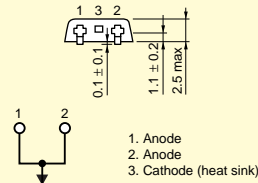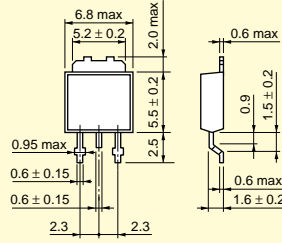

DP

12-7B2A



21

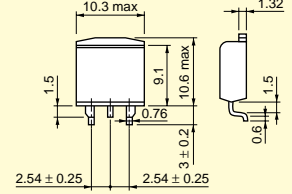

TO-220SM

12-10D2A



22

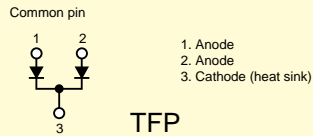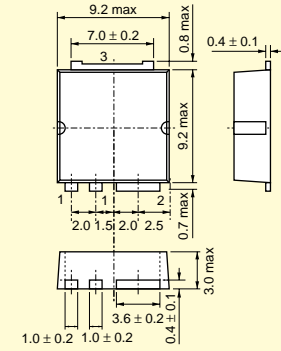

TFP

12-9B1A

23

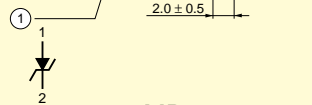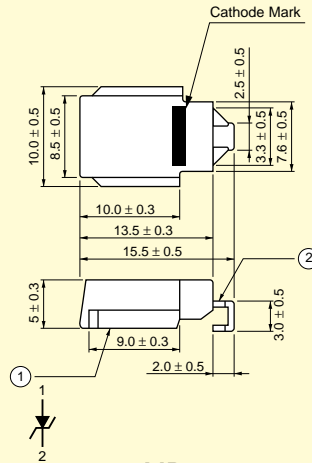

MR

3-11J2A

**Toshiba America  
Electronic Components, Inc.**

**Headquarters-Irvine, CA**  
9775 Toledo Way, Irvine, CA 92618, U.S.A.  
Tel: (949)455-2000 Fax: (949)859-3963

**Boulder, CO (Denver)**  
3100 Arapahoe #500,  
Boulder, CO 80303, U.S.A.  
Tel: (303)442-3801 Fax: (303)442-7216

**Deerfield, IL (Chicago)**  
One Pkwy., North, #500, Deerfield,  
IL 60015-2547, U.S.A.  
Tel: (847)945-1500 Fax: (847)945-1044

**Duluth, GA (Atlanta)**  
3700 Crestwood Pkwy, #160,  
Duluth, GA 30096, U.S.A.  
Tel: (770)931-3363 Fax: (770)931-7602

**Edison, NJ**  
2035 Lincoln Hwy, #3000, Edison,  
NJ 08817, U.S.A.  
Tel: (732)248-8070 Fax: (732)248-8030

**Beaverton/Portland, OR**  
8323 SW Cirrus Drive, Beaverton,  
OR 97008, U.S.A.  
Tel: (503)466-3721 Fax: (503)629-0827

**Raleigh, NC**  
3120 Highwoods Blvd., #108, Raleigh,  
NC 27604, U.S.A.  
Tel: (919)859-2800 Fax: (919)859-2898

**Richardson, TX (Dallas)**  
777 East Campbell Rd., #650, Richardson,  
TX 75081, U.S.A.  
Tel: (972)480-0470 Fax: (972)235-4114

**San Jose Engineering Center, CA**  
1060 Rincon Circle, San Jose, CA 95131, U.S.A.  
Tel: (408)526-2400 Fax: (408)526-8910

**Wakefield, MA (Boston)**  
599 North Ave. #8, Wakefield, MA, U.S.A.  
Tel: (781)246-5076 Fax: (781)246-8502

**Toshiba do Brasil, S.A.**

**Electronics Component Div.**  
Rua Afonso Celso, 55213 andar,  
Vila Mariana, CEP 04119-002, São Paulo, Brasil  
Tel: (011)5576-6619 Fax: (011)5576-6607

**Toshiba India Private Ltd.**  
6F DR, Gopal Das Bhawan 28,  
Barakhamba Road, New Delhi, 110001, India  
Tel: (011)2371-4601 Fax: (011)2371-4603

**Toshiba Electronics Europe GmbH**

**Düsseldorf Head Office**  
Hansaallee 181, D-40549 Düsseldorf,  
Germany  
Tel: (0211)5296-0 Fax: (0211)5296-400

**München Office**  
Büro München Hofmannstrasse 52,  
D-81379, München, Germany  
Tel: (089)748595-0 Fax: (089)748595-42

**Toshiba Electronics France S.A.R.L.**  
Les Jardins du Golf 6 rue de Rome 93561,  
Rosny-Sous-Bois, Cedex, France  
Tel: (1)48-12-48-12 Fax: (1)48-94-51-15

**Toshiba Electronics Italiana S.R.L.**  
Centro Direzionale Colleoni,  
Palazzo Perseo 3,  
I-20041 Agrate Brianza, (Milan), Italy  
Tel: (039)68701 Fax: (039)6870205

**Toshiba Electronics España, S.A.**  
Parque Empresarial, San Fernando, Edificio Europa,  
1ª Planta, E-28831 Madrid, Spain  
Tel: (91)660-6798 Fax: (91)660-6799

**Toshiba Electronics (UK) Ltd.**  
Riverside Way, Camberley Surrey,  
GU15 3YA, U.K.  
Tel: (01276)69-4600 Fax: (01276)69-4800

**Toshiba Electronics Scandinavia A.B.**  
Gustavslundsvägen 18, 5th Floor,  
S-167 15 Bromma, Sweden  
Tel: (08)704-0900 Fax: (08)80-8459

**Toshiba Electronics Asia  
(Singapore) Pte. Ltd.**

**Singapore Head Office**  
438B Alexandra Road, #06-08/12 Alexandra  
Technopark, Singapore 119968  
Tel: (6278)5252 Fax: (6271)5155

**Toshiba Electronics Service  
(Thailand) Co., Ltd.**  
135 Moo 5, Bangkadi Industrial Park, Tivanon Road,  
Pathumthani, 12000, Thailand  
Tel: (02)501-1635 Fax: (02)501-1638

**Toshiba Electronics Trading  
(Malaysia) Sdn. Bhd.**

**Kuala Lumpur Head Office**  
Suite W1203, Wisma Consplant, No.2,  
Jalan SS 16/4, Subang Jaya, 47500 Petaling Jaya,  
Selangor Darul Ehsan, Malaysia  
Tel: (03)5631-6311 Fax: (03)5631-6307

**Penang Office**  
Suite 13-1, 13th Floor, Menara Penang Garden,  
42-A, Jalan Sultan Ahmad Shah,  
10050 Penang, Malaysia  
Tel: (04)226-8523 Fax: (04)226-8515

**Toshiba Electronics Philippines, Inc.**  
26th Floor, Citibank Tower, Valero Street, Makati,  
Manila, Philippines  
Tel: (02)750-5510 Fax: (02)750-5511

**Toshiba Electronics Asia, Ltd.**

**Hong Kong Head Office**  
Level 11, Tower 2, Grand Century  
Place, No.193, Prince Edward Road West,  
Mongkok, Kowloon, Hong Kong  
Tel: 2375-6111 Fax: 2375-0969

**Beijing Office**  
Room 714, Beijing Fortune Building,  
No.5 Dong San Huan Bei-Lu, Chao Yang District,  
Beijing, 100004, China  
Tel: (010)6590-8796 Fax: (010)6590-8791

**Chengdu Office**  
Suite 403A, Holiday Inn Crown Plaza 31, Zongfu Street,  
Chengdu, 610016, Sichuan, China  
Tel: (028)675-1773 Fax: (028)675-1065

**Qingdao Office**  
Room B707, Full Hope Plaza,  
12 Hong Kong Central Road, Qingdao,  
Shandong, 266071, China  
Tel: (0532)502-8105 Fax: (0532)502-8109

**Toshiba Electronics Shenzhen Co., Ltd.**  
Room 2601-2609, 2616, Office Tower Shun Hing Square,  
Di Wang Commercial Center, 5002 Shennan Road East,  
Shenzhen, 518008, China  
Tel: (0755)2583-0827 Fax: (0755)8246-1581

**Toshiba Electronics Korea Corporation**

**Seoul Head Office**  
891, Sejong Securities Bldg. 20F, Daechi-dong,  
Gangnam-gu, Seoul, 135-738, Korea  
Tel: (02)3484-4334 Fax: (02)3484-4302

**Gumi Office**  
6F, Goodmorning Securities Building,  
56 Songjung-dong, Gumi-shi,  
Kyeongbuk, 730-090, Korea  
Tel: (054)456-7613 Fax: (054)456-7617

**Toshiba Electronics (Shanghai) Co., Ltd.**  
11F, HSBC Tower, 101  
Yin Cheng East Road, Pudong New Area, Shanghai,  
200120, China  
Tel: (021)6841-0666 Fax: (021)6841-5002

**Hangzhou Office**  
9F Zhejiang San Rui Bldg. No. 36 QingChun Road,  
Hangzhou 310004, China  
Tel: (0571)8704-0255 Fax: (0571)8704-0200

**Tsurong Xiamen Xiangyu Trading Co., Ltd.**  
8N, Xiamen SEZ Bonded Goods Market Building,  
Xiamen, Fujian, 361006, China  
Tel: (0592)562-3798 Fax: (0592)562-3799

**Toshiba Electronics Taiwan Corporation**

**Taipei Head Office**  
17F, Union Enterprise Plaza Building, 109  
Min Sheng East Road, Section 3, Taipei,  
105, Taiwan  
Tel: (02)2514-9988 Fax: (02)2514-7892

**Kaohsiung Office**  
16F-A, Chung-Cheng Building, 2, Chung-Cheng 3Road,  
Kaohsiung, 800, Taiwan  
Tel: (07)237-0826 Fax: (07)236-0046

The information contained herein is subject to change without notice. 021023\_D

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. 021023\_C

TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023\_A

The Toshiba products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These Toshiba products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of Toshiba products listed in this document shall be made at the customer's own risk. 021023\_B

TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations. 030519\_Q

**TOSHIBA****TOSHIBA CORPORATION**  
Semiconductor CompanyWebsite: <http://www.semicon.toshiba.co.jp/eng>

© 2004 TOSHIBA CORPORATION

Previous edition: BCE0001A  
2004-03(0.5k)PC-O  
Printed in Japan