


## FM STEREO MULTIPLEX DECODER

The KA2264 is a monolithic integrated circuit consisting of a phase locked loop FM stereo demodulator. It is designed for use in 3V radio cassette recorders.

## FEATURES

- Low voltage operation:  $V_{CC} = 1.8V \sim 5V$ .
- Excellent space-factor: 9 SIP/16 SOP.
- Minimum number of external parts required.
- Easy monitoring of VCO free running frequency is available at Pin 6.
- High pilot sensitivity:  $V_{L(ON)} = 9mV$  (Typ).
- Lamp drive current: max lamp current = 8mA.
- VCO stop and stereo lamp turn-off are simultaneously operated by connecting Pin 7 to  $V_{CC}$ .

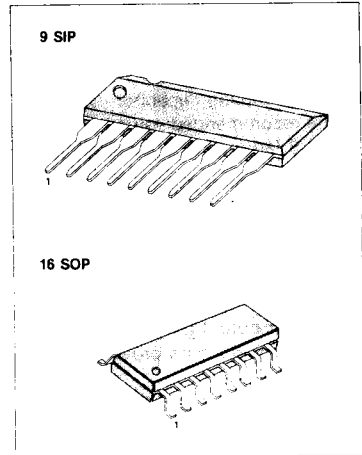

## ORDERING INFORMATION

Device	Package	Operating Temperature
KA2264	9 SIP	- 20 °C ~ + 70 °C
KA2264D	16 SOP	

## BLOCK DIAGRAM

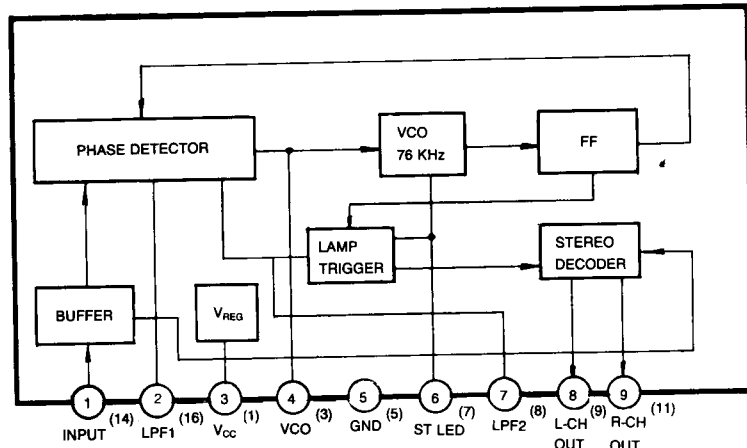


Fig. 1

( ) : KA2264D

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Characteristic		Symbol	Value	Unit
Supply Voltage		$V_{CC}$	6	V
Lamp Voltage		$V_{LAMP}$	8	V
Lamp Current		$I_{LAMP}$	8	mA
Power Dissipation	KA2264	$P_D$	500	mW
	KA2264D		350	
Operating Temperature		$T_{OPR}$	-20 ~ +70	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-40 ~ +125	$^\circ\text{C}$

\* Derated above  $T_a = 25^\circ\text{C}$  in the proportion of  $4\text{mW}/^\circ\text{C}$  (KA2264D:  $2.8\text{mW}/^\circ\text{C}$ )

## ELECTRICAL CHARACTERISTICS

( $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 3\text{V}$ ,  $f = 1\text{KHz}$ , unless otherwise specified)

Characteristic		Symbol	Test Conditions	Min	Typ	Max	Unit
Circuit Current		$I_{CCQ}$	$V_i = 0$		4.5	8.0	mA
Maximum Input Voltage		$V_{i(MAX)}$ Stereo	$L + R = 90\%$ , $P = 10\%$ $f = 1\text{KHz}$ , $\text{THD} = 5\%$		400		mV
Channel Separation		CS	$L + R = 180\text{mV}$ $P = 20\text{mV}$	$f = 100\text{Hz}$	35		dB
				$f = 1\text{KHz}$	30	35	
				$f = 10\text{KHz}$		35	
Total Harmonic Distortion	Mono	THD 1	$V_i = 200\text{mV}$		0.4	1.0	%
	Stereo	THD 2	$L + R = 180\text{mV}$ , $P = 20\text{mV}$		0.5		
Voltage Gain		$G_V$	$V_i = 200\text{mV}$	-6.5	-5.0	-3.5	dB
Channel Balance		CB	$V_i = 200\text{mV}$		0	1.5	dB
Signal to Noise Ratio		S/N	$V_i = 200\text{mV}$ $R_G = 620\Omega$		82		dB
Lamp Level	ON	$V_{L(ON)}$	Pilot only		9	15	mV
	OFF	$V_{L(OFF)}$		2	6		
Lamp Hysteresis		HY			3		mV
Capture Range		CR	$P = 20\text{mV}$		$\pm 3$		%
Carrier Leakage	19KHz	$V_{LKG}$	$P = 20\text{mV}$ $L + R = 180\text{mV}$		32		dB
	38KHz				60		

TEST CIRCUIT 1

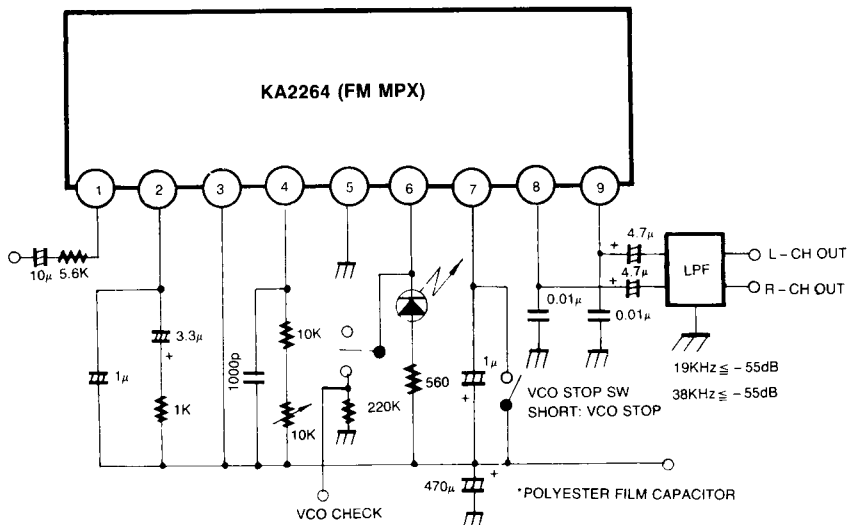


Fig. 2

TEST CIRCUIT 2

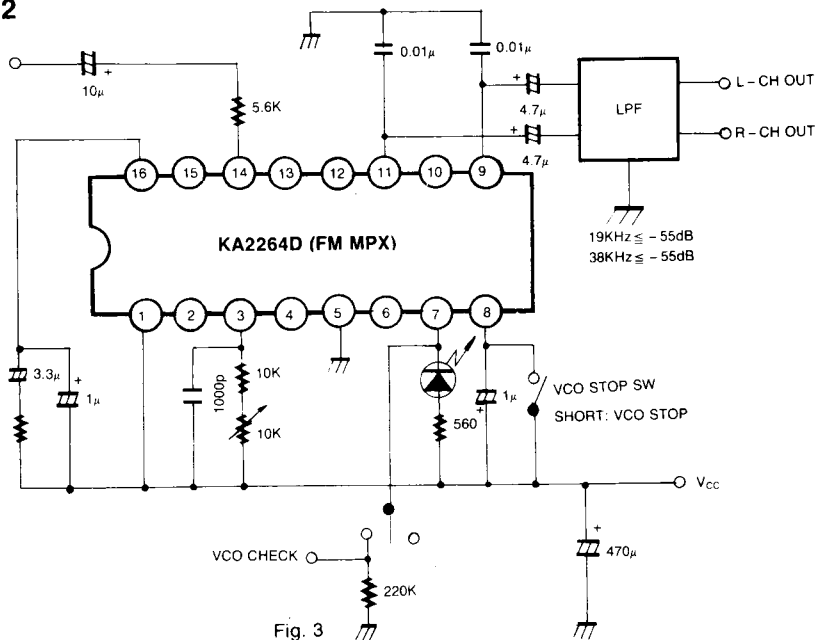


Fig. 3



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.