

GD54/74HC133, GD54/74HCT133


13-INPUT NAND GATE

General Description

These devices are identical in pinout to the 54/74LS133. They contain a single 13-input NAND gate. These devices are characterized for operation over wide temperature ranges to meet industry and military specifications.

Features

- Low Power consumption characteristic of CMOS devices
- Output drive capability: 10 LS TTL Loads Min.
- Operating speed superior to LS TTL
- Wide operating voltage range: for HC 2 to 6 volts
for HCT 4.5 to 5.5 volts
- Low input current: 1 μ A Max.
- Low quiescent current: 20 μ A Max. (74HC)
- High noise immunity characteristic of CMOS
- Diode protection on all inputs

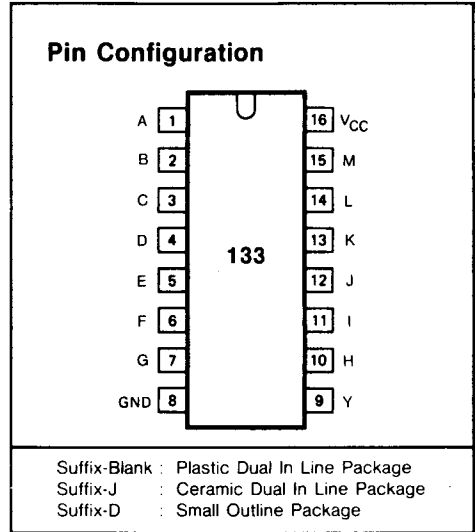

Logic Diagram

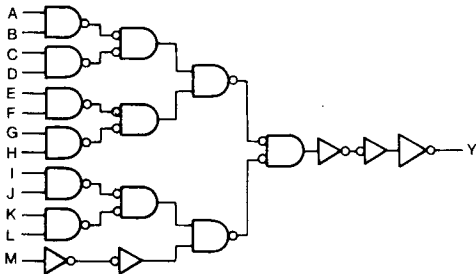


Fig. 1 Logic diagram

Function Table

INPUTS A THRU M	OUTPUT Y
All inputs H	L
one or more inputs L	H

Absolute Maximum Ratings

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CC}	DC Supply voltage		-0.5	+7	V
I_{IK}, I_{OK}	DC input or output diode current	for $V_I < -0.5$ or $V_I > V_{CC} + 0.5V$		20	mA
I_O	DC output source or sink current	for $-0.5V < V_O < V_{CC} + 0.5V$		25	mA
I_{CC}	DC V_{CC} or GND current			50	mA
T_{stg}	Storage temperature range		-65	150	°C
P_D	Power dissipation per package	above +70°C: derate linearly with 8mW/K		500	mW
T_L	Lead temperature	At distance 1/16 ± 1/32 in. from case for 60 sec(CERAMIC) 10 sec(PLASTIC)		300 260	°C

Recommended Operating Conditions

CHARACTERISTIC	LIMITS		UNITS
	MIN.	MAX.	
Supply-Voltage Range V_{CC} : GD54/74HC Types	2	6	V
GD54/74HCT Types	4.5	5.5	
DC Input or Output Voltage V_I, V_O	0	V_{CC}	V
Operating Temperature T_A : GD74 Types	-40	+85	°C
GD54 Types	-55	+125	
Input Rise and Fall times t_r, t_f : GD54/74HC Types at 2V		1000	ns
at 4.5V		500	
at 6V		400	
GD54/74HCT Types at 4.5V		500	

DC Electrical Characteristics for HC

SYMBOL	PARAMETER	TEST CONDITION	V _{CC} (V)	T _A =25°C			GD74HC133		GD54HC133		UNIT	
				MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.		
V _{IH}	HIGH level input Voltage		2.0	1.5			1.5		1.5		V	
			4.5	3.15			3.15		3.15			
			6.0	4.2			4.2		4.2			
V _{IL}	LOW level input voltage		2.0			0.3		0.3		0.3	V	
			4.5			0.9		0.9		0.9		
			6.0			1.2		1.2		1.2		
V _{OH}	HIGH level output voltage	V _{IN} =V _{IH}	I _{OH} =-20μA	2.0	1.9	2.0		1.9		1.9	V	
				4.5	4.4	4.5		4.4		4.4		
		or V _{IL}	I _{OH} =-4mA	4.5	3.98	4.3		3.84		3.7		
				6.0	5.48	5.2		5.34		5.2		
V _{OL}	LOW level output voltage	V _{IN} =V _{IH}	I _{OL} =20μA	2.0			0.1		0.1		V	
				4.5			0.1		0.1			0.1
		or V _{IL}	I _{OL} =4mA	4.5		0.17	0.26		0.33			0.4
				6.0		0.15	0.26		0.33			0.4
I _{IH}	Input leakage Current	V _{IN} =V _{CC} or GND	6.0			0.1		1.0		1.0	μA	
I _{CC}	Quiescent Supply Current	V _{IN} =V _{CC} or GND I _{out} =0μA	6.0			2		20		40	μA	

DC Electrical Characteristics for HCT

SYMBOL	PARAMETER	TEST CONDITION	V _{CC} (V)	T _A =25°C			GD74HCT133		GD54HCT133		UNIT		
				MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.			
V _{IH}	HIGH level input Voltage		4.5 to 5.5	2.0			2.0		2.0		V		
			V _{IL}	LOW level input voltage	4.5 to 5.5			0.8		0.8			V
												0.8	
V _{OH}	HIGH level output voltage	V _{IN} =V _{IH}	I _{OH} =-20μA	4.5	4.4	4.5		4.4		4.4	V		
				4.5	3.98	4.3		3.84		3.7			
		or V _{IL}	I _{OH} =-4mA	4.5			0.1		0.1			0.1	
				4.5		0.17	0.26		0.33			0.4	
V _{OL}	LOW level output voltage	V _{IN} =V _{IH}	I _{OL} =20μA	4.5			0.1		0.1		V		
				4.5			0.1		0.1			0.1	
		or V _{IL}	I _{OL} =4mA	4.5		0.17	0.26		0.33			0.4	
				4.5		0.15	0.26		0.33			0.4	
I _{IH}	Input leakage Current	V _{IN} =V _{CC} or GND	5.5			0.1		1.0		1.0	μA		
I _{CC}	Quiescent Supply Current	V _{IN} =V _{CC} or GND I _{out} =0μA	5.5			2		20		40	μA		

AC Characteristics for HC: $t_r=t_f=6ns$ $C_L=50pF$

SYMBOL	PARAMETER	V _{CC} (V)	T _A =25°C			GD74HC133		GD54HC133		UNIT
			MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{PLH} / t _{PHL}	Propagation delay time A thru H to Y	2.0		65	140		180		210	ns
		4.5		15	29		36		42	
		6.0		12	25		31		36	
t _{TLH} / t _{THL}	Output transition time	2.0		25	75		95		110	ns
		4.5		8	15		19		22	
		6.0		7	13		16		19	

AC Characteristics for HCT: $t_r=t_f=6ns$ $C_L=50pF$

SYMBOL	PARAMETER	V _{CC} (V)	T _A =25°C			GD74HCT133		GD54HCT133		UNIT
			MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{PLH} / t _{PHL}	Propagation delay time A thru H to Y	4.5		18	31		40		46	ns
t _{TLH} / t _{THL}	Output transition time	4.5		8	15		19		22	ns

AC Waveform

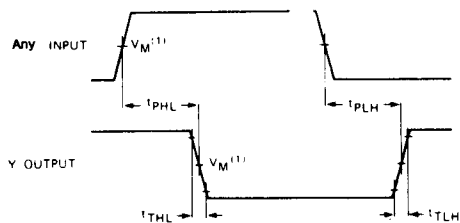


Fig. 2 Waveforms showing the (Any) Input to output (Y) propagation delays and the output transition times.

Note to AC waveform

(1) HC : V_M=50%. V_I=GND to V_{CC}
 HCT: V_M=1.3V. V_I=GND to 3V.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.