


# SILICON TRANSISTOR 2SC1009A

## FM/AM RF AMPLIFIER, MIXER, OSCILLATOR, CONVERTER NPN SILICON EPITAXIAL TRANSISTOR MINI MOLD

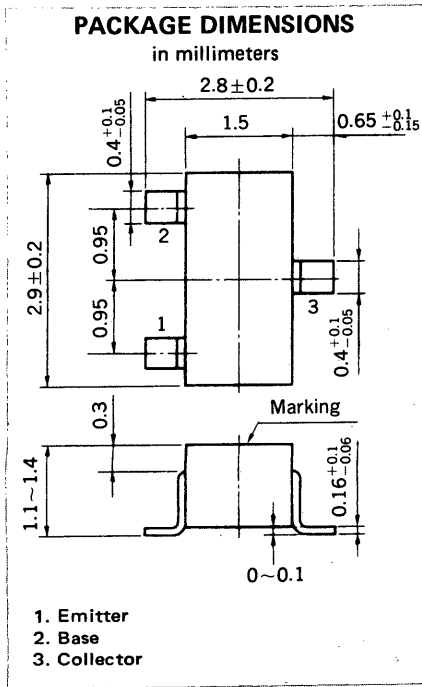

### FEATURES

- High Gain Bandwidth Product:  $f_T = 250$  MHz TYP.
- Low Output Capacitance:  $C_{ob} = 1.8$  pF TYP.
- Low Noise Figure: NF = 2.5 dB TYP.

### ABSOLUTE MAXIMUM RATINGS

Maximum Voltages and Current ( $T_a = 25^\circ\text{C}$ )

Collector to Base Voltage	$V_{CBO}$	50	V
Collector to Emitter Voltage	$V_{CEO}$	30	V
Emitter to Base Voltage	$V_{EBO}$	5.0	V
Collector Current (DC)	$I_C$	50	mA

Maximum Power Dissipation

Total Power Dissipation at $25^\circ\text{C}$ Ambient Temperature	$P_T$	150	mW
--	-------	-----	----

Maximum Temperatures

Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +125	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	$I_{CBO}$			0.1	$\mu\text{A}$	$V_{CB} = 50$ V, $I_E = 0$
Emitter Cutoff Current	$I_{EBO}$			0.1	$\mu\text{A}$	$V_{EB} = 5.0$ V, $I_C = 0$
DC Current Gain	$h_{FE}$	60	100	180		$V_{CE} = 6.0$ V, $I_C = 1.0$ mA*
Base to Emitter Voltage	$V_{BE}$	0.65	0.70	0.75	V	$V_{CE} = 6.0$ V, $I_C = 1.0$ mA
Collector Saturation Voltage	$V_{CE(sat)}$		0.08	0.3	V	$I_C = 10$ mA, $I_B = 1.0$ mA
Gain Bandwidth Product	$f_T$	150	250		MHz	$V_{CE} = 6.0$ V, $I_E = -1.0$ mA
Output Capacitance	$C_{ob}$		1.9	2.2	pF	$V_{CB} = 6.0$ V, $I_E = 0$ , $f = 1.0$ MHz
Collector to Base Time Constant	$C_c \cdot r_b' b$		10	15	ps	$V_{CB} = 6.0$ V, $I_E = -10$ mA, $f = 31.9$ MHz
Noise Figure	NF		2.0	4.0	dB	$V_{CE} = 6.0$ V, $I_E = -1.0$ mA, $f = 1.0$ MHz, $R_G = 500 \Omega$

\* Pulsed:  $PW \leq 350 \mu\text{s}$ , Duty Cycle  $\leq 2\%$


### $h_{FE}$ Classification

Marking	FA3	FA4
$h_{FE}$	60 to 120	90 to 180


TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

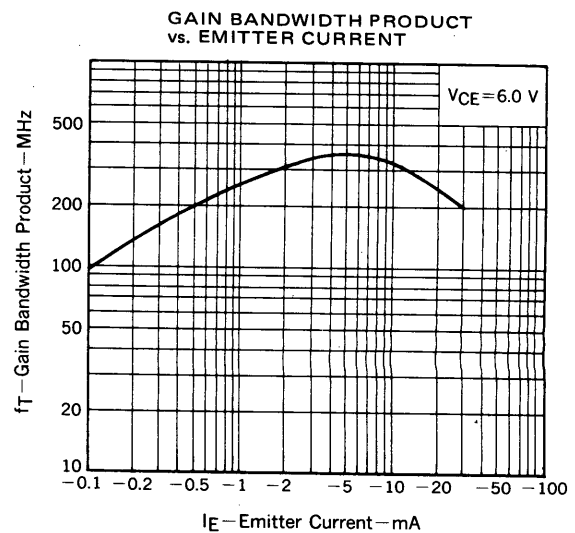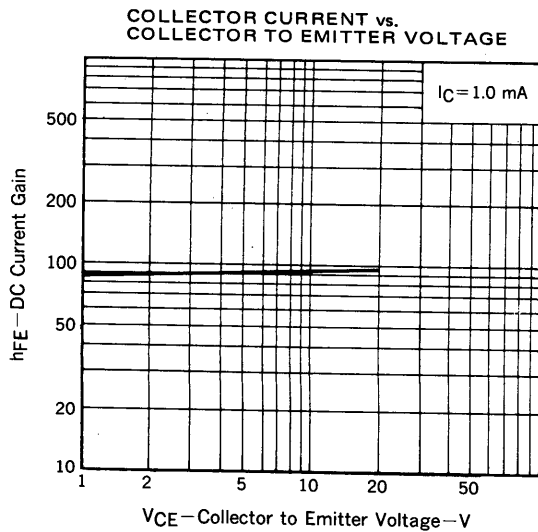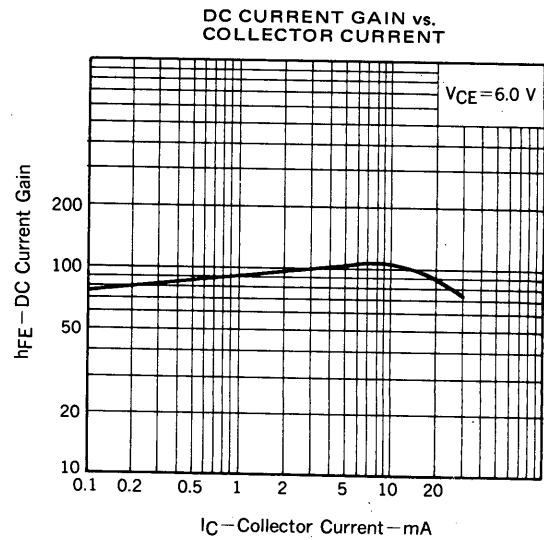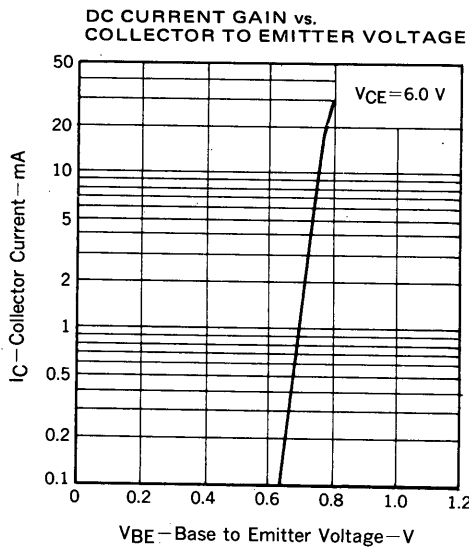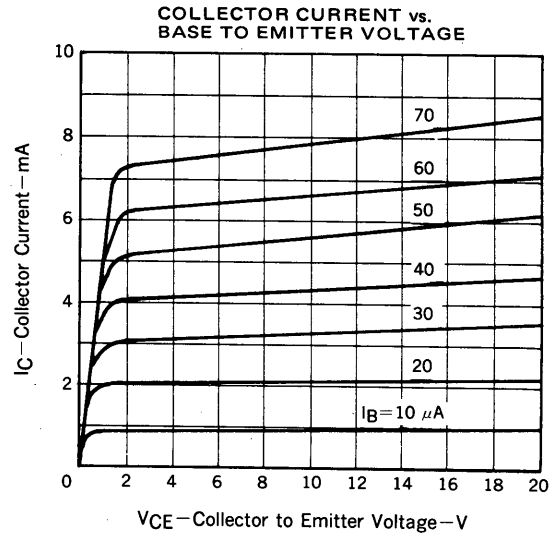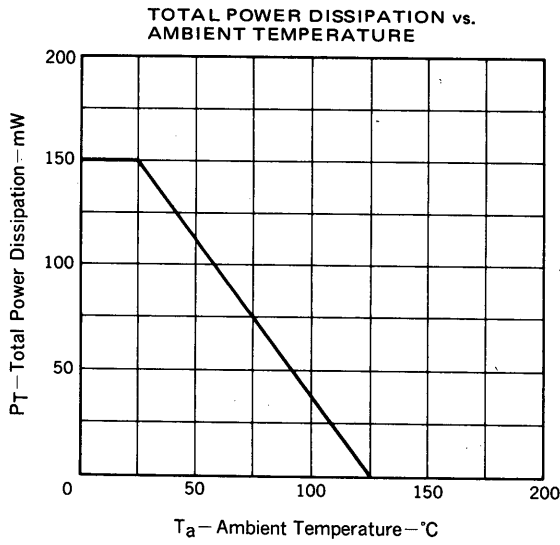


BASE AND COLLECTOR SATURATION VOLTAGE vs. COLLECTOR CURRENT

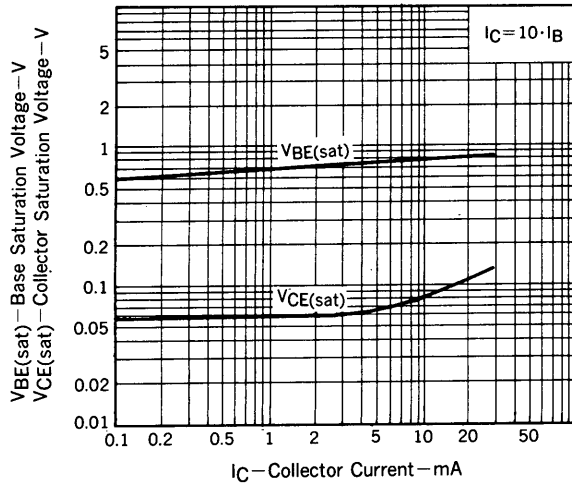


INPUT AND OUTPUT CAPACITANCE vs. REVERSE VOLTAGE

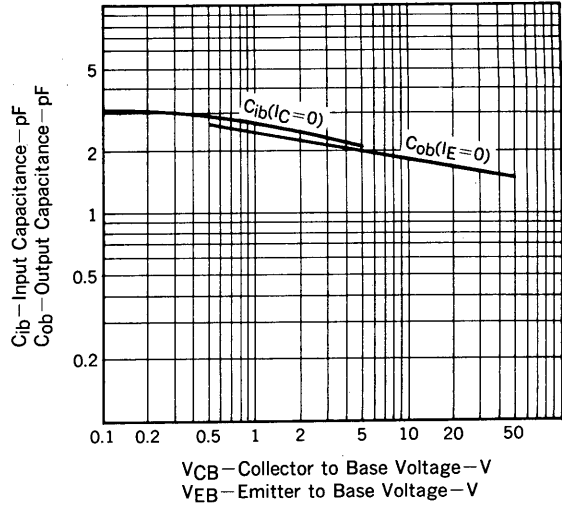


COLLECTOR TO BASE TIME CONSTANT vs. EMITTER CURRENT

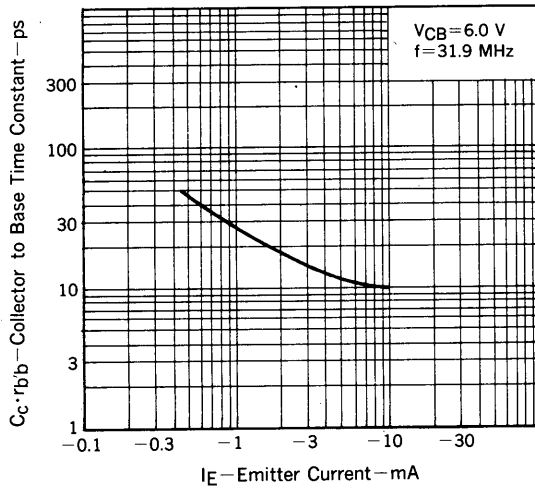


INPUT ADMITTANCE ( $y_{ie}$ ) vs. COLLECTOR CURRENT

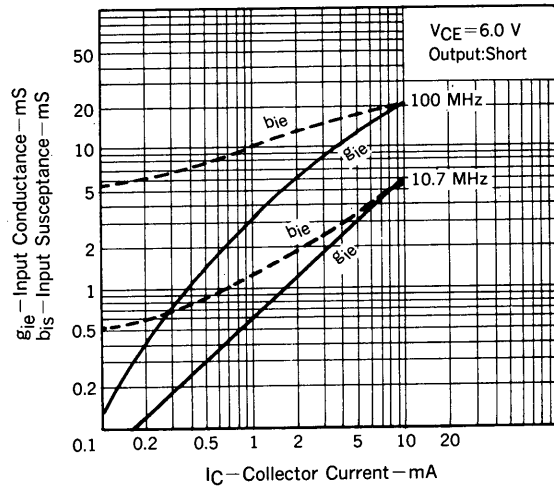


REVERSE TRANSFER ADMITTANCE ( $y_{re}$ ) vs. COLLECTOR CURRENT

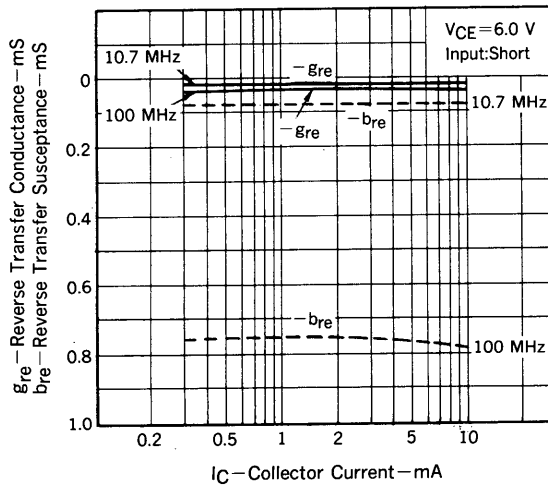


FORWARD TRANSFER ADMITTANCE ( $y_{fe}$ ) vs. COLLECTOR CURRENT

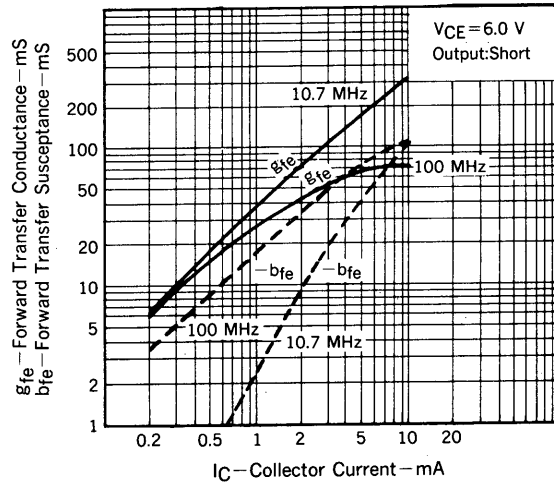


OUTPUT ADMITTANCE ( $y_{oe}$ ) vs. COLLECTOR CURRENT

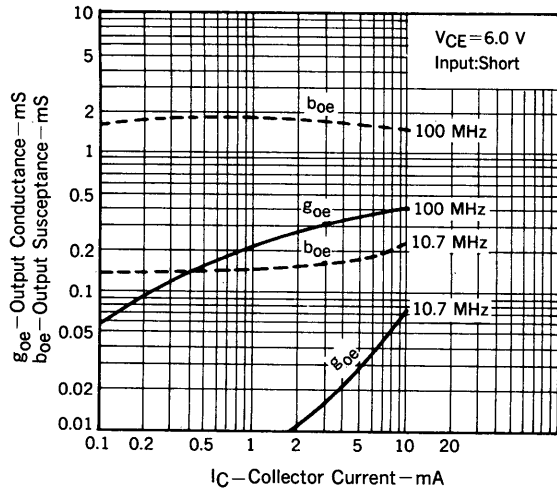


INPUT ADMITTANCE ( $y_{ib}$ ) vs. COLLECTOR CURRENT

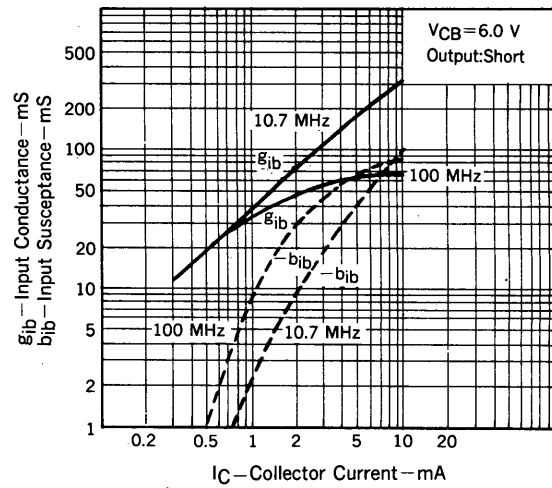

REVERSE TRANSFER ADMITTANCE ( $y_{rb}$ ) vs. COLLECTOR CURRENT

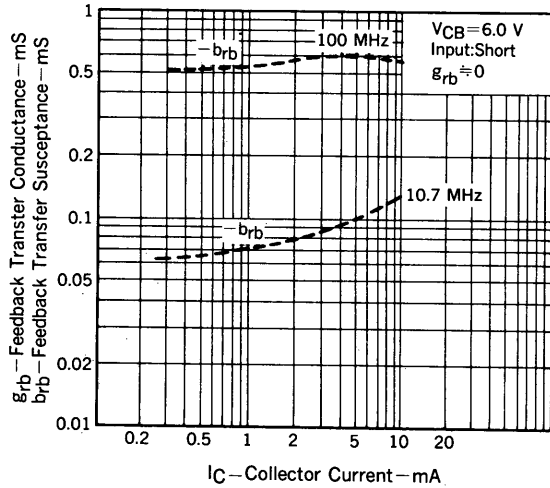

FORWARD TRANSFER ADMITTANCE ( $y_{fb}$ ) vs. COLLECTOR CURRENT

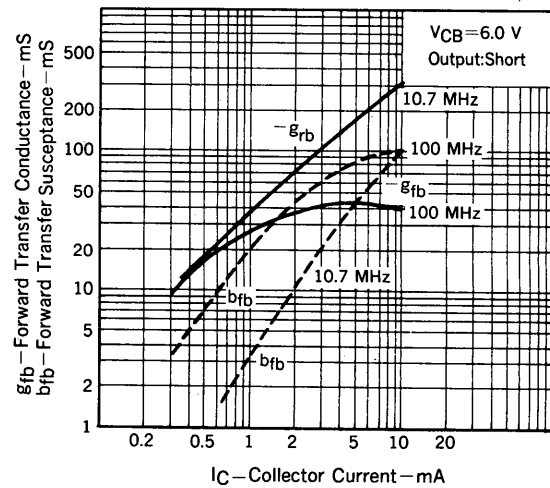

## NEC Corporation

INTERNATIONAL ELECTRON DEVICES DIV.  
 SUMITOMO MITA Building, 37-8,  
 Shiba Gochome, Minato-ku, Tokyo 108, Japan  
 Tel: Tokyo 456-3111  
 Telex Address: NECTOK J22686  
 Cable Address: NEC TOKYO



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.