



# AD1380—SPECIFICATIONS (typical @ $T_A = +25^\circ\text{C}$ , $V_S = +15\text{ V}$ , $+5\text{ V}$ combined sample-and-hold A/D converter unless otherwise noted)

Model	AD1380JD	AD1380KD	Units
RESOLUTION	16	*	Bits
ANALOG INPUTS			
Bipolar	$\pm 2.5, \pm 5, \pm 10$	*	Volts
Unipolar	0 to +5, 0 to +10	*	Volts
DIGITAL INPUTS <sup>1</sup>			
Convert Command	TTL Compatible Trailing Edge of Positive 50 ns (min) Pulse	*	
Logic Loading	1	*	LSTTL Load
TRANSFER CHARACTERISTICS <sup>2</sup> (COMBINED ADC/SHA)			
Gain Error	$\pm 0.1$ max, $\pm 0.05$ typ <sup>3</sup>	*	% FSR <sup>4</sup>
Unipolar Offset Error	$\pm 0.05$ max, $\pm 0.02$ typ <sup>3</sup>	*	% FSR
Bipolar Zero Error	$\pm 0.05$ max, $\pm 0.02$ typ <sup>3</sup>	*	% FSR
Linearity Error	$\pm 0.006$	$\pm 0.003$	% FSR
Differential Linearity Error	$\pm 0.003$	*	% FSR
Noise (10 V Unipolar)	85	*	$\mu\text{V rms}$
(20 V Bipolar)	115	*	$\mu\text{V rms}$
THROUGHPUT			
Conversion Time	14 max	*	$\mu\text{s}$
Acquisition Time (20 V Step)	6 max	*	$\mu\text{s}$
SAMPLE & HOLD			
Input Resistance	4	*	k $\Omega$
Small Signal Bandwidth	900	*	kHz
Aperture Time	50	*	ns
Aperture Jitter	100	*	ps rms
Droop Rate	50	*	$\mu\text{V/ms}$
$T_{\text{MIN}}$ to $T_{\text{MAX}}$	1	*	mV/ms
Feedthrough	-80	*	dB
DRIFT (ADC & SHA) <sup>5</sup>			
Gain	$\pm 20$ max	*	ppm/ $^\circ\text{C}$
Unipolar Offset	$\pm 5$ max ( $\pm 2$ typ)	*	ppm/ $^\circ\text{C}$
Bipolar Zero	$\pm 5$ max ( $\pm 2$ typ)	*	ppm/ $^\circ\text{C}$
No Missing Codes (Guaranteed)	0 to +70 (13 Bits)	0 to +70 (14 Bits)	$^\circ\text{C}$
DIGITAL OUTPUTS			
All Codes Complementary	TTL Compatible 5	*	LSTTL Loads
Clock Frequency	1.1	*	MHz
POWER SUPPLY REQUIREMENTS			
Analog Supplies	$\pm 15 \pm 0.5$	*	Volts
Digital Supply	$+5 \pm 0.25$	*	Volts
+15 V Supply Current	25	*	mA
-15 V Supply Current	30	*	mA
+5 V Supply Current	15	*	mA
Power Dissipation	900	*	mW
TEMPERATURE RANGE			
Specified	0 to +70	*	$^\circ\text{C}$
Operating	-25 to +85	*	$^\circ\text{C}$

## NOTES

<sup>1</sup>Logic "0" = 0.8 V, max. Logic "1" = 2.0 V, min for inputs. For digital outputs Logic "0" = 0.4 V max. Logic "1" = 2.4 V min.

<sup>2</sup>Tested on  $\pm 10\text{ V}$  and 0 V to +10 V ranges.

<sup>3</sup>Adjustable to zero.

<sup>4</sup>Full-scale range.

<sup>5</sup>Guaranteed but not 100% production tested.

\*Specifications same as AD1380JD.

Specifications subject to change without notice.

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage	±18 V
Logic Supply Voltage	+7 V
Analog Ground to Digital Ground	±0.3 V
Analog Inputs (Pins 6, 7, 31)	±V <sub>S</sub>
Digital Input	-0.3 V to V <sub>DD</sub> +0.3 V
Output Short Circuit Duration to Ground	
Sample/Hold	Indefinite
Data	1 sec for Any One Output
Junction Temperature	+175°C
Storage Temperature	-65°C to +150°C
Lead Temperature (Soldering, 10 sec)	+300°C

## ORDERING GUIDE

Model	Max Linearity Error	Temperature Range	Package Option
AD1380JD	0.006% FSR	0°C to +70°C	Ceramic (DH-32E)
AD1380KD	0.003% FSR	0°C to +70°C	Ceramic (DH-32E)

## THEORY OF OPERATION

A 16-bit A/D converter partitions the range of analog inputs into 2<sup>16</sup> discrete ranges or quanta. All analog values within a given quantum are represented by the same digital code, usually assigned to the nominal midrange value. There is an inherent quantization uncertainty of ±1/2 LSB, associated with the resolution, in addition to the actual conversion errors.

The actual conversion errors that are associated with A/D converters are combinations of analog errors due to the linear circuitry, matching and tracking properties of the ladder and scaling networks, reference error and power supply rejection. The matching and tracking errors in the converter have been minimized by the use of monolithic DACs that include the scaling network. The initial gain and offset errors are specified at ±0.1% FSR for gain and ±0.05% FSR for offset. These errors may be trimmed to zero by the use of external trim circuits as shown in Figures 2 and 3. Linearity error is defined for unipolar ranges as the deviation from a true straight line transfer characteristic from a zero voltage analog input, which calls for a zero digital output, to a point which is defined as a full scale. The linearity error is based on the DAC resistor ratios. It is unadjustable and is the most meaningful indication of A/D converter accuracy. Differential nonlinearity is a measure of the deviation in the staircase step width between codes from the ideal least significant bit step size (Figure 1).

Monotonic behavior requires that the differential linearity error be less than 1 LSB; however, a monotonic converter can have missing codes. The AD1380 is specified as having no missing codes over temperature ranges as specified on the data page.

## CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the AD1380 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.

There are three types of drift error over temperature: offset, gain and linearity. Offset drift causes a shift of the transfer characteristic left or right on the diagram over the operating temperature range. Gain drift causes a rotation of the transfer characteristic about the zero for unipolar ranges or minus full-scale point for bipolar ranges. The worst case accuracy drift is the summation of all three drift errors over temperature. Statistically, however, the drift error behaves as the root-sum-squared (RSS) and can be shown as:

$$RSS = \sqrt{\epsilon_G^2 + \epsilon_O^2 + \epsilon_L^2}$$

ε<sub>G</sub> = Gain Drift Error (ppm/°C)

ε<sub>O</sub> = Offset Drift Error (ppm of FSR/°C)

ε<sub>L</sub> = Linearity Error (ppm of FSR/°C)

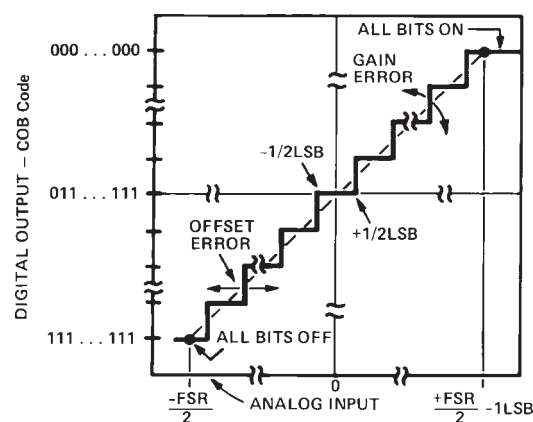


Figure 1. Transfer Characteristics for an Ideal Bipolar A/D

## DESCRIPTION OF OPERATION

On receipt of a CONVERT START command, the AD1380 converts the voltage at its analog input into an equivalent 16-bit binary number. This conversion is accomplished as follows: the 16-bit successive approximation register (SAR) has its 16-bit outputs connected to both the device bit output pins and the corresponding bit inputs of the feedback DAC. The analog input is successively compared to the feedback DAC output, one bit at a time (MSB first, LSB last). The decision to keep or reject each bit is then made at the completion of each bit comparison period, depending on the state of the comparator at that time.



# AD1380

## GAIN ADJUSTMENT

The gain adjust circuit consists of a 100 ppm/°C potentiometer connected across  $\pm V_S$  with its slider connected through a 300 k $\Omega$  resistor to the gain adjust Pin 3 as shown in Figure 2.

If no external trim adjustment is desired, Pin 5 (OFFSET ADJ) and Pin 3 (GAIN ADJ) may be left open.

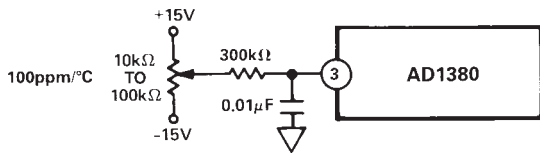


Figure 2. Gain Adjustment Circuit ( $\pm 0.2\%$  FSR)

## OFFSET ADJUSTMENT

The zero adjust circuit consists of a 100 ppm/°C potentiometer connected across  $\pm V_S$  with its slider connected through a 1.8 M $\Omega$  resistor to Comparator Input Pin 5 for all ranges. As shown in Figure 3, the tolerance of this fixed resistor is not critical, and a carbon composition type is generally adequate. Using a carbon composition resistor having a  $-1200$  ppm/°C tempco contributes a worst-case offset tempco of  $32 \text{ LSB}_{14} \times 61 \text{ ppm/LSB}_{14} \times 1200 \text{ ppm/°C} = 2.3 \text{ ppm/°C}$  of FSR, if the OFFSET ADJ potentiometer is set at either end of its adjustment range. Since the maximum offset adjustment required is typically no more than  $\pm 16 \text{ LSB}_{14}$ , use of a carbon composition offset summing resistor typically contributes no more than 1 ppm/°C of FSR offset tempco.

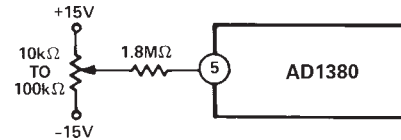


Figure 3. Offset Adjustment Circuit ( $\pm 0.3\%$  FSR)

An alternate offset adjust circuit, which contributes negligible offset tempco if metal film resistors (tempco  $< 100$  ppm/°C) are used, is shown in Figure 4.


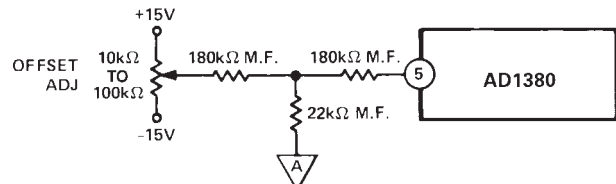


Figure 4. Low Tempco Zero Adjustment Circuit

In either adjust circuit, the fixed resistor connected to Pin 5 should be located close to this pin to keep the pin connection runs short. Comparator Input Pin 5 is quite sensitive to external noise pickup and should be guarded by analog common.

## TIMING

The timing diagram is shown in Figure 5. Receipt of a CONVERT START signal sets the STATUS flag, indicating conversion in progress. This, in turn, removes the inhibit applied to the gated clock permitting it to run through 17 cycles. All the

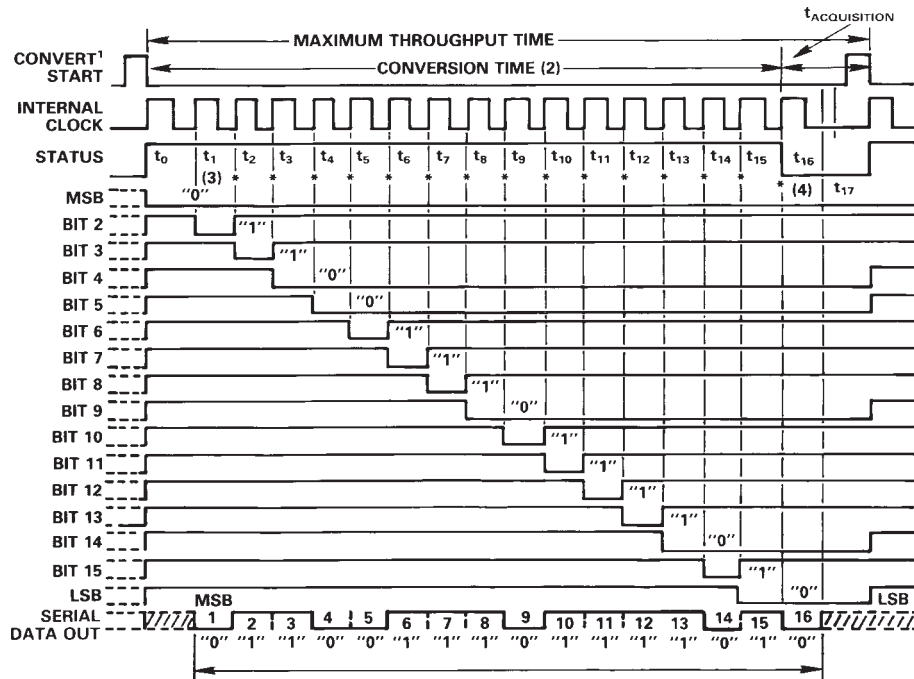

### NOTES

1. THE CONVERT START PULSE WIDTH IS 50ns MIN AND MUST REMAIN LOW DURING A CONVERSION. THE CONVERSION IS INITIATED BY THE "TRAILING EDGE" OF THE CONVERT COMMAND.
2.  $t_{CONV} = 14\mu\text{s}$  (MAX),  $t_{ACQ} = 6\mu\text{s}$  (MAX).
3. MSB DECISION.
4. CLOCK REMAINS LOW AFTER LAST BIT DECISION.

Figure 5. Timing Diagram (Binary Code 0110011101 111010)

SAR parallel bits, STATUS flip-flops and the gated clock inhibit signal are initialized on the trailing edge of the CONVERT START signal. At time  $t_0$ ,  $B_1$  is reset and  $B_2 - B_{16}$  are set unconditionally. At  $t_1$  the Bit 1 decision is made (keep) and Bit 2 is reset unconditionally. This sequence continues until the Bit 16 (LSB) decision (keep) is made at  $t_{16}$ . The STATUS flag is reset, indicating that the conversion is complete and the parallel output data is valid. Resetting the STATUS flag restores the gated clock inhibit signal, forcing the clock output to the low Logic "0" state. Note that the clock remains low until the next conversion.

Corresponding parallel data bits become valid on the same positive-going clock edge.

### DIGITAL OUTPUT DATA

Both parallel and serial data from TTL storage registers is in negative true form (Logic "1" = 0 V and Logic "0" = 2.4 V). Parallel data output coding is complementary binary for unipolar ranges and complementary offset binary for bipolar ranges. Parallel data becomes valid at least 20 ns before the STATUS flag returns to Logic "0," permitting parallel data transfer to be clocked on the "1" to "0" transition of the STATUS flag (see Figure 6).

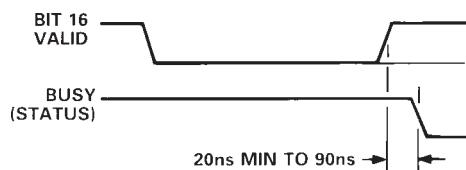


Figure 6. LSB Valid to Status Low

Serial data coding is complementary binary for unipolar input ranges and complementary offset binary for bipolar input ranges. Serial output is by bit (MSB first, LSB last) in NRZ (non-return-to-zero) format. Serial and parallel data outputs change state on positive-going clock edges. Serial data is guaranteed valid 120 ns after the rising clock edges, permitting serial data to be clocked directly into a receiving register on the negative-going clock edges as shown in Figure 7. There are 17 negative-going clock edges in the complete 16-bit conversion cycle. The first negative edge shifts an invalid bit into the register, which is shifted out on the last negative-going clock edge. All serial data bits will have been correctly transferred and be in the receiving shift register locations shown at the completion of the conversion period.

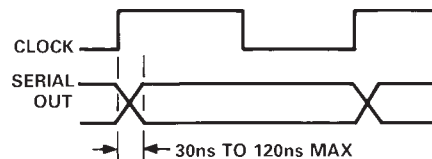


Figure 7. Clock High to Serial Out Valid

### INPUT SCALING

The AD1380 inputs should be scaled as close to the maximum input signal range as possible in order to utilize the maximum signal resolution of the A/D converter. Connect the input signal as shown in Table I. See Figure 8 for circuit details.

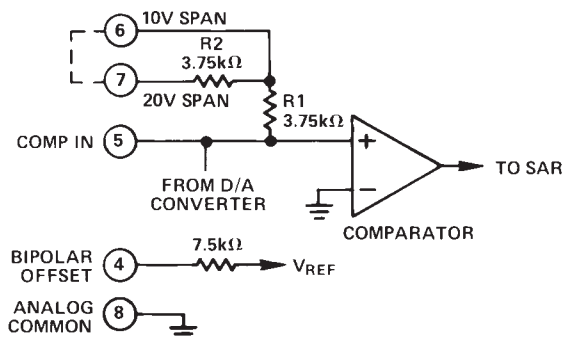


Figure 8. AD1380 Input Scaling Circuit

Table I. AD1380 Input Scaling Connections

Input Signal Line	Output Code	Connect Pin 4 to Pin	Connect Pin 7 to	Connect Input Signal to
±10 V	COB	5	Input Signal	7
±5 V	COB	5	Open	6
±2.5 V	COB	5	Pin 5	6
0 V to +5 V	CSB	NC	Pin 5	6
0 V to +10 V	CSB	NC	Open	6

#### NOTE

Pin 5 is extremely sensitive to noise and should be guarded by analog common.





# AD1380

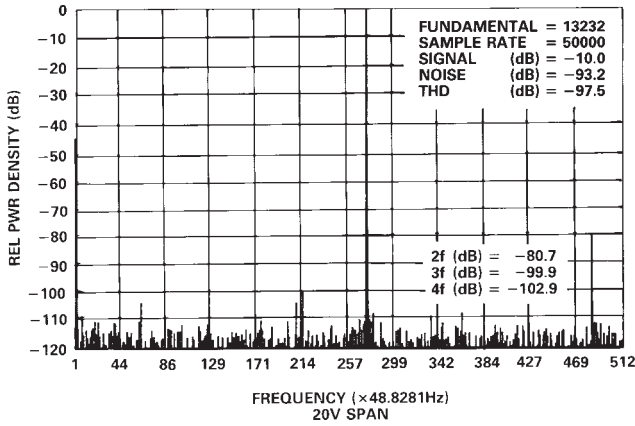


Figure 12.

At lower input frequencies, however, THD performance is improved. Figure 13 shows a full-scale (-0.3 dB) input signal at 1.41 kHz. THD is now -96.0 dB.

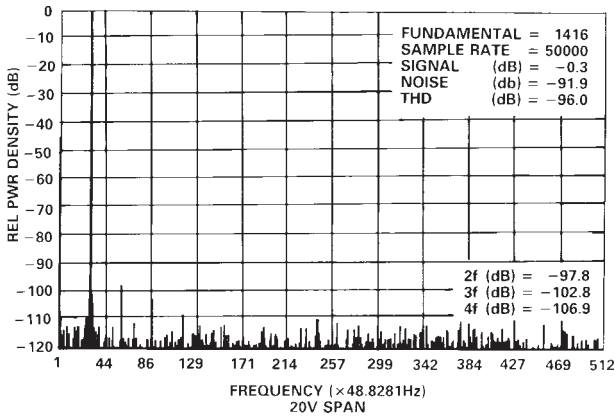


Figure 13.

The ultimate noise floor can be seen with low level input signals of any frequency. In Figure 14 the noise floor is at -94 dB, as demonstrated with an input signal of 24 kHz at 39.8 dB.


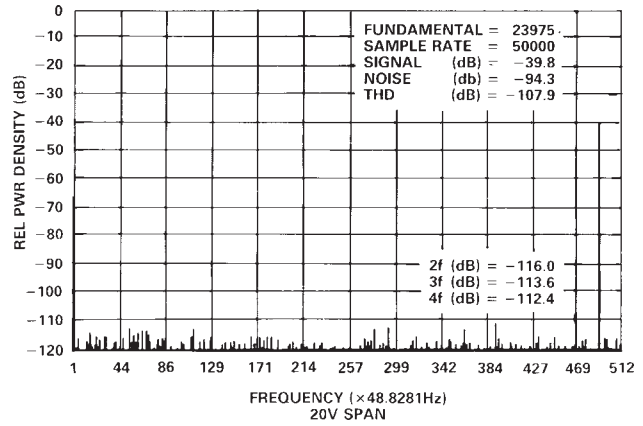


Figure 14.

## OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).



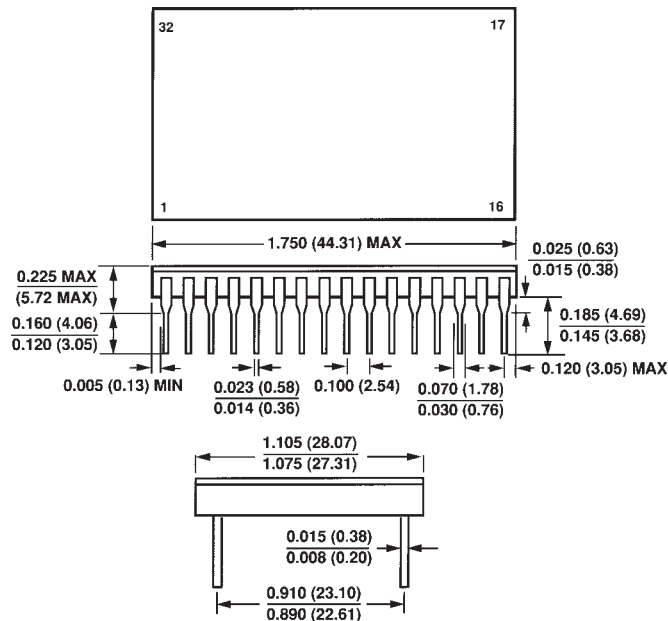

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.