


**CBCX68
CBCX69**

**SILICON COMPLEMENTARY
SMALL SIGNAL TRANSISTORS**

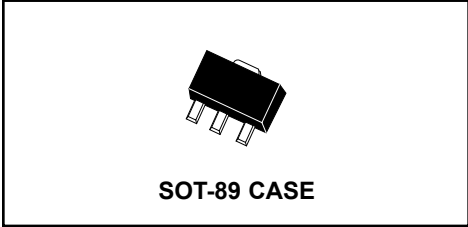

Central™

Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CBCX68, CBCX69 types are complementary silicon transistor manufactured by epitaxial planar process, epoxy molded in a surface mount package, designed for applications requiring high current capability.

MAXIMUM RATINGS (T_A=25°C)


	SYMBOL		UNITS
Collector-Emitter Voltage	V _{CES}	25	V
Collector-Emitter Voltage	V _{CEO}	20	V
Emitter-Base Voltage	V _{EBO}	5.0	V
Collector Current	I _C	1.0	A
Collector Current-Peak	I _{CM}	2.0	A
Base Current	I _B	100	mA
Base Current Peak	I _{BM}	200	mA
Power Dissipation	P _D	1.2	W
Operating and Storage			
Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Temperature	θ _{JA}	104	°C/W

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _{CBO}	V _{CB} =25V			100	nA
I _{CBO}	V _{CB} =25V, T _A =150°C				μA
I _{EBO}	V _{EB} =5.0V			10	μA
BV _{CBO}	I _C =10μA	25			V
BV _{CEO}	I _C =10mA	20			V
BV _{EBO}	I _E =1.0μA	5.0			V
V _{CE(SAT)}	I _C =1.0A, I _B =100mA			0.5	V
V _{BE(ON)}	V _{CE} =10V, I _C =5.0mA		0.6		V
V _{BE(ON)}	V _{CE} =1.0V, I _C =1.0A			1.0	V
h _{FE}	V _{CE} =10V, I _C =500mA	50			
h _{FE}	V _{CE} =1.0, I _C =500mA	85		375	
h _{FE}	V _{CE} =1.0V, I _C =1.0A	60			
f _T	V _{CE} =5.0V, I _C =10mA, f=20MHz	65			MHz

SILICON COMPLEMENTARY
SMALL SIGNAL TRANSISTORS

MECHANICAL OUTLINE - SOT-89

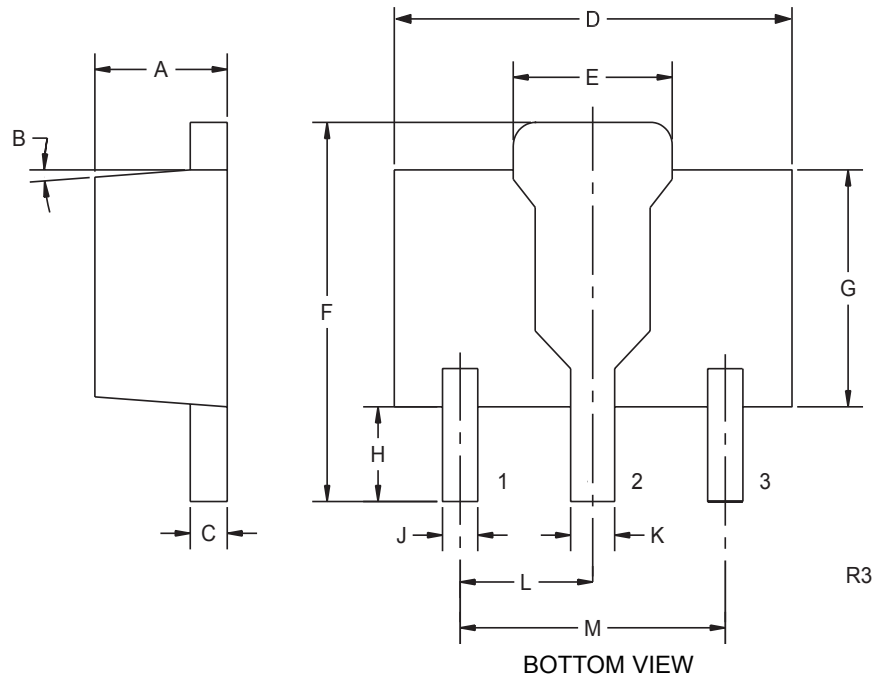

LEAD CODE:

- 1) EMITTER
- 2) COLLECTOR
- 3) BASE

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.055	0.067	1.40	1.70
B	4°		4°	
C	0.016	0.018	0.40	0.46
D	0.173	0.185	4.40	4.70
E	0.070	0.074	1.79	1.87
F	0.146	0.177	3.70	4.50
G	0.094	0.106	2.40	2.70
H	0.028	0.051	0.70	1.30
J	0.015	0.019	0.38	0.48
K	0.019	0.023	0.48	0.58
L	0.059		1.50	
M	0.118		3.00	

SOT-89 (REV: R3)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.