



FEATURES

- 20 - 300 MHz
- 20 dB Linear Range Typical
- ± 0.8 dB Linearity
- +44 dBm 3rd Order Intercept
- 0.8 dB Insertion Loss
- 14 Pin DIP
- See 100C0911 For Connectorized Version




MODEL NO.
DA0035

PIN Diode Linear VCA

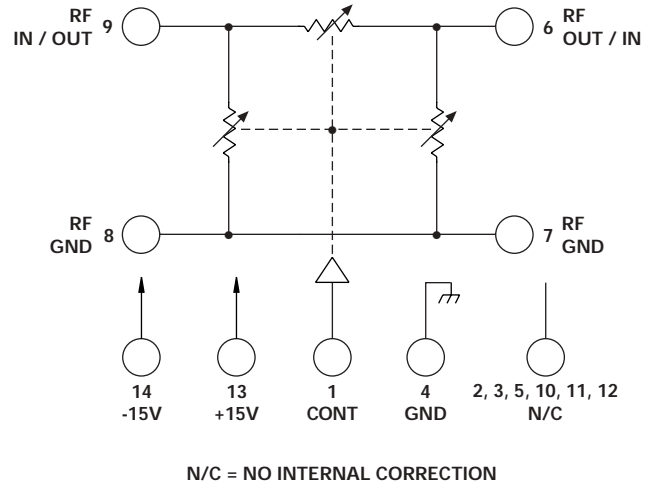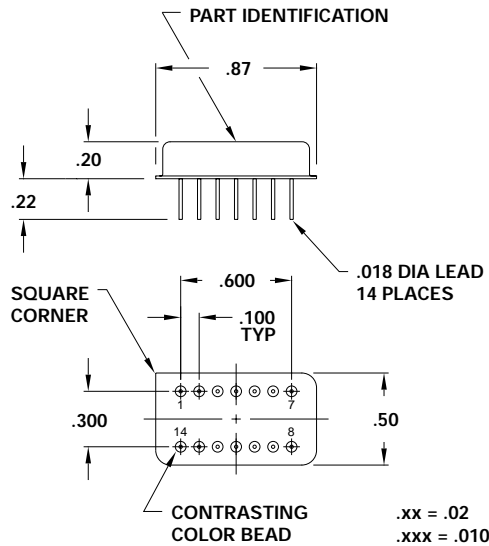

TYPICAL PERFORMANCE

Attenuation vs Control Voltage
At 100 MHz

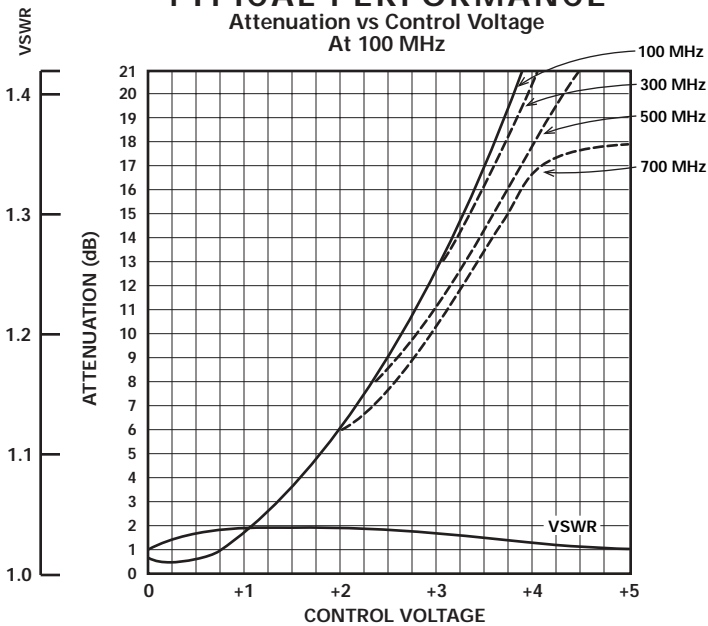

GUARANTEED PERFORMANCE

| Parameter | Min | Typ | Max | Units | Conditions |
|-----------------------|-----|-----------|--------|-------|--|
| Operating Frequency | 20 | | 300 | MHz | |
| DC Current | | 25 | 25 | mA | At +15 VDC Supply At -15 VDC Supply |
| Control Current | | | 1 | mA | 0 V to +5 V Control |
| Insertion Loss | | 0.8 | 1.5 | dB | |
| Attenuation | | | | | |
| Range | 18 | 20 | | dB | Best Straight Line Fit From IL +1.5 dB to 18 dB |
| Slope | | 6.5 ± 1.5 | | dB/V | |
| Linearity | | ± 0.8 | | dB | |
| VSWR | | 1.15 | 1.25/1 | | |
| Impedance | | 50 | | OHMS | |
| Slew Rate | | 6 | | dB/μs | |
| Intercept Points | | | | | |
| 2nd | | +77 | | dBm | |
| 3rd | | +44 | | dBm | |
| RF Power | | | | | |
| Operate | | | +10 | dBm | |
| No Damage | | | +20 | dBm | |
| Operating Temperature | 0 | +25 | +60 | °C | TA |



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.