

FEATURES



- 100 - 600 MHz
- 20 dB Linear Range Typical
- ± 0.5 dB Linearity
- 1.5 dB Insertion Loss
- +42 dBm 3rd Order Intercept
- 14 Pin DIP



MODEL NO.
DA0425


PIN Diode Linear VCA

VCA

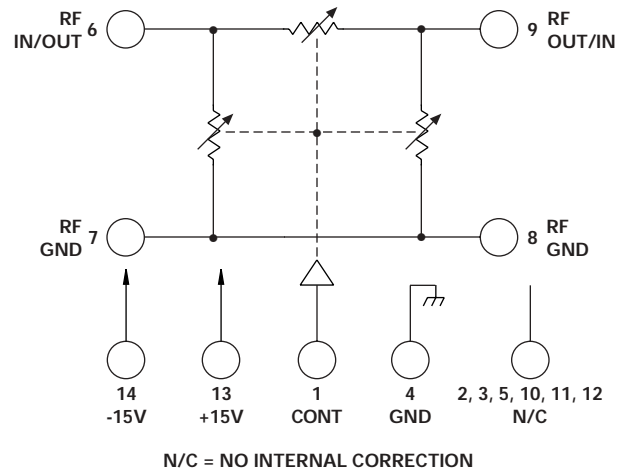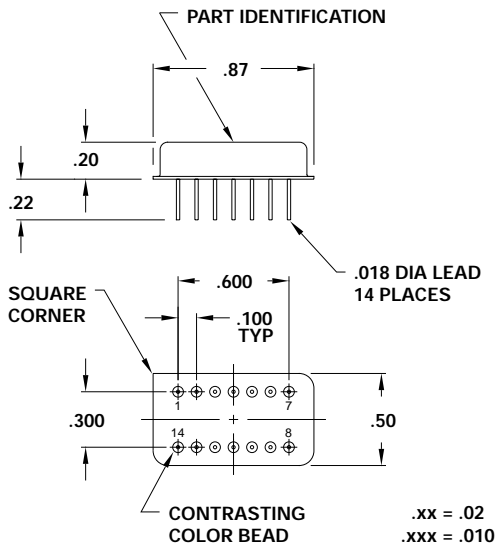

TYPICAL PERFORMANCE

Attenuation vs Control Voltage
at 500 MHz

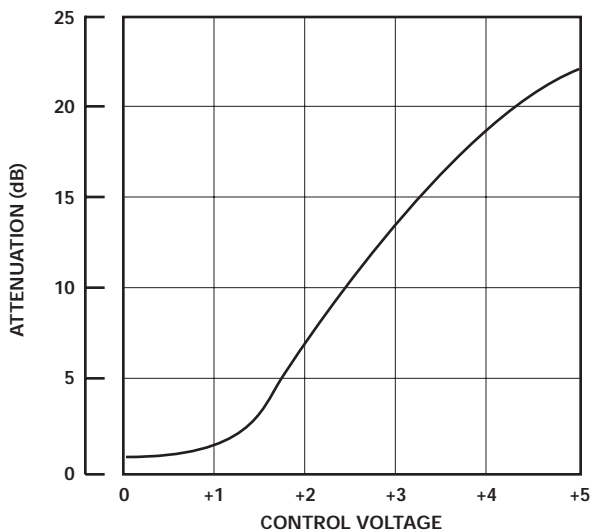

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	100		600	MHz	
DC Current		33	50	mA	At +15 VDC Supply
		22	40	mA	At -15 VDC Supply
Control Type					0 to 5V (Analog Input)
Control Current		0.5	1	mA	0 V = I.L. +5 V = Max. Atten.
Insertion Loss			1.5	dB	At 0 V Control
Attenuation	Range	18		dB	0 V to 5 V Control
	Slope	5.0	6.5	dB/V	Ref. to Best Straight Line Fit
	Linearity		± 0.5	dB	Best Straight Line Fit From IL +1.5 dB to 15 dB
VSWR		1.1/1	1.25/1		
Impedance		50		OHMS	
Slew Rate		6.5		dB/ μ s	
Intercept Points	2nd	+75		dBm	127 MHz / 214 MHz
	3rd	+42		dBm	107 MHz / 127 MHz
RF Power	Operate		+10	dBm	
	No Damage		+20	dBm	
Operating Temperature	-55	+25	+85	$^{\circ}$ C	TA



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.