

AN7086S


Recording/Playback Pre-/Power Amplifier IC for 3V Microcassette

■ Overview


The AN7086S is an integrated circuit developed for recording playback pre-/power amp., built-in VAS (Voice Activated System) function especially.

■ Features

- Rec. playback pre-/power amp. IC
- VAS function built-in
- Earphone monitor at recording is possible
- 350mW BTL, OCL power amp. built-in
- Mic. amp built-in
- ALC function built-in
- Rec./Play switching is possible with a single circuit switch

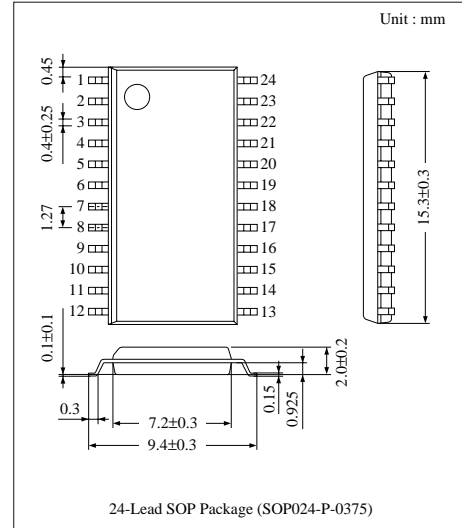

■ Block Diagram

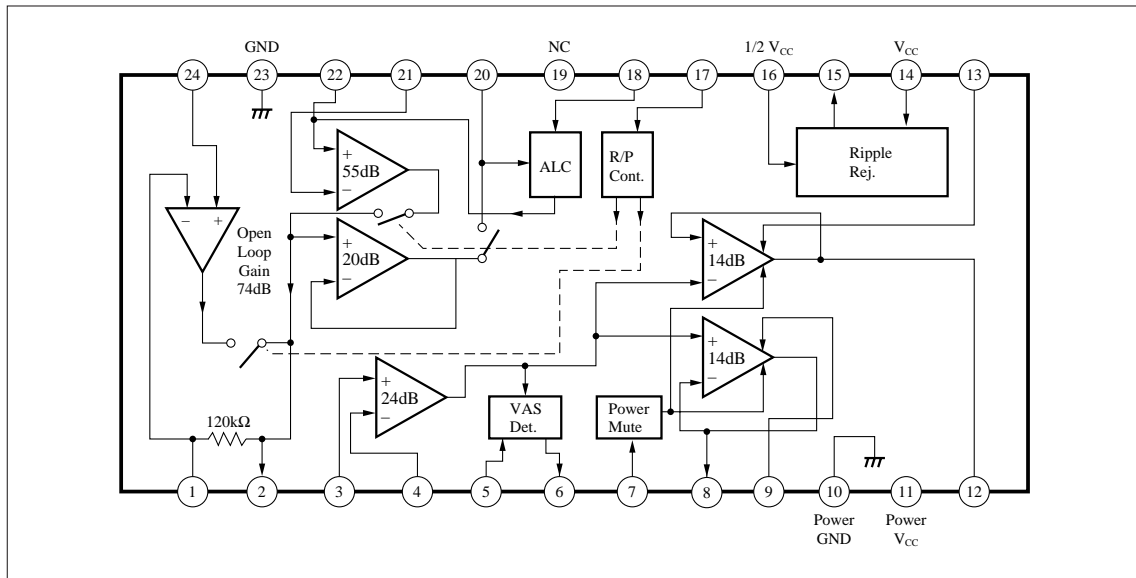

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	V _{CC}	6	V
Supply Current	I _{CC}	1000	mA
Power Dissipation	P _D	520	mW
Operating Ambient Temperature	T _{opr}	-20 ~ + 75	°C
Storage Temperature	T _{stg}	-55 ~ + 125	°C

■ Recommended Operating Range (Ta= 25°C)

Parameter	Symbol	Range
Operating Supply Voltage Range	V _{CC}	1.8V ~ 4.5V

■ Electrical Characteristics (V_{CC}=3V, f=1kHz, Ta=25°C)

Parameter	Symbol	Condition	min.	typ.	max.	Unit
Quiescent Circuit Current	I _{tot}	At No Input/Playback	10	20	35	mA

<Pre-Amp.>

Open Circuit Gain	G _{V1}	V _{in} = - 85dBV, R _g = 1kΩ	65	74	—	dB
Total Harmonic Distortion	THD _I	V _{in} = 3mVrms, R _g = 1kΩ	—	0.1	1	%
Maximum Output Voltage	V _{O1}	THD= 1%, R _g = 1kΩ	0.3	0.6	—	Vrms
Noise Voltage Referred to Input	V _{ni}	R _g = 1kΩ, DIN/AUDIO Filter	—	1	1.8	μVrms

<Recording Amp.>

Close Circuit Gain	G _{V2}	V _{in} = - 80dBV	69.5	72.5	75.5	dB
Total Harmonic Distortion	THD _R	V _{in} = - 80dBV	—	1.3	3	%
Maximum Output Voltage	V _{oR}	THD = 5%	0.8	1.08	—	Vrms
Output Noise Voltage	V _{nR}	R _g = 2.2kΩ, DIN/AUDIO Filter	—	-46	-42	dBV

<Power Amp.>

Closed Circuit Gain	G _{V - P_O}	V _{in} = 5mVrms, R _L = 8Ω	38.5	41	43.5	dB
Total Harmonic Distortion	THD - P _O	V _{in} = 5mVrms, R _L = 8Ω	—	0.11	1	%
Maximum Output Voltage	V _{O - P_O}	THD = 10%, R _L = 8Ω	300	350	—	mW
Output Noise Voltage	V _{n - P_O}	R _g = 0Ω, R _L = 8Ω, DIN/AUDIO Filter	—	-74	-65	dBV
Output Offset Voltage	V _{DC}	R _g = 0Ω, R _L = 8Ω,	-50	0	50	mV

<VAS>

VAS Operation Input Voltage	VAS	Mic. input level at Piny Voltage= 0.2V	8	14	18	μVrms
-----------------------------	-----	---	---	----	----	-------

<ALC>

Effective Voltage	V _{ALC}	V _{in} = - 60dBV, R _g = 1.5kΩ	-6.6	-4.5	-2.5	dBV
Effective width	W _{ALC}	V _{in} = - 30dBV, R _g = 1.5kΩ	—	1.5	3	%






<Ripple Rejection>







Playback System Ripple Rejection	RR _P	f _r = 270Hz, V _r = 30mVrms, R _g = 1kΩ	—	-70	-50	dBV
Recording System Ripple Rejection	RR _R	f _r = 270Hz, V _r = 30mVrms, R _g = 2.2kΩ	—	-40	-30	dBV

<Switching Pin>

Rec./Playback Switching Pin	V _{PB}	Playback mode	0.1	—	0.3	V
Rec./Playback Switching Pin	V _{REC}	Recording mode	1.6	—	2.3	V

■ Characteristics Curve

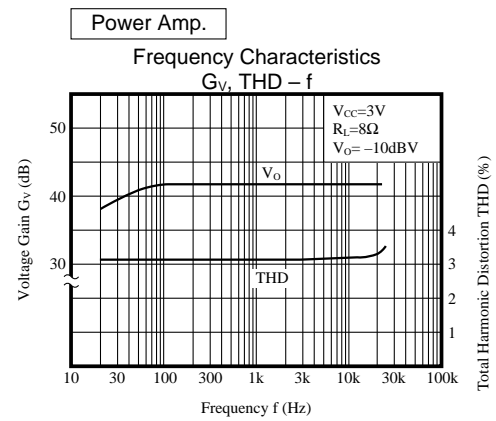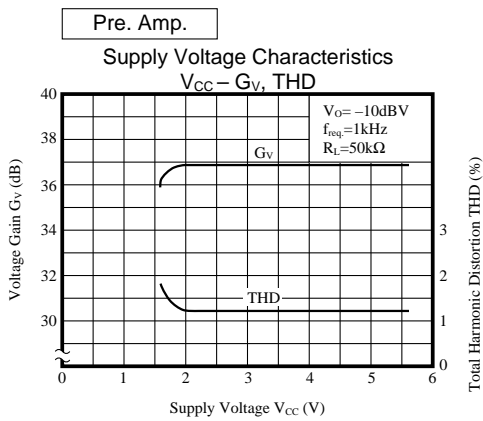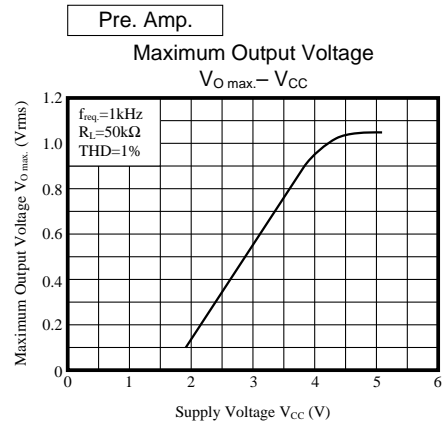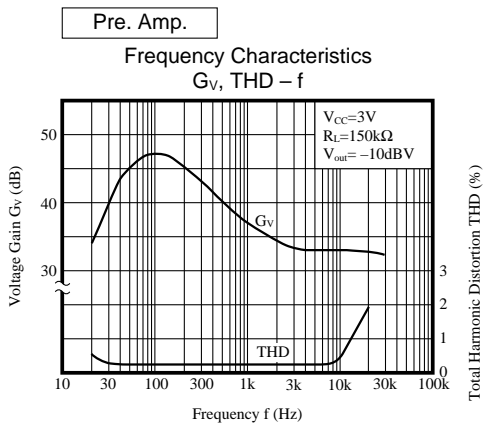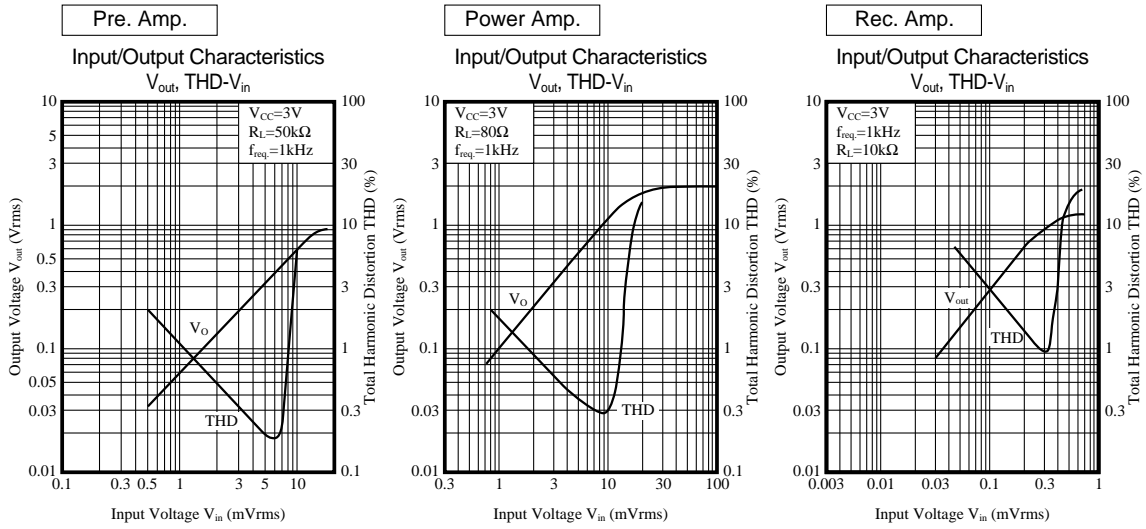

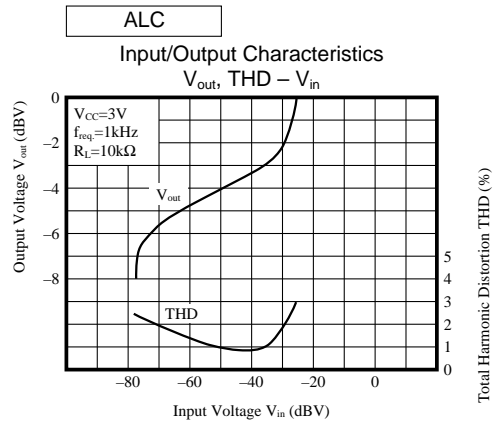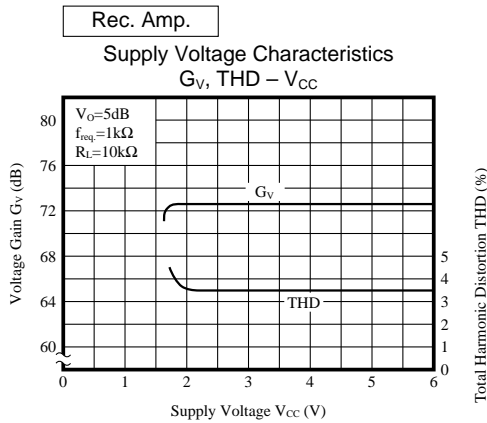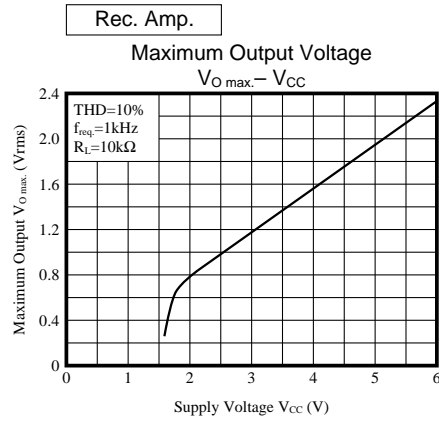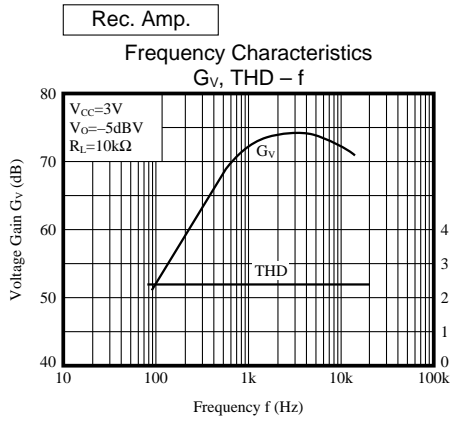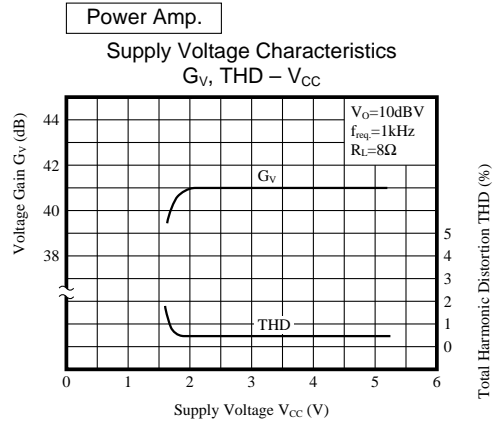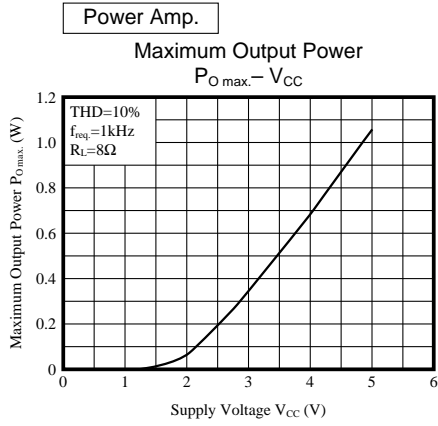



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.