

## FEATURES





- 100 - 2000 MHz
- 48 dB Range
- TO-8 Package
- Low Cost

VCA



MODEL NO.  
DA0930

PIN Diode VCA

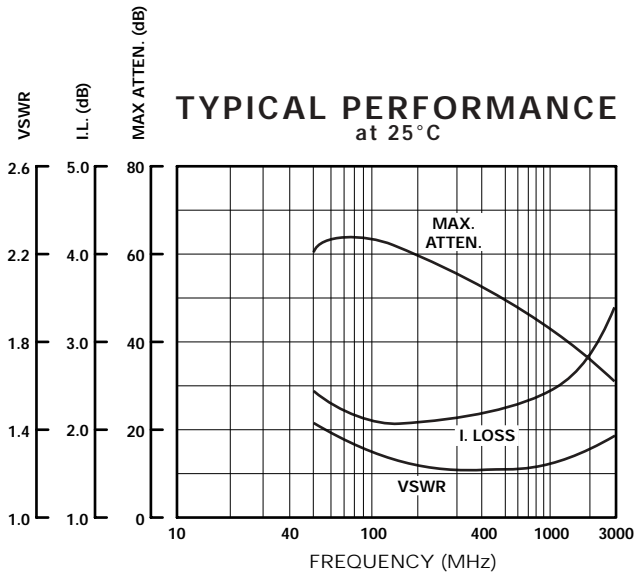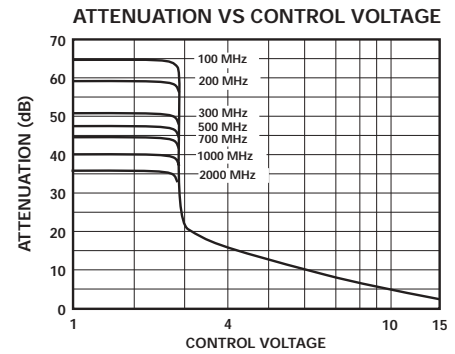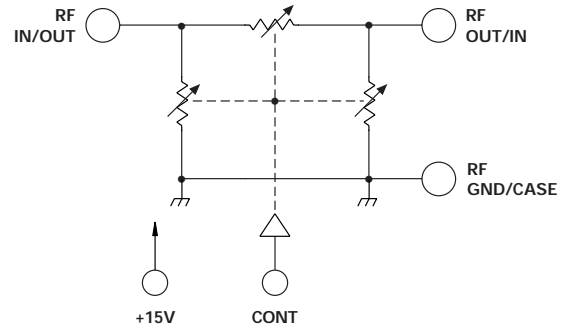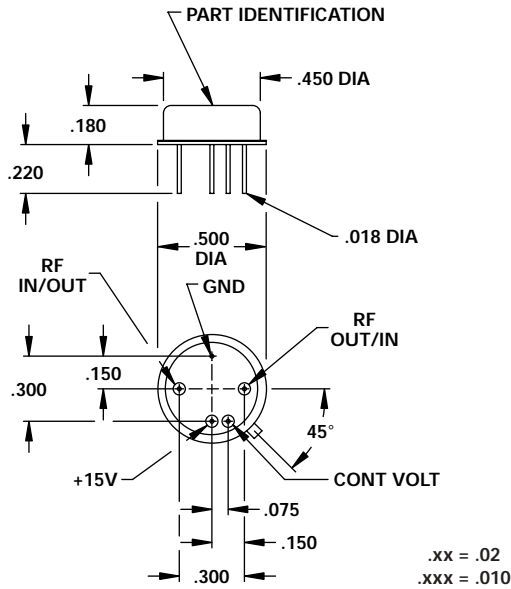

## GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	100		2000	MHz	
DC Current		4	10	mA	At +15 V
		8	10	mA	0 V Max. Atten., 15 V = I.L.
Control Type					0 to +15 VDC into a 2K OHM ±20% Input Impedance
Insertion Loss		2.3	3.0	dB	100 - 500 MHz
		2.4	3.25	dB	500 - 1000 MHz
		2.9	3.75	dB	1000 - 2000 MHz
Max Attenuation	40	48		dB	100 - 500 MHz
	35	41		dB	500 - 1000 MHz
	25	36		dB	1000 - 2000 MHz
Flatness		±0.5	±1.0	dB	100 - 1000 MHz
		±1.0	±1.5	dB	1000 - 2000 MHz
VSWR		1.4/1	1.8/1		100 - 1000 MHz
		1.4/1	2/1		1000 - 2000 MHz
		1.5/1	2.2/1		1000 - 2000 MHz
Impedance		50		OHMS	
Slew Rate		1	2	µSec	10% / 90% RF
		4	6	µSec	50% Cont 0% / 100% RF
Intercept Points	2nd	+37		dB	300 MHz / 200 MHz
	3rd	+41		dB	150 MHz / 200 MHz
RF Power	Operate	+10	+6	dBm	100 - 200 MHz
		+13	+10	dBm	200 - 500 MHz
		+20	+15	dBm	500 - 2000 MHz
	No Damage		+23	dBm	
Operating Temperature	-55	+25	+125	°C	TA



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.