


Datasheet

- * Low noise
- * High gain
- * For low-noise front end amplifiers
- * For DBS down converters



ESD: **E**lectrostatic **d**ischarge sensitive device, observe handling precautions!

Type	Marking	Ordering code (tape and reel)	Pin Configuration				Package 1)
			1	2	3	4	
CFY 35-20	NA	Q62702-F1393	S	D	S	G	MW-4
CFY 35-23	NB	Q62702-F1394					

Maximum ratings	Symbol	Value	Unit
Drain-source voltage	V_{DS}	5	V
Drain-gate voltage	V_{DG}	6	V
Gate-source voltage	V_{GS}	-4 ... 0	V
Drain current	I_D	60	mA
Channel temperature	T_{Ch}	150	°C
Storage temperature range	T_{stg}	-40...+150	°C
Total power dissipation ($T_S \leq 53^\circ\text{C}$) ²⁾	P_{tot}	180	mW
Thermal resistance			
Channel-soldering point ²⁾	R_{thChS}	540	K/W

1) Dimensions see chapter Package Outlines

2) T_s is measured on the source 1 lead at the soldering point to the PCB.

Electrical characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Characteristics	Symbol	min	typ	max	Unit
Drain-source saturation current $V_{DS} = 2.5\text{ V}, V_{GS} = 0\text{ V}$	I_{DSS}	10	25	45	mA
Pinch-off voltage $V_{DS} = 2.5\text{ V}, I_D = 1\text{ mA}$	$V_{GS(P)}$	-0.2	-1.2	-2.5	V
Transconductance $V_{DS} = 2.5\text{ V}, I_D = 10\text{ mA}$	g_m	20	30	-	mS
Gate leakage current $V_{DS} = 2.5\text{ V}, I_D = 10\text{ mA}$	I_G	-	0.1	2	μA
Noise figure $V_{DS} = 2.5\text{ V}, I_D = 10\text{ mA}, f = 12\text{ GHz}$ CFY 35-20 CFY 35-23	F	-	1.9 2.2	2.0 2.3	dB
Associated gain $V_{DS} = 2.5\text{ V}, I_D = 10\text{ mA}, f = 12\text{ GHz}$	G_a	8	8.5	-	dB


Typical Common Source Noise Parameters

$I_D = 10\text{ mA}$ $V_{DS} = 2.5\text{ V}$ $Z_0 = 50\ \Omega$

f	F_{min}	G_a	Γ_{opt}		R_n	r_n	N	$F_{50\Omega}$	$G(F_{50\Omega})$
GHz	dB	dB	MAG	ANG	Ω	-	-	dB	dB
2	0.60	17.6	0.82	32	35	0.7	0.08	2.35	12.9
4	0.83	14.2	0.73	65	25	0.5	0.11	2.30	11.2
6	1.10	11.8	0.65	105	14	0.28	0.14	2.35	9.5
8	1.38	10.5	0.60	146	5.5	0.11	0.19	2.55	7.8
10	1.64	9.4	0.58	-177	3	0.06	0.22	2.80	6.5
12	1.90	8.5	0.61	-139	10	0.2	0.28	3.50	4.9
14	2.15	7.9	0.62	-110	26	0.52	0.33	3.95	3.8

Total Power Dissipation $P_{tot} = f(T_S; T_A)$

* package mounted on alumina

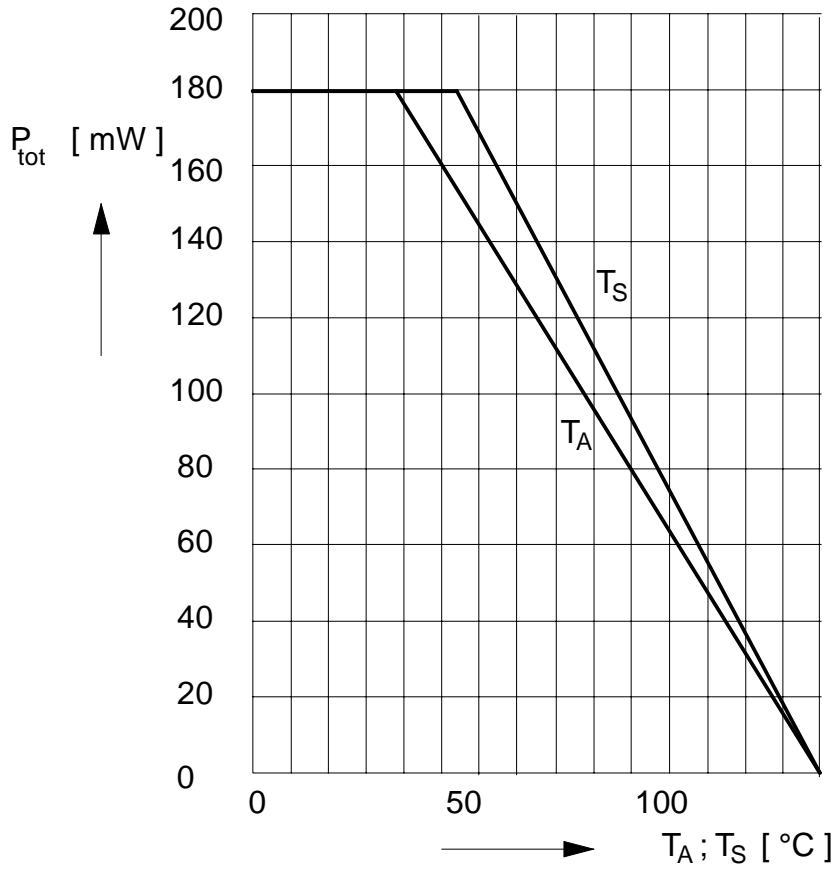

Typical Common Source S-Parameters

$$I_D = 10 \text{ mA} \quad V_{DS} = 2.5 \text{ V} \quad Z_0 = 50 \Omega$$

f	S11		S21		S12		S22	
	Mag	Ang	Mag	Ang	Mag	Ang	Mag	Ang
0.5	0.99	-9.3	2.930	170.9	0.014	82.6	0.76	-6.1
1.0	0.98	-19.1	2.938	161.8	0.026	75.9	0.76	-12.6
1.5	0.97	-29.2	2.948	152.4	0.039	67.8	0.75	-19.4
2.0	0.95	-39.8	2.936	142.7	0.051	60.3	0.73	-26.5
2.5	0.93	-50.5	2.904	133.0	0.062	52.7	0.71	-33.5
3.0	0.91	-60.8	2.859	123.7	0.072	45.7	0.69	-40.0
3.5	0.89	-70.9	2.818	114.8	0.082	39.0	0.67	-46.2
4.0	0.87	-81.2	2.791	105.9	0.090	32.6	0.64	-52.5
4.5	0.85	-91.9	2.770	96.7	0.098	26.1	0.61	-59.1
5.0	0.82	-103.2	2.736	87.1	0.104	18.9	0.58	-66.5
5.5	0.79	-114.9	2.672	77.4	0.108	11.8	0.54	-74.6
6.0	0.77	-126.2	2.586	68.0	0.111	5.3	0.51	-83.0
6.5	0.75	-136.8	2.489	59.0	0.111	-0.9	0.48	-91.6
7.0	0.74	-146.7	2.392	50.4	0.110	-6.5	0.46	-100.0
7.5	0.73	-155.7	2.299	42.1	0.108	-11.3	0.45	-107.8
8.0	0.72	-164.1	2.211	34.2	0.106	-15.5	0.44	-114.9
8.5	0.71	-172.1	2.133	26.7	0.104	-19.1	0.42	-121.7
9.0	0.70	180.0	2.065	19.3	0.101	-22.4	0.41	-128.8
9.5	0.70	172.1	2.007	12.1	0.099	-25.2	0.39	-136.7
10.0	0.70	163.8	1.960	4.5	0.096	-27.3	0.37	-146.1
10.5	0.70	155.0	1.907	-3.6	0.094	-29.5	0.36	-157.2
11.0	0.70	146.3	1.837	-11.9	0.092	-31.7	0.36	-169.1
11.5	0.70	138.1	1.751	-19.8	0.088	-33.2	0.36	179.0
12.0	0.70	130.9	1.664	-26.9	0.085	-33.2	0.37	168.0
12.5	0.72	124.9	1.589	-33.5	0.084	-32.3	0.39	158.6
13.0	0.73	118.8	1.526	-40.2	0.085	-31.1	0.41	150.2
13.5	0.74	112.3	1.462	-47.1	0.086	-30.5	0.43	142.3
14.0	0.75	106.0	1.399	-54.0	0.089	-31.3	0.44	134.1
14.5	0.76	100.0	1.339	-60.7	0.093	-32.0	0.46	125.7
15.0	0.77	94.3	1.275	-67.1	0.096	-32.6	0.47	116.8
15.5	0.78	89.3	1.209	-73.2	0.099	-33.2	0.49	108.3
16.0	0.80	85.3	1.156	-78.7	0.103	-34.1	0.52	101.3
16.5	0.82	81.4	1.113	-84.3	0.107	-35.6	0.55	95.5
17.0	0.82	77.4	1.073	-90.1	0.114	-37.9	0.57	90.1
17.5	0.82	72.5	1.036	-96.0	0.120	-40.6	0.58	84.1
18.0	0.82	69.9	1.010	-99.4	0.129	-41.2	0.58	80.3



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.