
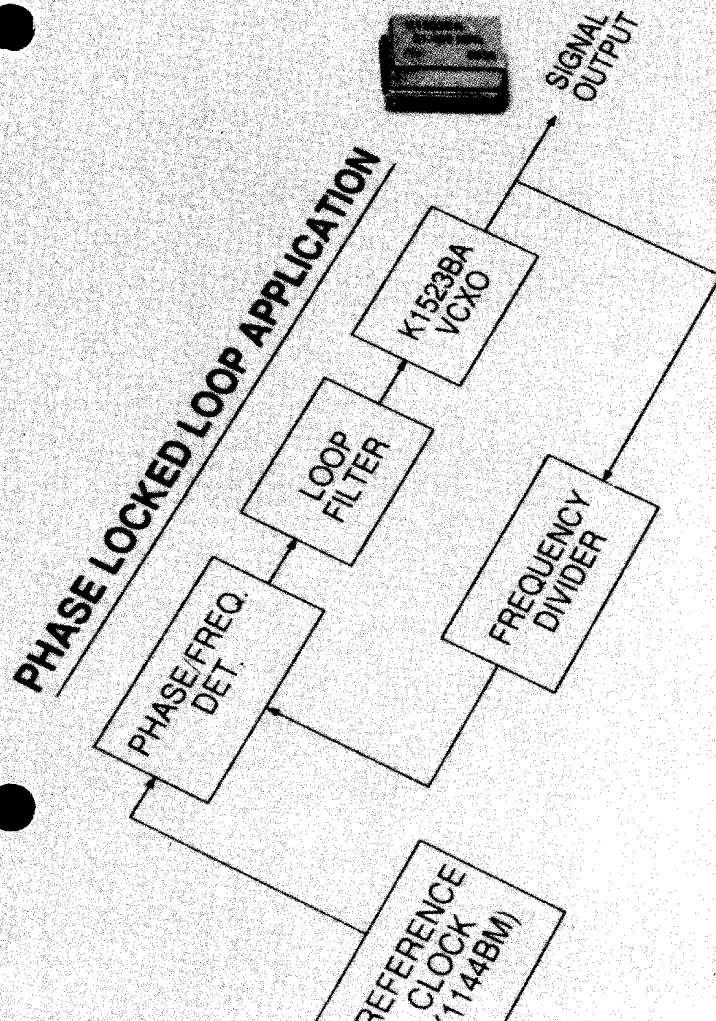


# K1523BA

## Voltage Controlled Crystal Oscillator

- Frequency Range 2.0 MHz to 35.0 MHz
- Frequency Stability of  $\pm 25$  PPM
- TTL/CMOS Compatible
- Sensitivity: +50 to +75 PPM/Volt  $\leq 25$  MHz  
+50 to +95 PPM/Volt  $\leq 35$  MHz
- Linearity:  $\pm 5\%$  max  $\leq 25$  MHz  
 $\pm 10\%$  max  $\leq 35$  MHz
- 14-Pin DIP Resistance-Welded Case

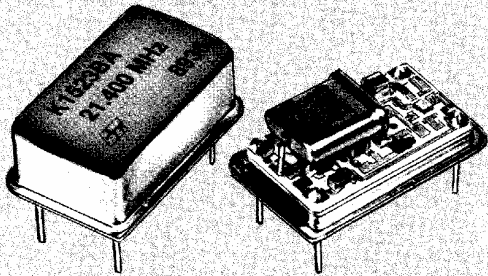

**Applications**—The K1523BA Voltage Controlled Crystal Oscillator allows the system designer to phase lock to a reference standard to correct for frequency errors between different timing signals in his system. VCXOs are predominantly used in local area networks or in any other form of computer-shared management system as well as in all phase locked loop applications for communications equipment and analog/digital interface.

**Deviation**—The K1523BA offers a minimum frequency control deviation of  $\pm 100$  ppm/V, operating from a nominal modulation voltage of 2.5V dc over a modulation range of 0.5V dc to 4.5V dc, while maintaining monotonic linearity specification of less than  $\pm 5\%$  for frequencies under 25 MHz and less than  $\pm 10\%$  for frequencies above 25 MHz.

**TTL/CMOS Output**—Operating from a supply voltage of +5V dc, the K1523BA Voltage Controlled Crystal Oscillator drives standard TTL/CMOS logic.

**High Density Packaging** — The cost-effective combination of hybrid and discrete component technologies gives the K1523BA optimum performance in a 14-pin DIP package measuring only .820" x .520" with .335" seated height. This allows the designer to achieve considerable reduction in size and helps solve space limitation problems.

**Maximum Reliability**—The K1523BA uses a custom integrated circuit and a hermetically-sealed, resistance welded quartz crystal, combined with proprietary thick-film hybrid techniques to obtain an oscillator design with reduced parts count while providing uniform high quality and field reliability.

**Volume Production**—Modern, automated production techniques are used to provide and assure volume production capability.

**FREQUENCY RANGE:** 2.0 MHz TO 35 MHz

**FREQUENCY STABILITY:**

±0.0025% (0°C to +70°C)

±0.0050% (-40°C to +85°C)

(Inclusive of calibration tolerance at 25°C, operating temperature range, supply input voltage change, load change, aging, shock, and vibration, with control voltage = 2.5V dc)

**TEMPERATURE RANGE:**

**OPERATING:** 0°C to +70°C (25 ppm)

-40°C to +85°C (50 ppm)

**STORAGE:** -55°C to +125°C

**PHASE JITTER:** <100 ps

**SUPPLY VOLTAGE:** +5V dc ±5%

**SUPPLY CURRENT:** (CL = 15 pF)

**INPUT:** ≤10 MHz: 13 mA

≤20 MHz: 17 mA

≤25 MHz: 19 mA

≤35 MHz: 26 mA

**OUTPUT**

**SHORTED (1 sec. max):** -30 mA min., -140 mA max.

**OUTPUT:**

**SYMMETRY:** 45/55% @ CMOS/TTL levels (<16.0 MHz)

40/60% @ CMOS/TTL levels (16.0 - 35.0MHz)

**TR & TF (max):** TR TF (CL=15 pF)

CMOS (20 to 80% Vdd) 5 ns 5 ns

TTL (0.5V to 2.5V dc) 4 ns 4 ns

**LOAD:** 10 TTL gates, CMOS compatible

**START UP TIME:** <10 ms max.

**FREQUENCY CONTROL:**

**CONTROL VOLTAGE:** 0.5V — 2.5V — 4.5V dc

**DEVIATION:** ±100ppm min. ±150 ppm max. ≤25 MHz

±100ppm min. ±190 ppm max. ≤35 MHz

**SENSITIVITY:** +50 to +75 ppm/V ≤25 MHz

+50 to +95 ppm/V ≤35 MHz

**LINEARITY:** <±5% at ≤25 MHz

≤±10% at ≤35 MHz

**INPUT IMPEDANCE:** ≥ 50K Ohms at ≤10 kHz

**MODULATION BW:** ≤20 kHz (-3dB, Vc = 2.5V)

**ENVIRONMENTAL;**

**TEMPERATURE**

**CYCLE:** MIL-STD-883B Method 1010.2 Level B

**SHOCK:** 5,000 G's 0.35 millise. 1/2 sine wave; 3 shocks each plane

**VIBRATION:** 10-55 Hz, .060" D.A., 55 Hz - 2000 Hz

35 G's. Duration time - 12 hours

85% Relative humidity @ +85°C, 500 hours

**HUMIDITY:**

**ELECTROSTATIC DISCHARGE SENSITIVITY:** MIL-STD-883B, Method 3015 Class B; >2 KV

**MECHANICAL:**

**GROSS LEAK TEST:**

Leak test in de-ionized H<sub>2</sub>O

**HERMETICALLY SEALED**

Mass spectrometer leak rate less than

2 x 10<sup>-9</sup> atmos. CC/sec of helium

20 lbs max. force perpendicular to top and bottom

**STRENGTH:** Pins will withstand maximum bend of 90°

reference to base for 2 bends

**MARKING INK:** Epoxy, heat cured

**SOLVENT:** Isopropyl alcohol, Trichloroethane, Freon TMC


**RESISTANCE:** No marking or seal destruction, dipped in solvent 1 minute @ +25°C ±5°C

Note (1): Unit can be cleaned by only one type solvent listed.

Note (2): Ultrasonic degreaser not to be used.

# K1523BA VCXO Specifications


Product covered by U.S. Patent No. 4,710,730

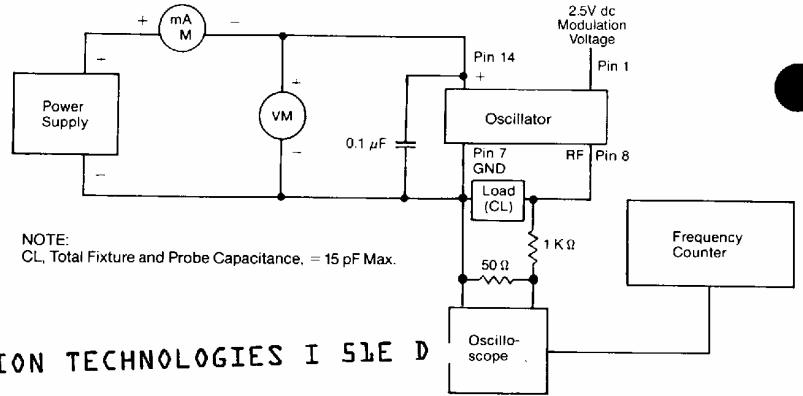

NOTE: CL, Total Fixture and Probe Capacitance. = 15 pF Max.

CHAMPION TECHNOLOGIES I SLE D

## TEST CIRCUIT DIAGRAM

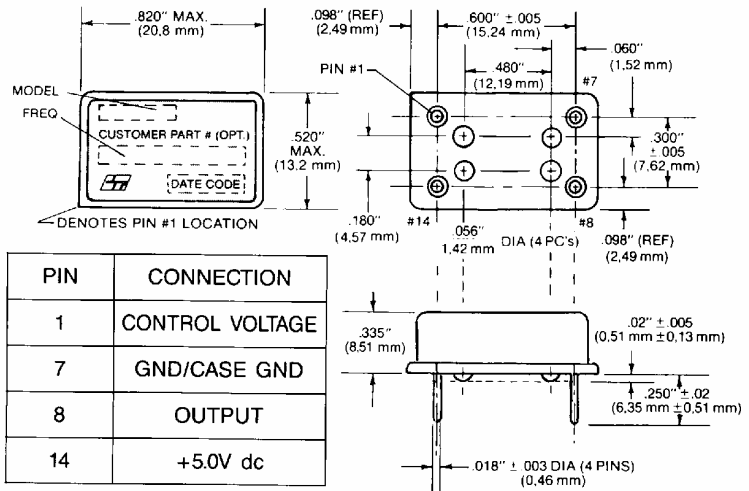

## Solderability Specifications

**MATERIALS:**

**SOLDER:** 60% tin and 40% lead

**FLUX:** Mildly activated rosin base type such as Alpha 611.

**PROCEDURE:**

**PREPARATION:** No wiping, cleaning, scraping, or abrading shall be performed on the leads.

**SOLDER BATH:** The solder bath shall be maintained at 265 ± 5°C.

**SOLDERABILITY:** Dip the terminals into room temperature flux, to a maximum of .020" from the unit base, for 5 to 10 seconds. Withdraw from the flux and dip the terminals to the same depth in the molten solder from 5 to 7 seconds. Flux residue may be removed with Freon rinse, or with soft swab moistened with isopropyl alcohol or Freon.

**REQUIREMENTS:**

**EVALUATION:** All leads must exhibit a minimum of 90% continuous solder coating over their entire length beyond .020" from the unit base. Pin-holes or voids may not be concentrated in any one area and are not to exceed 10% of the total area under examination.



2553 N. Edgington Street  
Franklin Park, IL 60131 U.S.A.  
708/451-1000 FAX: 708/451-7585  
EasyLink: 62931824 Telex: 499-0104 CTI UD

Specifications subject to change without notice.  
Champion and K1523 are trademarks of Champion Technologies, Inc. © 1989 by Champion Technologies, Inc.

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.