

# GP1S05 Wide Gap, High Sensing Accuracy Type Photointerrupter

## ■ Features


1. High sensing accuracy (Slit width : 0.5mm)
2. Gap between LED and detector : 5mm
3. High speed response ( $t_r$  : TYP.  $3\mu s$  at  $R_L=100\Omega$ )
4. PWB direct mounting type package

## ■ Applications

1. Copiers, printers, facsimiles
2. VCRs, cassette decks
3. Optoelectronic switches, optoelectronic counters

## ■ Outline Dimensions

(Unit : mm)

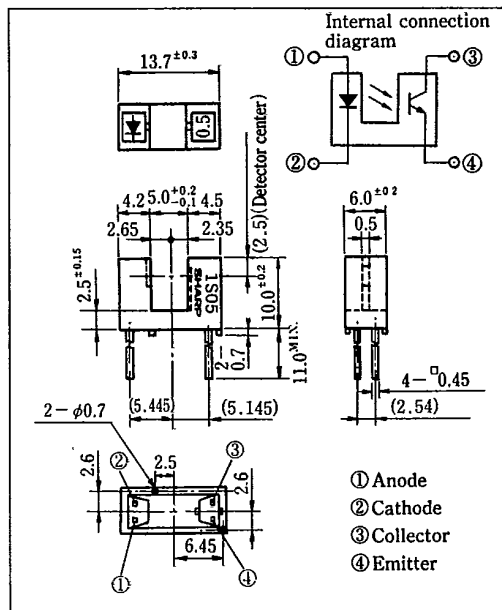

7

## ■ Absolute Maximum Ratings

(Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	*1 Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P$	75	mW
Output	Collector-emitter voltage	$V_{CEO}$	35	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	20	mA
	Collector power dissipation	$P_C$	75	mW
	Operating temperature	$T_{opr}$	-25 ~ +85	°C
	Storage temperature	$T_{stg}$	-40 ~ +100	°C
	*2 Soldering temperature	$T_{sol}$	260	°C

\*1 Pulse width  $\leq 100\mu s$ , Duty ratio = 0.01

\*2 For 5 seconds

Electro-optical Characteristics

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$V_F$	$I_F=20\text{mA}$	—	1.2	1.4	V
	Peak forward voltage	$V_{FM}$	$I_{FM}=0.5\text{A}$	—	3.0	4.0	V
	Reverse current	$I_R$	$V_R=3\text{V}$	—	—	10	$\mu\text{A}$
Output	Collector dark current	$I_{CEO}$	$V_{CE}=20\text{V}$	—	$10^{-9}$	$10^{-7}$	A
	Current transfer ratio	CTR	$I_F=20\text{mA}, V_{CE}=5\text{V}$	2.5	—	75	%
Transfer characteristics	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=40\text{mA}, I_C=0.2\text{mA}$	—	—	0.4	V
	Response time (Rise)	$t_r$	$I_C=2\text{mA}, V_{CE}=2\text{V}, R_L=100\Omega$	—	3	15	$\mu\text{s}$
	Response time (Fall)	$t_f$		—	4	20	$\mu\text{s}$

Fig. 1 Forward Current vs. Ambient Temperature

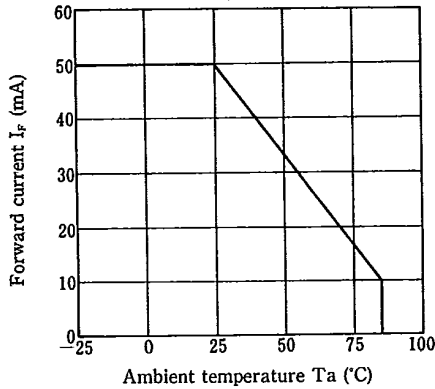


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

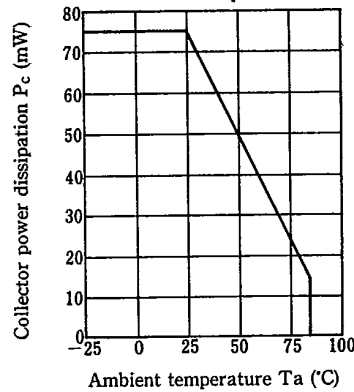


Fig. 3 Peak Forward Current vs. Duty Ratio



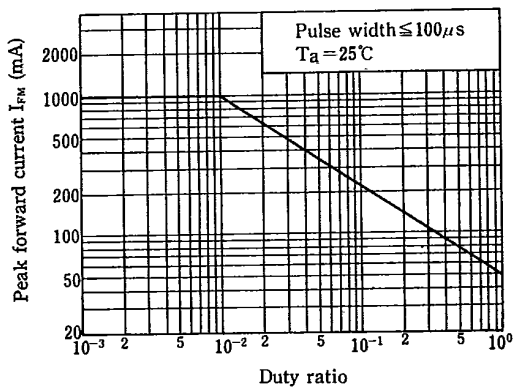



Fig. 4 Forward Current vs. Forward Voltage

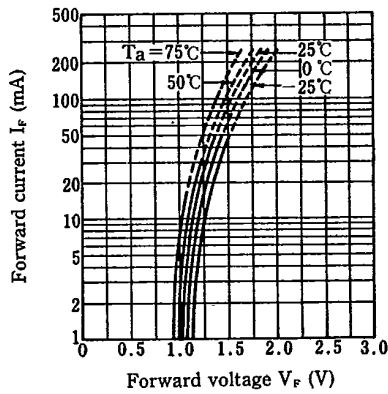


**Fig. 5 Collector Current vs. Forward Current**

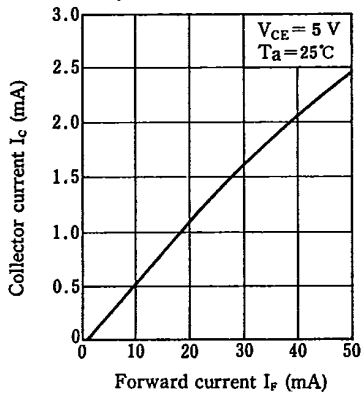


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

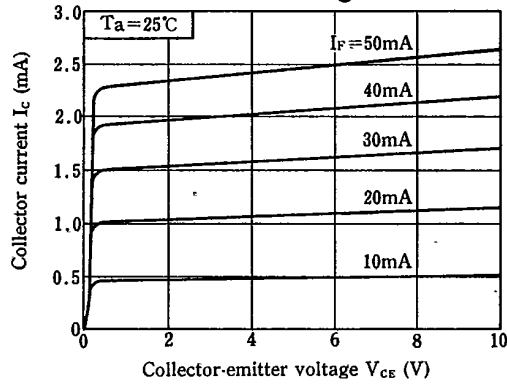


**Fig. 7 Collector Current vs. Ambient Temperature**

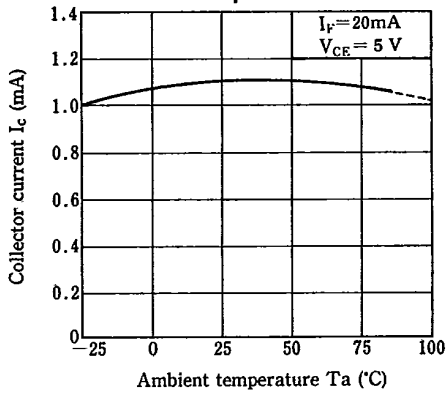

**Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

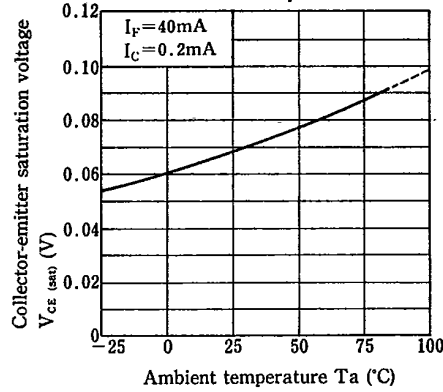

**Fig. 9 Response Time vs. Load Resistance**

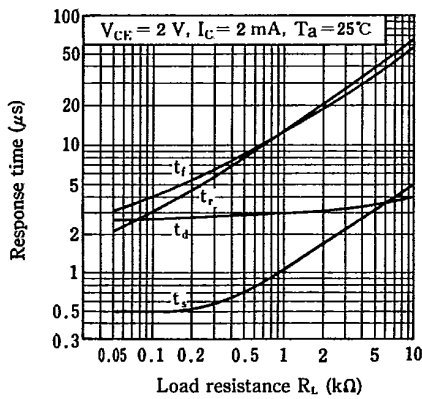

**Test Circuit for Response Time**

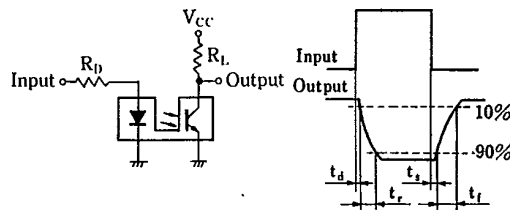


Fig. 10 Frequency Response

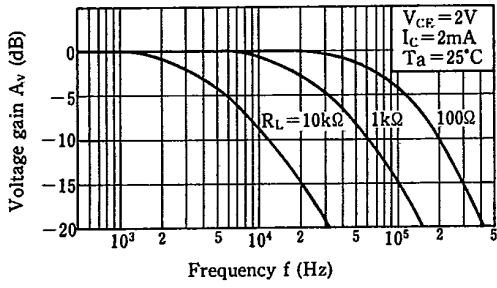


Fig. 11 Collector Dark Current vs. Ambient Temperature

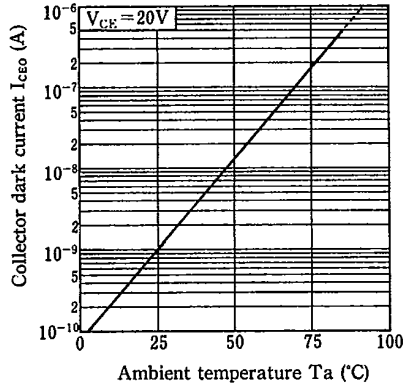


Fig. 12 Relative Collector Current vs. Shield Distance (1)


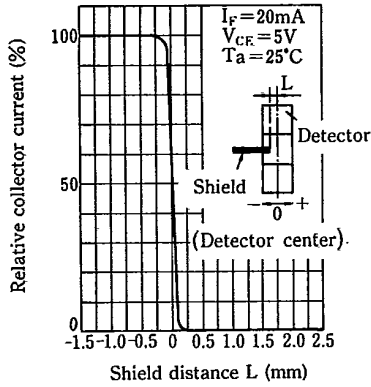


Fig. 13 Relative Collector Current vs. Shield Distance (2)

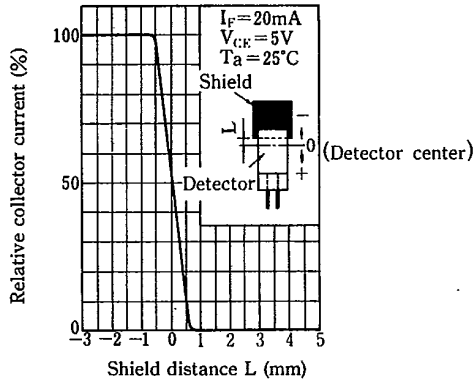

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.