

FG/CTL amplifier

BA6305/BA6305F

The BA6305 and BA6305F are fast-response wave-shaping preamplifiers for use in VCR CTL amplifiers. They meet the fast REC mode to PB mode response required in VCR CTL amplifiers. The ICs contain a fast-response preamplifier (with precharge function) and a noise-rejecting hysteresis amplifier that converts the CTL signal to a rectangular-wave output. The hysteresis width can be switched between two levels to maintain the S/N ratio, and provide compatibility with various tape speeds.


●Applications

- VCR CTL amplifiers
- VCR FG amplifiers
- VCR DTP amplifiers
- Other preamplifier and hysteresis amplifier applications

●Features

- 1)Fast response from strong input when recording to CTL signal playback when playing.
- 2)High gain.
- 3)Schmitt trigger circuit ensures high S/N ratio, and accurate hysteresis width and level.
- 4)The hysteresis comparator level can be switched to suit the CTL amplifier level.
- 5)Compact SIP 8 pin and SOP 8pin packages.

●Block diagram

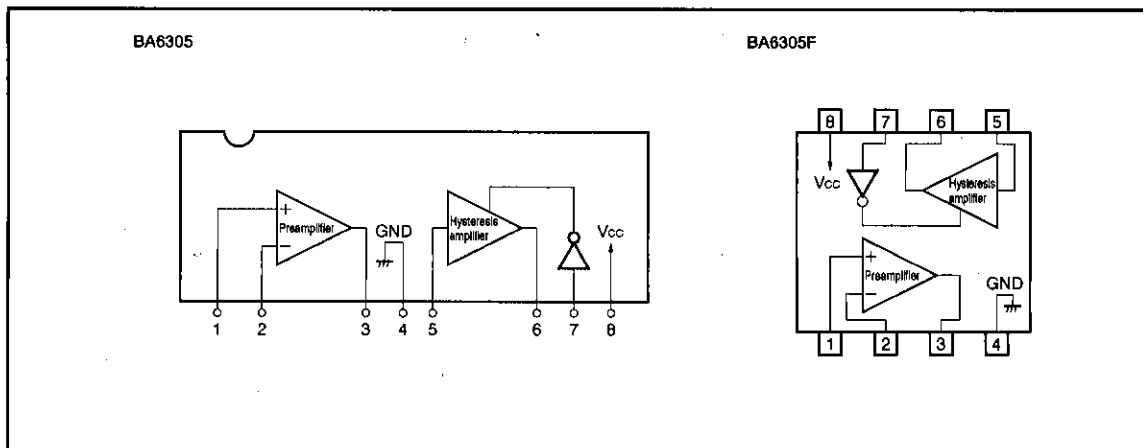

● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{CC}	15	V
Power dissipation	P _d	400 *	mW
Operating temperature	T _{opr}	-20~70	°C
Storage temperature	T _{stg}	-55~125	°C


* Reduced by 4.0mW for each increase in Ta of 1°C over 25°C.

● Electrical characteristics (Unless otherwise specified Ta=25°C and V_{CC}=9V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Operating voltage	V _{CC}	4.5	—	13.0	V	—
Quiescent current	I _Q	0.6	1.5	2.6	mA	—
Preamplifier bias voltage	V _{B pre}	1.0	1.3	1.6	V	—
Small-signal preamplifier input resistance	R _{INS}	20	30	40	kΩ	V _{IN} =1.0V
Large-signal preamplifier input resistance	R _{EN}	2.1	4.4	9.0	kΩ	V _{IN} =5.0V
Preamplifier bias input current	I _{B pre}	—	30	300	nA	—
Preamplifier output level	V _{O pre}	2.0	2.4	—	V _{pp}	—
Preamplifier open-loop voltage gain	G _{VO}	64.0	72.5	—	dB	R _{NF} =330kΩ
Preamplifier input conversion noise voltage	V _{N pre}	—	3.4	12.0	μV _{rms}	DIN Audio R _θ =2.2kΩ
Schmitt circuit input bias potential	V _{B hys}	1.6	2.0	2.4	V	—
Schmitt circuit hysteresis width I	V _{hys I}	±70	±90	±130	mV _{o-p}	—
Schmitt circuit hysteresis width II	V _{hys II}	±200	±250	±360	mV _{o-p}	—
Schmitt circuit output level	V _{ohys}	5.1	6.6	—	V _{pp}	R _L =20kΩ

The switching time from REC mode to PB mode is 1 sec. (Max.), and the power on start up time is 3 sec. (Max.).

● External dimensions (Units: mm)

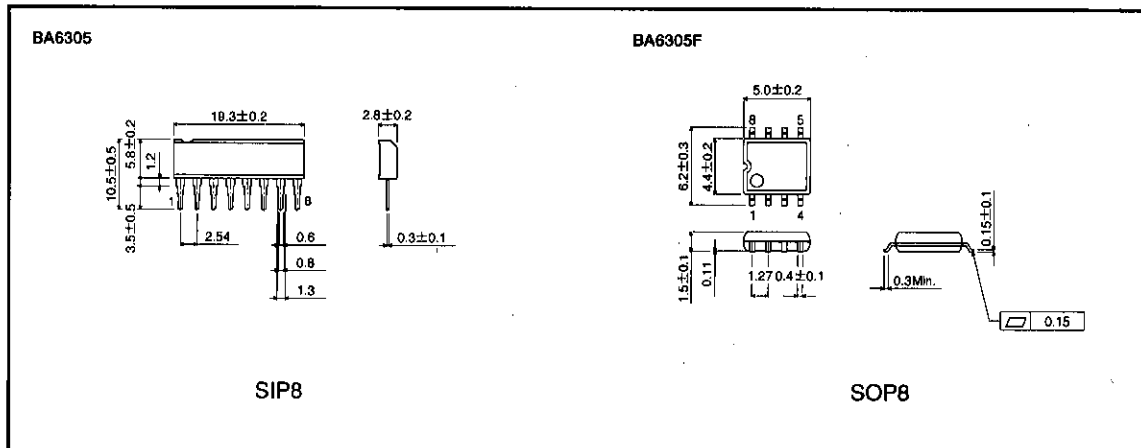

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.