

T-41-73

# GP2L04/GP2L06 /GP2L09

## Subminiature, High Sensitivity Photointerrupter

### ■ Features


1. Compact and thin  
GP2L04: Compact DIP type  
GP2L06: Flat lead type  
GP2L09: Compact DIP, long lead type
2. Optimal detection distance: 0.8~1mm
3. High sensitivity  
( $I_c$ : MIN. 0.5mA at  $I_F = 4mA$ )
4. Visible light cut-off type

### ■ Applications

1. Cassette tape recorders, VCRs
2. Floppy disk drives
3. Various microcomputerized control equipment

### ■ Outline Dimensions

(Unit : mm)

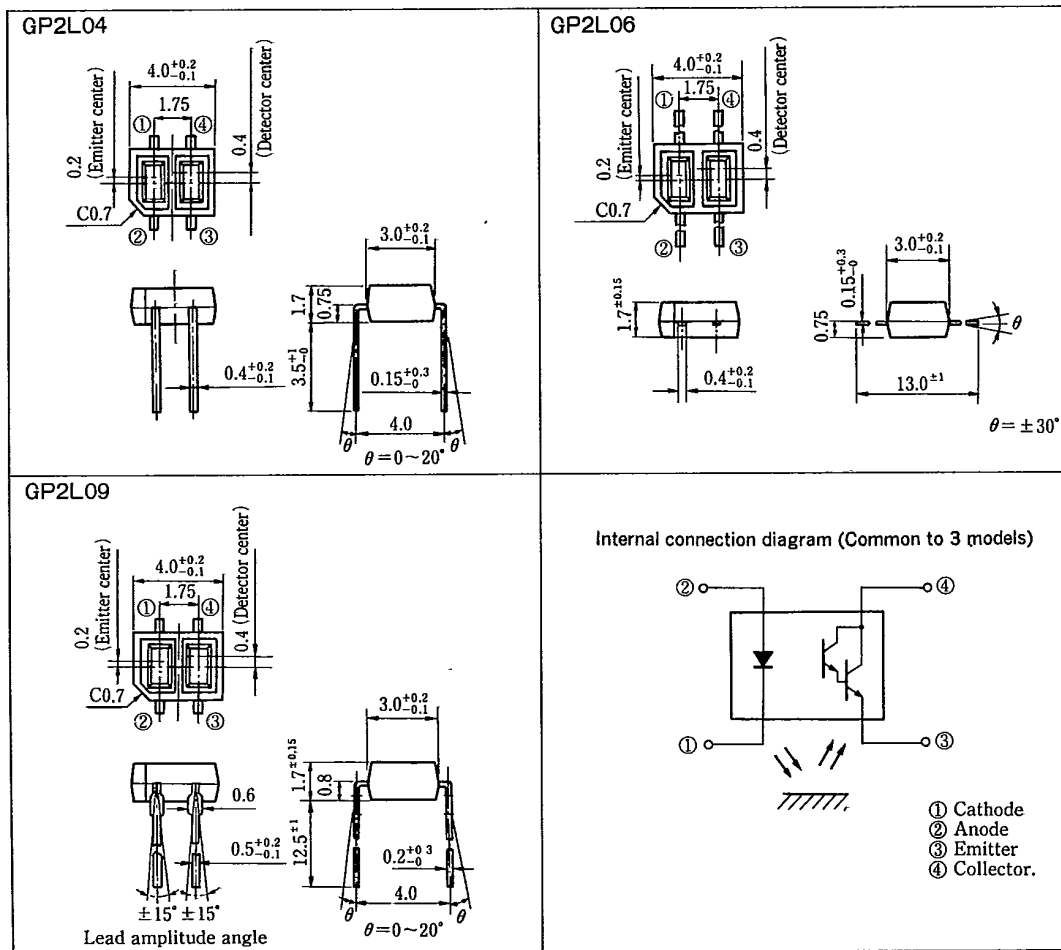

T-41-73


■ Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P_D$	75	mW
Output	Collector-emitter voltage	$V_{CE0}$	35	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	50	mA
	Collector power dissipation	$P_C$	75	mW
	Total power dissipation	$P_{tot}$	100	mW
Operating temperature		$T_{opr}$	-25 ~ +85	°C
Storage temperature		$T_{stg}$	-40 ~ +100	°C
*1 Soldering temperature		$T_{sol}$	260	°C

\*1 Within 5 seconds (Soldering areas are shown below.)


GP2L04, GP2L09

Soldering area  
 The hatched area more than 1mm\*2  
 away from the lower edge of  
 package as shown in the drawing  
 below.



GP2L06

Soldering area  
 The hatched area more than 2.0mm away  
 from the both edges of package as  
 shown in the drawing below.



■ Electro-optical Characteristics (Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$V_F$	$I_F=20mA$	—	1.2	1.4	V
	Reverse current	$I_R$	$V_R=6V$	—	—	10	$\mu A$
Output	Collector dark current	$I_{CE0}$	$V_{CE}=10V, I_F=0$	—	—	$1 \times 10^{-6}$	A
Transfer characteristics	*3 Collector current	$I_C$	$V_{CE}=2V, I_F=4mA$	0.5	3.0	15.0	mA
	Response time (Rise)	$t_r$	$V_{CE}=2V, I_C=10mA$	—	80	400	$\mu s$
	Response time (Fall)	$t_f$	$R_L=100\Omega$	—	70	400	$\mu$
	**Leak current	$I_{LEAK}$	$I_F=4mA, V_{CE}=5V$	—	—	5.0	$\mu A$

\*3 The condition and arrangement of the reflective object are shown in the right drawing.


\*4 Without reflective object

Rank	$I_C$ (mA)	Rank mark
A	0.5~1.9	A
B	1.45~5.4	B
C	4.0~15.0	C
AB	0.5~5.4	A or B
BC	1.45~15.0	B or C
ABC	0.5~15.0	A, B or C

Marking Example  
 GP2L04




Test Condition and Arrangement  
 for Collector Current




T-41-73


**Fig. 1 Forward Current vs. Ambient Temperature**

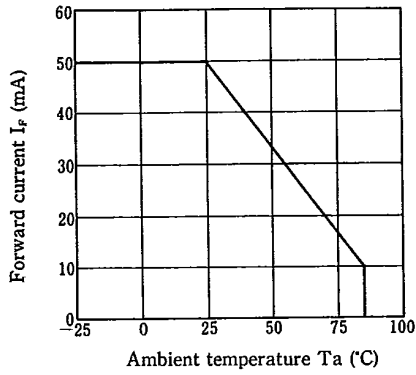


**Fig. 2 Power Dissipation vs. Ambient Temperature**

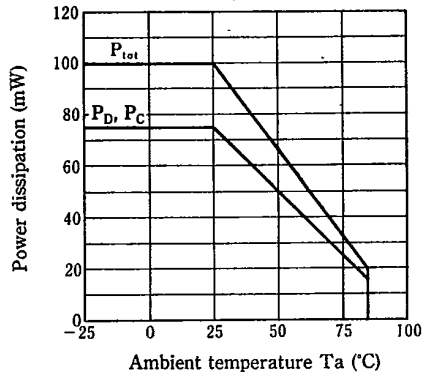


**Fig. 3 Peak Forward Current vs. Duty Ratio**

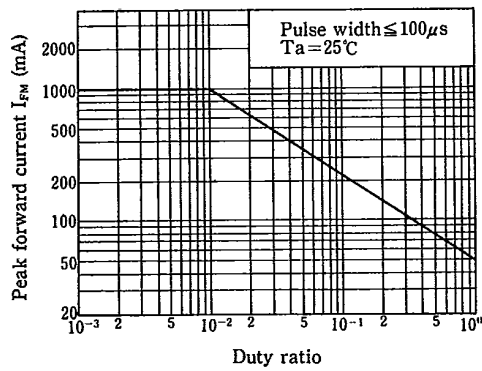

**Fig. 4 Forward Current vs. Forward Voltage**

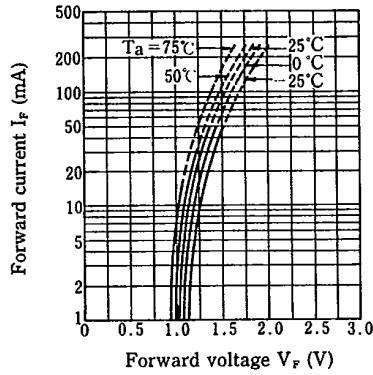

**Fig. 5 Collector Current vs. Forward Current**

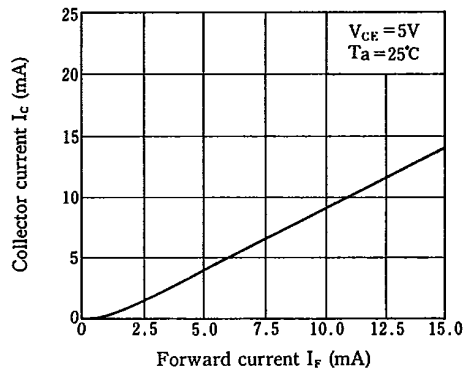

**Fig. 6 Collector Current vs. Collector-emitter Voltage**

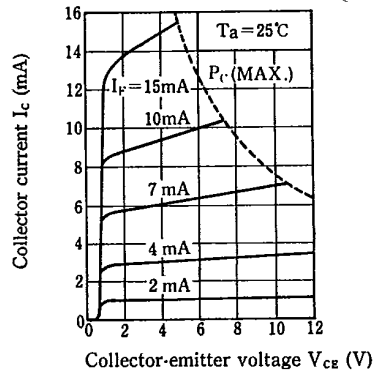


Fig. 7 Relative Collector Current vs. Ambient Temperature

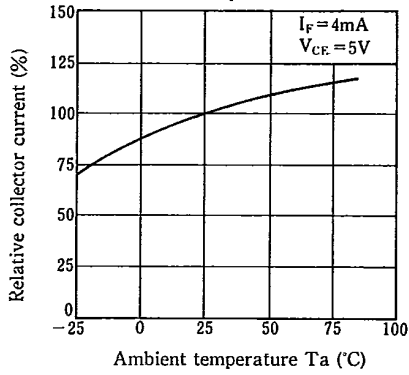


Fig. 8 Collector Dark Current vs. Ambient Temperature


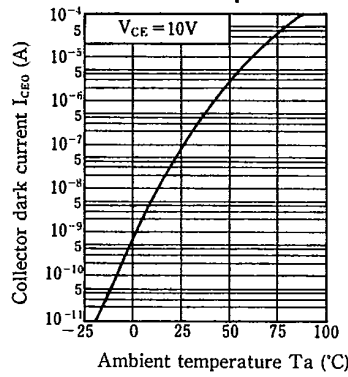


Fig. 9 Response Time vs. Load Resistance

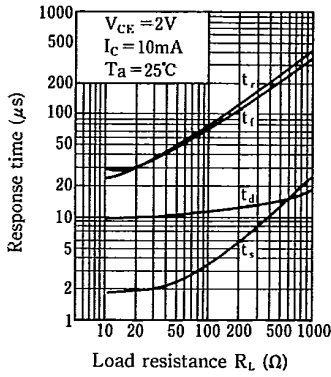

Test Circuit for Response Time

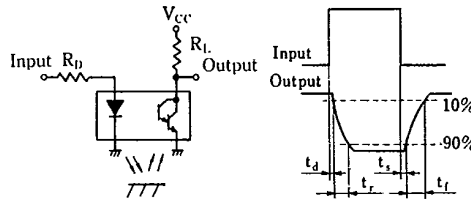


Fig. 10 Relative Collector Current vs. Distance between GP2L04 and Card


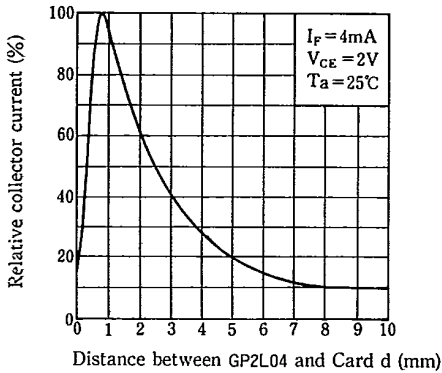


Fig. 11 Relative Collector Current vs. Card Moving Distance (1)

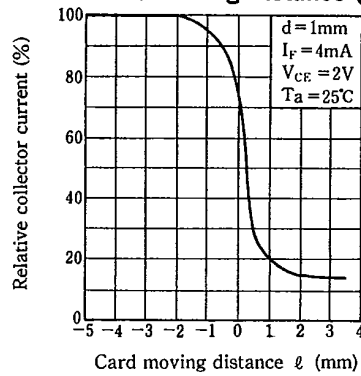

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.