


Contactless Potentiometer

Version 2.0

FP 312 L 100

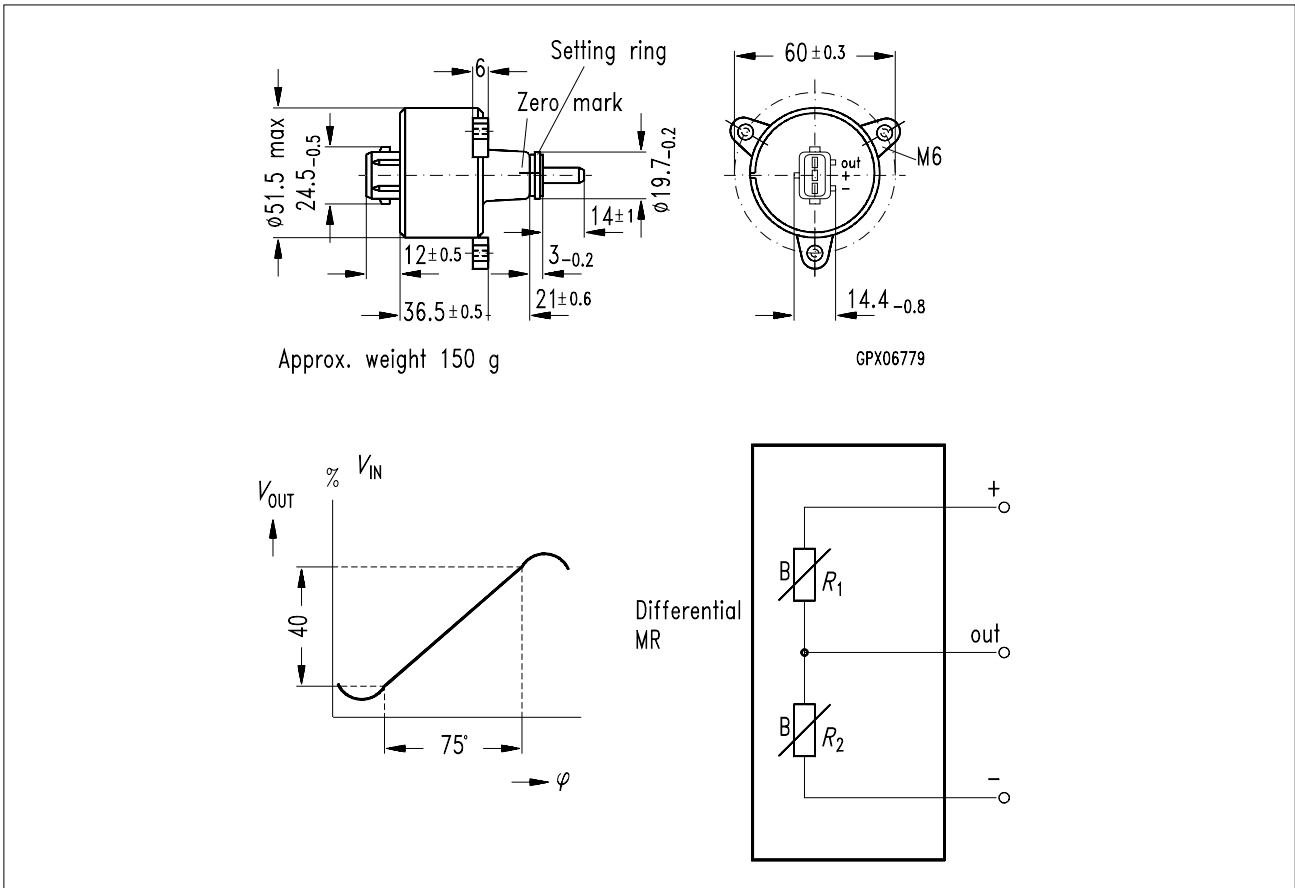

Dimensions in mm

Features

- Devoid of friction and abrasion at contact point
- No electrical contact noise
- Insensitive to contamination, moisture ingress, corrosion and vibration
- Low operating torque
- Long lifetime

Typical Applications

- Angular encoder
- Electric vehicles

Type	Ordering Code
FP 312 L 100	Q65312-L100-U

This potentiometer comprises differential MR, driven by a magnet with no amplifier. At the output, the resistance change can be used as a signal. On applying the operating voltage a sinusoidal voltage results at the output, which is not temperature-compensated. With the aid of external circuitry this signal can be amplified, temperature-compensated and adapted for various applications.

Absolute Maximum Ratings

Parameter	Symbol	Limit Values	Unit
Operating temperature	T_A	- 25 / + 70	°C
Supply voltage	V_{IN}	8	V
Supply current	I_{IN}	30	mA

Electrical Characteristics ($T_A = 25\text{ °C}$)

Linear angle of rotation	Φ	75	deg.
Output signal for corresponding angle of rotation	V_{OUT}	approx. 40	% of V_{IN}
Total resistance	R_{tot}	approx. 850	Ω
Load resistance	R_L	> 50	k Ω
Temperature error in range - 25 °C...+ 70 °C	-	non-compensated	-
Linearity	F_L	$\leq \pm 2.5$	% of V_{OUT}
Hysteresis	-	$\leq \pm 1$	% of V_{OUT}

Mechanical Ratings

Required torque	M_d	0.2 typ.	Ncm
Max. perm. compressive axial force	$F_{a\text{ compr.}}$	10	N
Max. perm. tensile axial force	$F_{a\text{ tens}}$	3	N
Max. perm. radial force	F_r	10	N
Max. perm. speed	n	3000	min ⁻¹
Cycles (life)	L	10 ⁸	-



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.