

54/74150


16-INPUT MULTIPLEXER

DESCRIPTION — Signals applied to the Select ($S_0 - S_3$) inputs determine which of the data inputs ($I_0 - I_{15}$) is routed through to the output. Data from the selected input appears at the output (Z) in inverted form. When the active-LOW Enable input is HIGH, the output will be HIGH, regardless of other input conditions.

ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		$V_{CC} = +5.0 \text{ V} \pm 5\%$, $T_A = 0^\circ\text{C to } +70^\circ\text{C}$	$V_{CC} = +5.0 \text{ V} \pm 10\%$, $T_A = -55^\circ\text{C to } +70^\circ\text{C}$	
Plastic DIP (P)	A	74150PC		9N
Ceramic DIP (D)	A	74150DC	54150DM	6N
Flatpak (F)	A	74150FC	54150FM	4M


CONNECTION DIAGRAM
PINOUT A

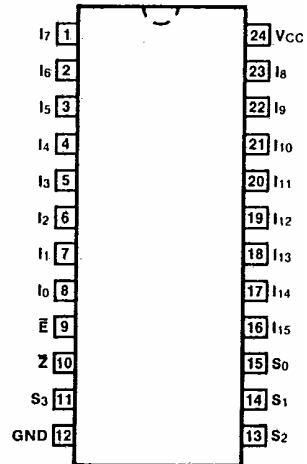

INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions


PIN NAMES	DESCRIPTION	54/74 (U.L.) HIGH/LOW
$I_0 - I_{15}$	Data Inputs	1.0/1.0
$S_0 - S_3$	Select Inputs	1.0/1.0
\bar{E}	Enable Input (Active LOW)	1.0/1.0
Z	Inverted Data Output	20/10

LOGIC SYMBOL

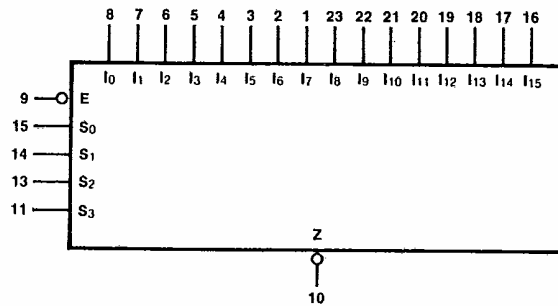

$V_{CC} = \text{Pin } 24$
 $GND = \text{Pin } 12$

LOGIC DIAGRAM

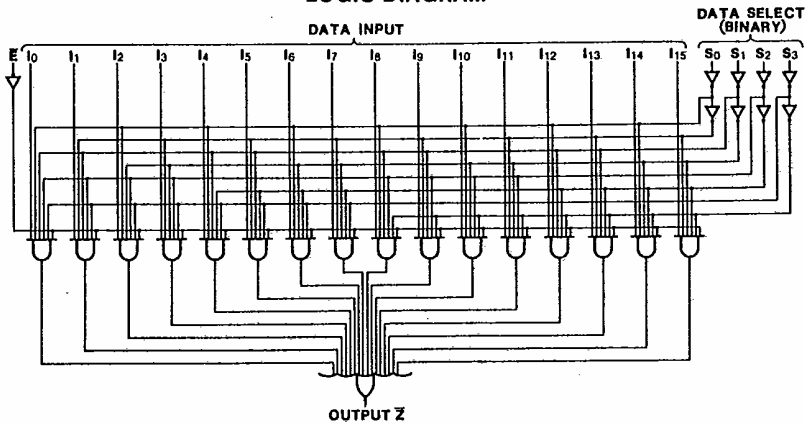

TRUTH TABLE

INPUTS					OUTPUT
S ₃	S ₂	S ₁	S ₀	E	Z
X	X	X	X	H	H
L	L	L	L	L	I ₀
L	L	L	H	L	I ₁
L	L	H	L	L	I ₂
.
H	H	L	L	L	I ₁₂
H	H	L	H	L	I ₁₃
H	H	H	L	L	I ₁₄
H	H	H	H	L	I ₁₅

H = HIGH Voltage Level
 L = LOW Voltage Level
 X = Immaterial

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER	54/74		UNITS	CONDITIONS
		Min	Max		
I _{os}	Output Short Circuit Current	XM	-20	mA	V _{CC} = Max
		XC	-18		
I _{CC}	Power Supply Current		68	mA	V _{CC} = Max, V _{IN} = 4.5V

AC CHARACTERISTICS: V_{CC} = +5.0 V, T_A = +25°C (See Section 3 for waveforms and load configurations)

SYMBOL	PARAMETER	54/74		UNITS	CONDITIONS
		C _L = 15 pF R _L = 400 Ω			
		Min	Max		
t _{PLH} t _{PHL}	Propagation Delay S _n to Z, 3 Levels		35 33	ns	Figs. 3-1, 3-20
t _{PLH} t _{PHL}	Propagation Delay I _n to Z		20 14	ns	Figs. 3-1, 3-4
t _{PLH} t _{PHL}	Propagation Delay E to Z		24 30	ns	Figs. 3-1, 3-5

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.

National Semiconductor was acquired by Texas Instruments.

http://www.ti.com/corp/docs/investor_relations/pr_09_23_2011_national_semiconductor.html

This file is the datasheet for the following electronic components:

74150 - <http://www.ti.com/product/74150?HQS=TI-null-null-dscatalog-df-pf-null-wwe>



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.