


SIEMENS

**SURFACE MOUNT
LEAD BEND OPTIONS**

F-91-30

**-004
-009**

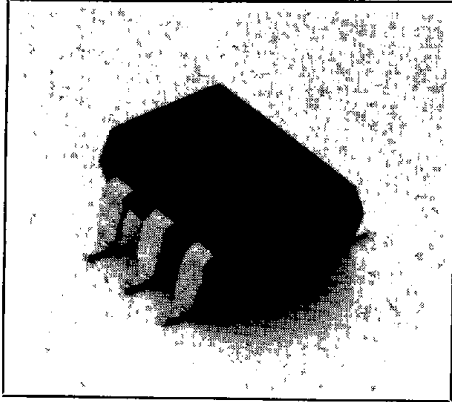

The entire optocoupler line is available with a lead bend for surface mounting.

FEATURES

- **Surface Mountable**
- **Available for all 4, 6, 8 & 16 Pin Plastic Packages with 0.1" Lead Spacing**
- **All Electrical Parameters Remain Unchanged from Standard Packages**
- **Two Stand-off Heights (.004" and .009")**

ORDERING INFORMATION

To order any standard optocoupler with a surface mount lead bend, add -004 or -009 to the standard part number.

Example:
Standard part number: ILD1
Surface Mount: ILD1-004 or ILD1-009

Dimensions in inches (mm)

Standard Packages (0.1" lead spacing)

4-pin

8-pin

6-pin

16-pin

Dimensions: A, B, 330 REF (8.38), .020 (51) / .040 (1.02), .012 TYP (30), 15° MAX

Version	-004		-009	
	Min.	Max.	Min.	Max.
A	(.947) 373	(.998) 393	(.953) 375	(1.003) 395
B	(.013) 0005	(.102) .0040	(.102) 0040	(.249) 0098

All other package dimensions remain unchanged

Optocouplers
(Optoisolators)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.