


Sound processor for car audio

BD3801FS

Description

The BD3801FS is a sound processor IC for car audio applications. High S/N and low distortion parametric equalizer can be constructed without external capacitor by high-performance switched capacitor filter technology. Soft switch can reduce pop noise at switching volume.

Dimension(Units: mm)

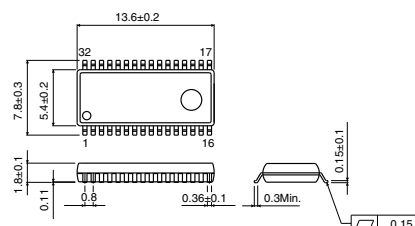

Features

- 1) Slice the external parts by using switched capacitor circuit.
- 2) Reduce the noise of through mode by using tone-pass route. (8 μ Vrms)
- 3) Possible to realize parametric equalizer using 3 band tone, and 2 band tone and loudness.
- 4) Built-in ground isolation amplifier input, ideal for external stereo input and monaural input. (1 stereo input and 2 monaural input)
- 5) It is using a I²C BUS control. Because it is possible to use at the same time in a maximum of two.
- 6) BiCMOS process is suitable for the design of low current (Typ.10mA) and low energy.

SSOP-A32

Applications

Car stereo, Mini component stereo, Micro component stereo, DVD, Personal computer, TV.

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Maximum applied voltage	Vcc	10.0	V
Power dissipation	Pd	950 *	mW
Operating temperature range	Topr	-40 ~ +85	°C
Storage temperature range	Tstg	-55 ~ +150	°C

* Derating : 7.6mW/°C for operation above Ta=25°C PCB (70mm 70mm 1.6mm glass epoxy board)

Notes: I²C BUS is a trademark of PHILIPS Incorporated.


Recommended Operating Conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	Vcc	7.0	-	9.5	V


Electrical characteristics (Unless otherwise noted; Ta=25°C, Vcc=9V, f=1kHz, VIN=Vrms, Rg=600 , Input gain 0dB, Volume 0dB, Tone 0dB, Fader 0dB)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current at no signal	IQ	-	10	30	mA	VIN=0 μ Vrms
Voltage gain	GV	-1.5	0	1.5	dB	
Channel balance	CB	-1.5	0	1.5	dB	CB=GV1-GV2
Total harmonic distortion rate	THD	-	0.01	0.1	%	VOUT=1Vrms, BW=400-30kHz
Output noise voltage	VND	-	8	26	μ Vrms	Rg=0 , BW=IHF-A
Residual noise voltage	VNCR	-	2	10	μ Vrms	Volume & Fader=- dB, Rg=0 , BW=IHF-A
Cross talk between channels	CTC	-	-90	-80	dB	Rg=0 , BW=IHF-A

Electrical characteristic curves

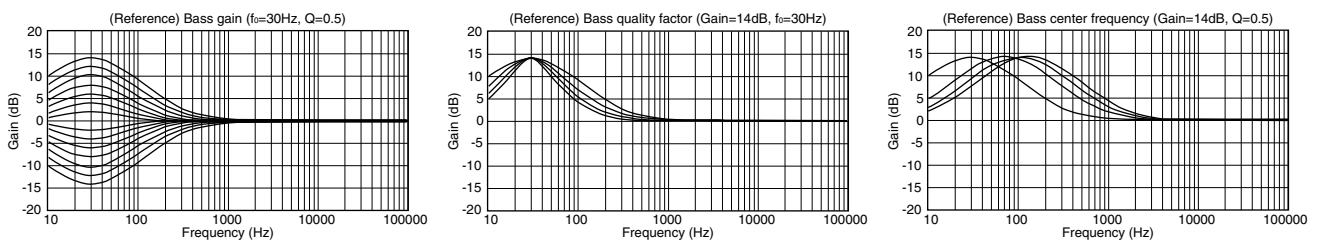

Application Circuit

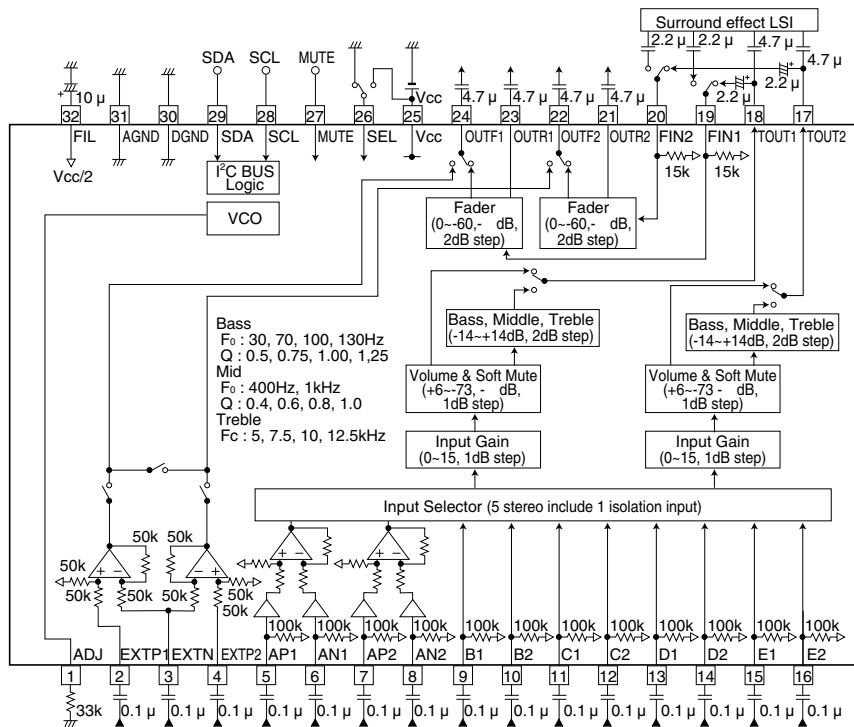



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.