

DATA SHEET

BGD502; BGD504 CATV power doubler amplifier modules

Product specification
Supersedes data of February 1994
File under Discrete Semiconductors, SC16

1995 Oct 25

CATV power doubler amplifier modules


BGD502; BGD504

FEATURES

- Excellent linearity
- Extremely low noise
- Silicon nitride passivation
- Rugged construction
- TiPtAu metallized crystals ensure optimal reliability.

PINNING - SOT115C

| PIN | DESCRIPTION |
|-----|-----------------|
| 1 | input |
| 2 | common |
| 3 | common |
| 5 | +V _B |
| 7 | common |
| 8 | common |
| 9 | output |

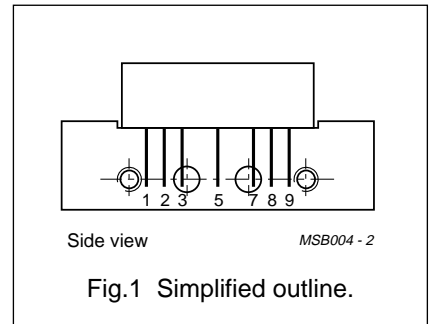

DESCRIPTION

Hybrid amplifier modules for CATV systems operating over a frequency range of 40 to 550 MHz at a voltage supply of 24 V (DC).

QUICK REFERENCE DATA

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|------------------|--------------------------------|-----------------------|------|------|------|
| G _p | power gain | f = 50 MHz | 18 | 19 | dB |
| | BGD502 | | | | |
| | BGD504 | 19.5 | 20.5 | dB | |
| | power gain | f = 550 MHz | 18.8 | 20.8 | dB |
| BGD502 | | | | | |
| BGD504 | 20.2 | 22.2 | dB | | |
| I _{tot} | total current consumption (DC) | V _B = 24 V | – | 435 | mA |

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | MIN. | MAX. | UNIT |
|------------------|-------------------------------------|------|------|------|
| V _i | RF input voltage | – | 60 | dBmV |
| T _{stg} | storage temperature | –40 | +100 | °C |
| T _{mb} | operating mounting base temperature | –20 | +100 | °C |

CATV power doubler amplifier modules

BGD502; BGD504

CHARACTERISTICSBandwidth 40 to 550 MHz; $V_B = 24$ V; $T_{mb} = 35$ °C; $Z_S = Z_L = 75$ Ω .

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|-----------|---|---|------|------|-----------|------|
| G_p | power gain BGD502 BGD504 | f = 50 MHz | 18 | – | 19 | dB |
| | | | 19.5 | – | 20.5 | dB |
| | power gain BGD502 BGD504 | f = 550 MHz | 18.8 | – | 20.8 | dB |
| | | | 20.2 | – | 22.2 | dB |
| SL | slope cable equivalent | f = 40 to 550 MHz | 0.2 | – | 2.2 | dB |
| FL | flatness of frequency response | f = 40 to 550 MHz | – | – | ± 0.3 | dB |
| S_{11} | input return losses | f = 40 to 80 MHz | 20 | – | – | dB |
| | | f = 80 to 160 MHz | 19 | – | – | dB |
| | | f = 160 to 550 MHz | 18 | – | – | dB |
| S_{22} | output return losses | f = 40 to 80 MHz | 20 | – | – | dB |
| | | f = 80 to 160 MHz | 19 | – | – | dB |
| | | f = 160 to 550 MHz | 18 | – | – | dB |
| S_{21} | phase response | f = 50 MHz | +135 | – | +225 | deg |
| CTB | composite triple beat BGD502 BGD504 | 77 channels flat; $V_o = 44$ dBmV; measured at 547.25 MHz | – | – | –65 | dB |
| | | | – | – | –64 | dB |
| X_{mod} | cross modulation BGD502 BGD504 | 77 channels flat; $V_o = 44$ dBmV; measured at 55.25 MHz | – | – | –68 | dB |
| | | | – | – | –67 | dB |
| CSO | composite second order distortion BGD502 BGD504 | 77 channels flat; $V_o = 44$ dBmV; measured at 548.5 MHz | – | – | –62 | dB |
| | | | – | – | –60 | dB |
| d_2 | second order distortion BGD502 BGD504 | note 1 | – | – | –72 | dB |
| | | | – | – | –70 | dB |
| V_o | output voltage BGD502 BGD504 | $d_{im} = -60$ dB; note 2 | 64 | – | – | dBmV |
| | | | 63.5 | – | – | dBmV |
| F | noise figure | f = 550 MHz | – | – | 8 | dB |
| I_{tot} | total current consumption (DC) | note 3 | – | 415 | 435 | mA |

Notes

- $f_p = 55.25$ MHz; $V_p = 44$ dBmV; $f_q = 493.25$ MHz; $V_q = 44$ dBmV; measured at $f_p + f_q = 548.5$ MHz.
- Measured according to DIN45004B: $f_p = 540.25$ MHz; $V_p = V_o$; $f_q = 547.25$ MHz; $V_q = V_o - 6$ dB; $f_r = 549.25$ MHz; $V_r = V_o - 6$ dB; measured at $f_p + f_q - f_r = 538.25$ MHz.
- The modules normally operate at $V_B = 24$ V, but are able to withstand supply transients up to 30 V.

CATV power doubler amplifier modules

BGD502; BGD504

CHARACTERISTICSBandwidth 40 to 450 MHz; $V_B = 24$ V; $T_{mb} = 35$ °C; $Z_S = Z_L = 75$ Ω .

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|-----------|---|---|------|------|-----------|------|
| G_p | power gain BGD502 BGD504 | f = 50 MHz | 18 | – | 19 | dB |
| | | | 19.5 | – | 20.5 | dB |
| | power gain BGD502 BGD504 | f = 450 MHz | 18.6 | – | 20.6 | dB |
| | | | 20 | – | 22 | dB |
| SL | slope cable equivalent BGD502 BGD504 | f = 40 to 450 MHz | 0.2 | – | 1.8 | dB |
| | | | 0 | – | 1.65 | dB |
| FL | flatness of frequency response | f = 40 to 450 MHz | – | – | ± 0.3 | dB |
| S_{11} | input return losses | f = 40 to 80 MHz | 20 | – | – | dB |
| | | f = 80 to 160 MHz | 19 | – | – | dB |
| | | f = 160 to 450 MHz | 18 | – | – | dB |
| S_{22} | output return losses | f = 40 to 80 MHz | 20 | – | – | dB |
| | | f = 80 to 160 MHz | 19 | – | – | dB |
| | | f = 160 to 450 MHz | 18 | – | – | dB |
| S_{21} | phase response | f = 50 MHz | +135 | – | +225 | deg |
| CTB | composite triple beat BGD502 BGD504 | 60 channels flat; $V_o = 46$ dBmV; measured at 445.25 MHz | – | – | –67 | dB |
| | | | – | – | –66 | dB |
| CSO | composite second order distortion BGD502 BGD504 | 60 channels flat; $V_o = 46$ dBmV; measured at 548.5 MHz | – | – | t.b.f. | dB |
| | | | – | – | t.b.f. | dB |
| X_{mod} | cross modulation BGD502 BGD504 | 60 channels flat; $V_o = 46$ dBmV; measured at 55.25 MHz | – | – | –67 | dB |
| | | | – | – | –66 | dB |
| d_2 | second order distortion BGD502 BGD504 | note 1 | – | – | –75 | dB |
| | | | – | – | –73 | dB |
| V_o | output voltage BGD502 BGD504 | $d_{im} = -60$ dB; note 2 | 67 | – | – | dBmV |
| | | | 66.5 | – | – | dBmV |
| F | noise figure | f = 450 MHz | – | – | 7 | dB |
| I_{tot} | total current consumption (DC) | note 3 | – | 415 | 435 | mA |

Notes

- $f_p = 55.25$ MHz; $V_p = 46$ dBmV; $f_q = 391.25$ MHz; $V_q = 46$ dBmV; measured at $f_p + f_q = 446.5$ MHz.
- Measured according to DIN45004B: $f_p = 440.25$ MHz; $V_p = V_o$; $f_q = 447.25$ MHz; $V_q = V_o - 6$ dB; $f_r = 449.25$ MHz; $V_r = V_o - 6$ dB; measured at $f_p + f_q - f_r = 438.25$ MHz.
- The modules normally operate at $V_B = 24$ V, but are able to withstand supply transients up to 30 V.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.