

# 3-channel, 8-bit D / A converter

## BU3616K

The BU3616K, a CMOS IC, is a high-speed, low-power-consumption 3-channel 8-bit D / A converter. Its internal reference voltage source eliminates the need for an external reference voltage source.

### ●Applications

Video CDs, CD-V, CD karaoke

### ●Features

- 1) 8-bit resolution.
- 2) Current output.
- 3) Low power consumption (typically 75mW).
- 4) High-speed operation.
- 5) Internal reference voltage circuit.
- 6) TTL input.

### ●Absolute maximum ratings (Ta = 25°C)


Parameter	Symbol	Limits	Unit
Power supply voltage	DV <sub>DD</sub>	- 0.5 ~ + 7.0	V
Analog power supply voltage	AV <sub>DD</sub>	DV <sub>DD</sub> - 0.3 ~ DV <sub>DD</sub> + 0.3	V
Input voltage	V <sub>IN</sub>	- 0.5 ~ DV <sub>DD</sub> + 0.5	V
Output voltage	V <sub>OUT</sub>	- 0.5 ~ DV <sub>DD</sub> + 0.5	V
Storage temperature	T <sub>stg</sub>	- 55 ~ + 125	°C
Power dissipation*1	P <sub>D</sub>	500	mW

\*1 Reduced by 5.0mW for each increase in Ta of 1°C over 25°C.

### ●Recommended operating conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Power supply voltage	DV <sub>DD</sub>	4.5	5.0	5.5	V	
Analog power supply voltage	AV <sub>DD</sub>	4.5	5.0	5.5	V	
Transfer clock width	TCK	58.8	—	—	ns	
Transfer clock width, low level	TCKL	15	—	—	ns	
RGB setup time	TS	5	—	—	ns	
RGB hold time	TH	10	—	—	ns	
Input voltage, low level	V <sub>IL</sub>	—	—	0.8	V	
Input voltage, high level	V <sub>IH</sub>	2.2	—	—	V	
Operating temperature	T <sub>OPR</sub>	- 10	—	70	°C	

●Block diagram

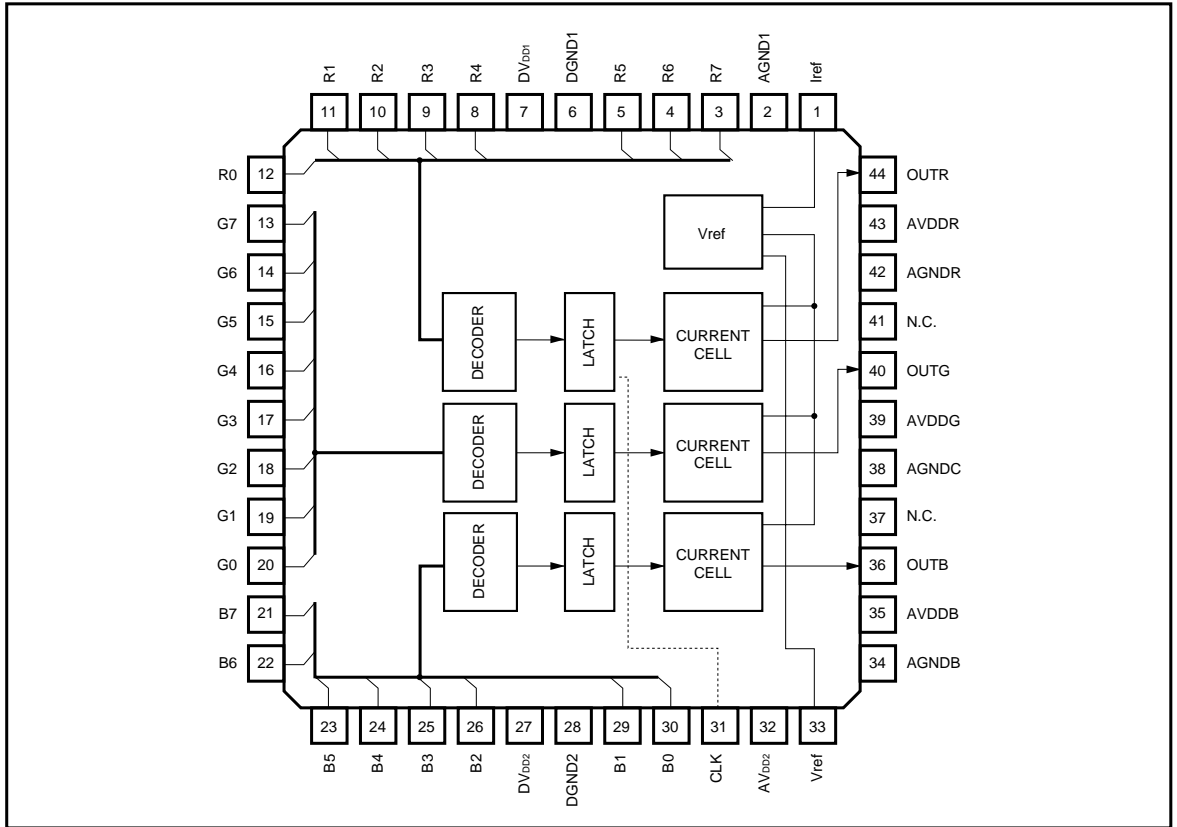

●Electrical characteristics (unless otherwise noted, Ta = 25°C, DVDD = 5.0V, AVDD = 5.0V, RREF = 6.8kΩ, RL = 470Ω, FCK = 15MHz)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Current dissipation	I <sub>CC</sub>	—	15	30	mA	
Differential linearity error	ED	-0.5	—	0.5	LSB	DVDD = 5.0V AVDD = 5.0V
Linearity error	EL	-1.0	—	1.0	LSB	RREF = 6.8kΩ RL = 470Ω
Full-scale voltage	FS	1.29	1.44	1.58	V	FCK = 15MHz
RGB output voltage ratio	F <sub>SCR</sub>	0	0.5	5.0	%	
Output delay time	T <sub>D</sub>	—	30	—	ns	CL = 15pF
Settling time	T <sub>SET</sub>	—	40	—	ns	CL = 15pF

## ●Pin descriptions

Pin No.	I / O	Pin name	Function
1	—	Iref	Output current adjustment resistor connection, Vref output
2	—	AGND 1	Analog ground 1
3	I	R7	RED data input (bit 7, MSB)
4	I	R6	RED data input (bit 6)
5	I	R5	RED data input (bit 5)
6	—	DGND1	Digital ground 1
7	—	DV <sub>DD</sub> 1	Digital power supply 1
8	I	R4	RED data input (bit 4)
9	I	R3	RED data input (bit 3)
10	I	R2	RED data input (bit 2)
11	I	R1	RED data input (bit 1)
12	I	R0	RED data input (bit 0, LSB)
13	I	G7	GREEN data input (bit 7, MSB)
14	I	G6	GREEN data input (bit 6)
15	I	G5	GREEN data input (bit 5)
16	I	G4	GREEN data input (bit 4)
17	I	G3	GREEN data input (bit 3)
18	I	G2	GREEN data input (bit 2)
19	I	G1	GREEN data input (bit 1)
20	I	G0	GREEN data input (bit 0, LSB)
21	I	B7	BLUE data input (bit 7, MSB)
22	I	B6	BLUE data input (bit 6)
23	I	B5	BLUE data input (bit 5)
24	I	B4	BLUE data input (bit 4)
25	I	B3	BLUE data input (bit 3)
26	I	B2	BLUE data input (bit 2)
27	—	DV <sub>DD</sub> 2	Digital power supply 2
28	—	DGND2	Digital ground 2
29	I	B1	BLUE data input (bit 1)
30	I	B0	BLUE data input (bit 0, LSB)
31	I	CLK	System lock
32	—	AV <sub>DD</sub> 2	Analog power supply 2
33	O	Vref	Attached capacitance-adding pin (C = 0.1 μF)
34	—	AGNDB	Analog ground B
35	—	AV <sub>DD</sub> B	Analog power supply B
36	O	OUTB	BLUE output
37	—	N.C.	—

Pin No.	I / O	Pin name	Function
38	—	AGNDG	Analog ground G
39	—	AVDDG	Analog power supply G
40	O	OUTG	GREEN output
41	—	N.C.	—
42	—	AGNDR	Analog ground R
43	—	AVDDR	Analog power supply R
44	O	OUTR	RED output

●Input / output circuits

Pin No.	Pin name	Equivalent circuit
3 ~ 5 8 ~ 26 29 ~ 31	R0 ~ R7, G0 ~ G7 B0 ~ B7, CLK	
36, 40, 44	OUTR, OUTG OUTB	
1, 33	Iref, Vref	

●Application example


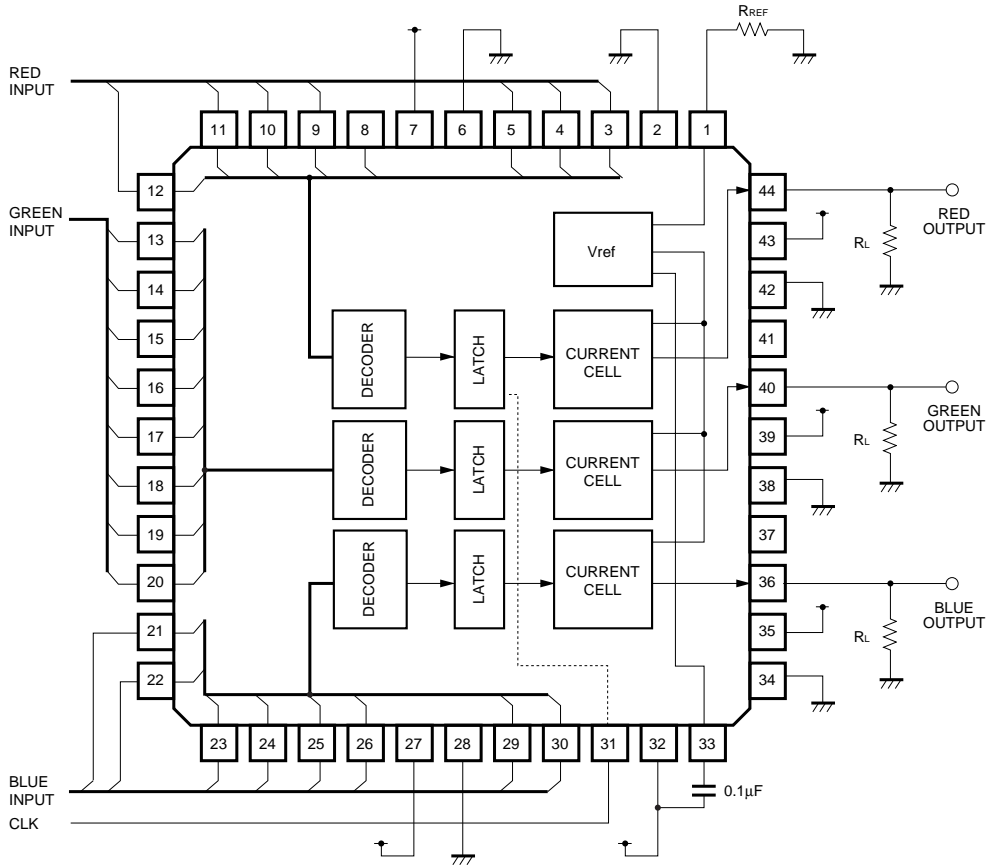


Fig.1

●External dimensions (Units: mm)



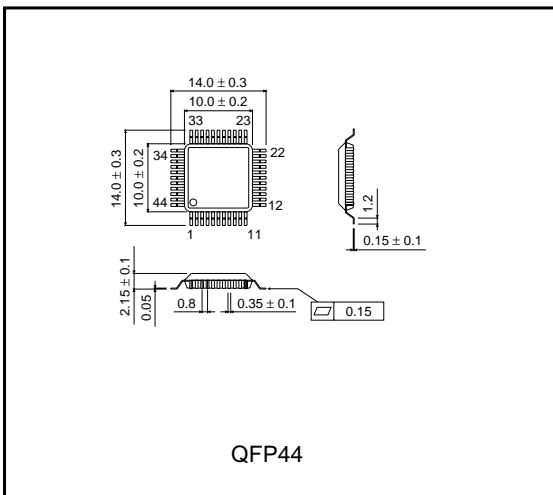

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.