



Lead-Mount, Phase Control SCR 0.3 Amperes/400-600 Volts

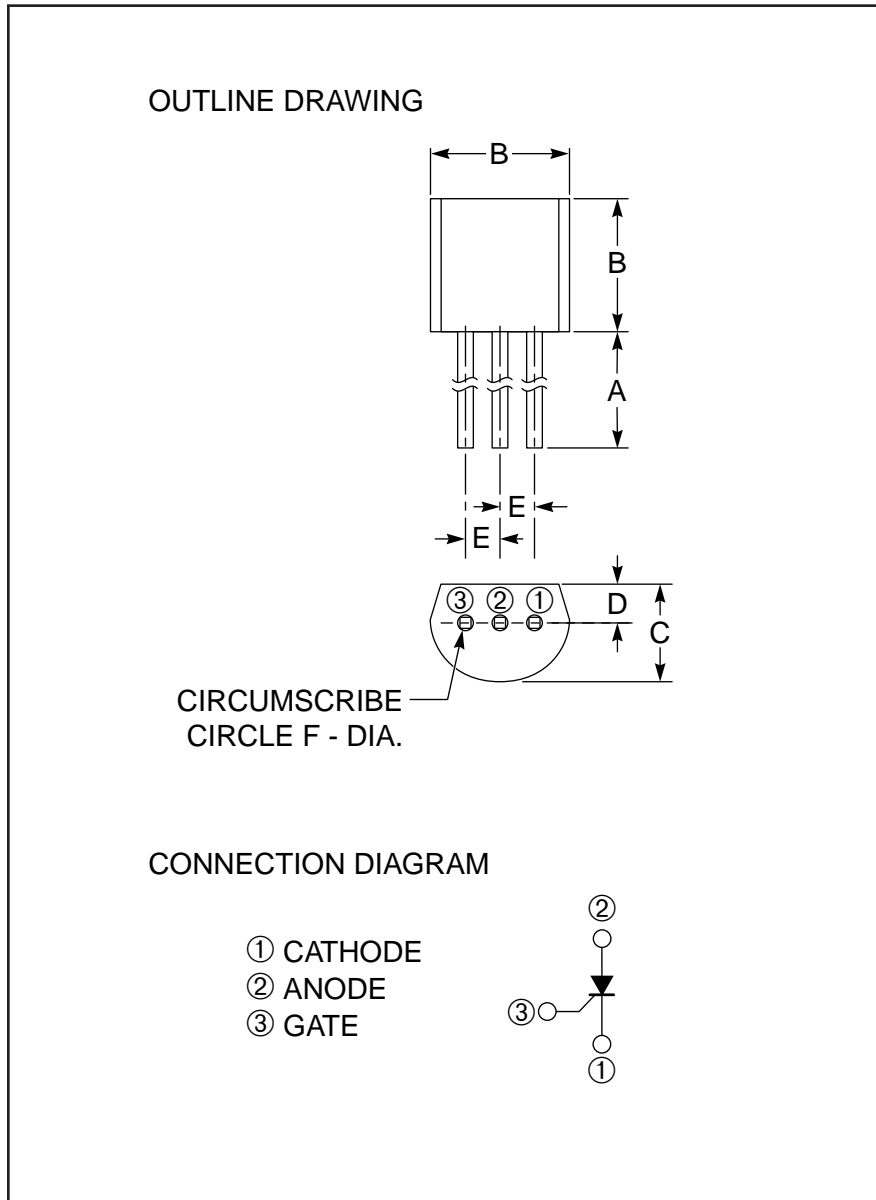

Outline Drawing (Conforms to JEDEC TO-92)

Dimensions	Inches	Millimeters
A	0.49 Min.	12.5 Min.
B	0.20 Max.	5.0 Max.
C	0.15 Max.	3.9 Max.
D	0.05	1.3
E	0.049	1.25
F	0.028 Dia.	0.7 Dia.

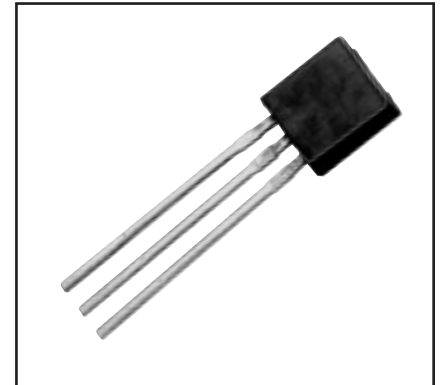

Description:

The Powerex CR03AM Lead mount Phase Control SCRs are glass-passivated thyristors for use in low-power control and rectification. These devices are molded epoxy plastic types.

Features:

- Glass Passivation
- High Current Pulse Application Use

Applications:

- Fault Interrupters
- Gas Igniters
- Static Switch
- Motor Control

Ordering Information:

Example: Select the complete seven or eight digit part number you desire from the table - i.e. CR03AM-8 is a 400 Volt, 0.3 Ampere Phase Control SCR.

Type	V _{DRM} /V _{R_{RM}} Volts	Code
CR03AM	400	-8
	600	-12

CR03AM
Lead-Mount, Phase Control SCR
 0.3 Amperes/400-600 Volts


Absolute Maximum Ratings, $T_a = 25\text{ }^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	CR03AM-8	CR03AM-12	Units
Repetitive Peak Off-state Voltage	V_{DRM}	400	600	Volts
Repetitive Peak Reverse Voltage	V_{RRM}	400	600	Volts
Non-repetitive Peak Reverse Voltage	V_{RSM}	500	720	Volts
DC Reverse Voltage	$V_{R(DC)}$	320	480	Volts
DC Forward Voltage	$V_{D(DC)}$	320	480	Volts
RMS On-state Current	$I_{T(RMS)}$	0.47	0.47	Amperes
Average On-state Current (Nominal, See Graphs) $T_a = 47^\circ\text{C}$	$I_{T(avg)}$	0.3	0.3	Amperes
Non-repetitive Peak Surge, On-state Current One Cycle (60 Hz)	I_{TSM}	20	20	Amperes
I^2t for Fusing, $t = 8.3$ msec	I^2t	1.6	1.6	A^2sec
Peak Gate Power Dissipation	P_{GM}	0.5	0.5	Watts
Average Gate Power Dissipation	$P_{G(avg)}$	0.1	0.1	Watts
Peak Forward Gate Current	I_{FGM}	0.3	0.3	Amperes
Peak Forward Gate Voltage	V_{FGM}	6	6	Volts
Peak Reverse Gate Voltage	V_{RGM}	6	6	Volts
Storage Temperature	T_{stg}	-40 to 125	-40 to 125	$^\circ\text{C}$
Operating Temperature	T_j	-40 to 125	-40 to 125	$^\circ\text{C}$
Weight	-	0.23	0.23	Grams

Electrical and Thermal Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Voltage – Blocking State						
Peak Forward Leakage	I_{DRM}	$T_j = 110^\circ\text{C}$, $V_D = V_{DRM}$	-	-	0.1	mA
Peak Reverse Leakage	I_{RRM}	$T_j = 110^\circ\text{C}$, $V_R = V_{RRM}$	-	-	0.1	mA
Current – Conducting State						
Peak On-state Voltage	V_{TM}	$T_a = 25^\circ\text{C}$, $I_{TM} = 4$ A Peak	-	-	1.8	Volts
DC Holding Current	I_H	$V_D = 12\text{V}$, $R_{GK} = 1\text{k}\Omega$, $T_j = 25^\circ\text{C}$	-	1.5	3.0	mA
Thermal Resistance, Junction-to-ambient						
	$R_{th(j-a)}$	-	-	-	180	$^\circ\text{C/W}$
Gate – Parameters						
Gate Current to Trigger†	I_{GT}	$V_D = 6\text{V}$, $R_L = 60\Omega$, $T_j = 25^\circ\text{C}$	1	-	100	μA
Gate Voltage to Trigger†	V_{GT}	$V_D = 6\text{V}$, $R_L = 60\Omega$, $T_j = 25^\circ\text{C}$	-	-	0.8	Volts
Non-triggering Gate Voltage	V_{GDM}	$V_D = 1/2V_{DRM}$, $R_{GK} = 1\text{k}\Omega$, $T_j = 110^\circ\text{C}$	0.2	-	-	Volts










† I_{GT} , V_{GT} Measurement Circuit

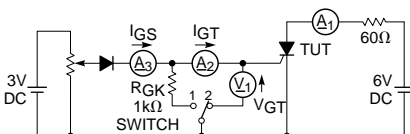

SWITCH 1: I_{GT} Measurement
 SWITCH 2: V_{GT} Measurement
 (Inner resistance of voltage meter is about $1\text{k}\Omega$)


CR03AM

Lead-Mount, Phase Control SCR
0.3 Amperes/400-600 Volts

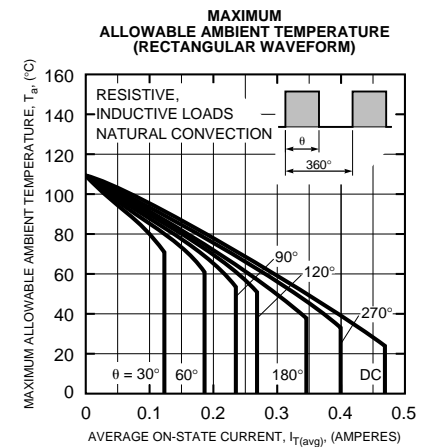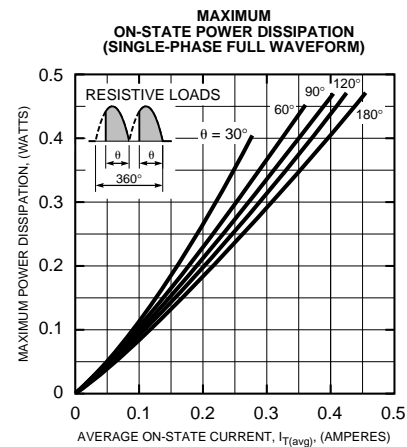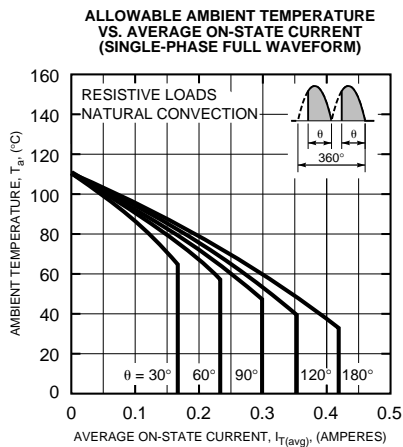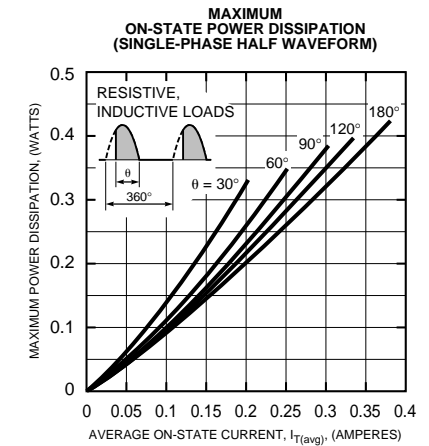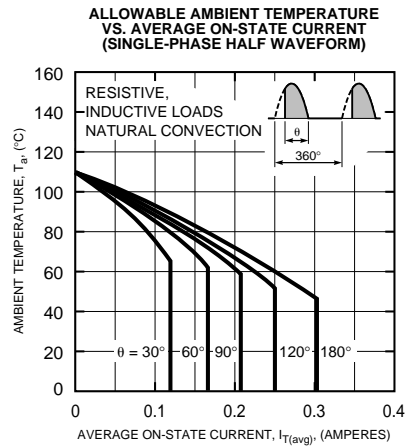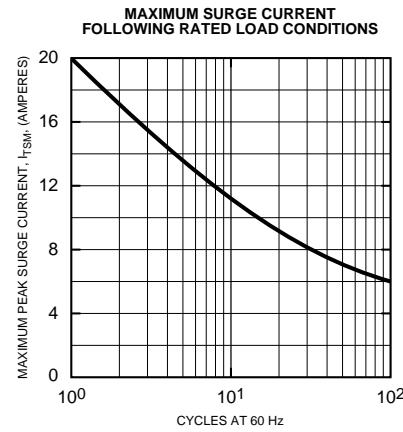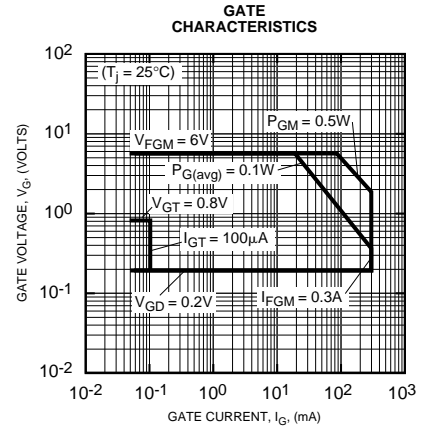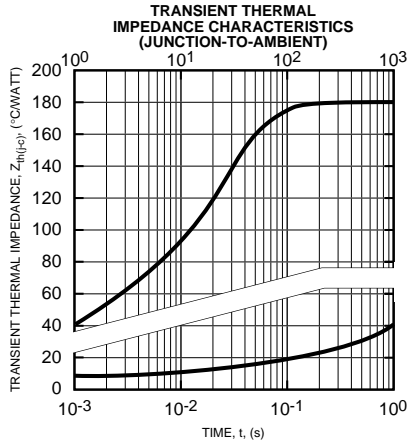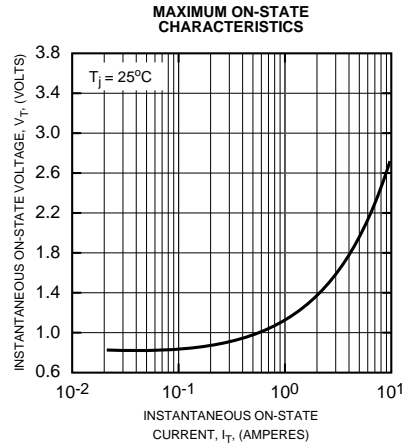


CR03AM
Lead-Mount, Phase Control SCR
 0.3 Amperes/400-600 Volts


MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)

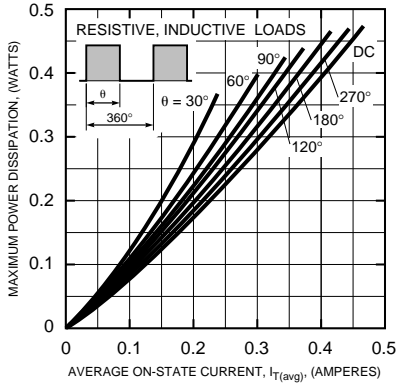


GATE TRIGGER CURRENT VS. JUNCTION TEMPERATURE (TYPICAL)

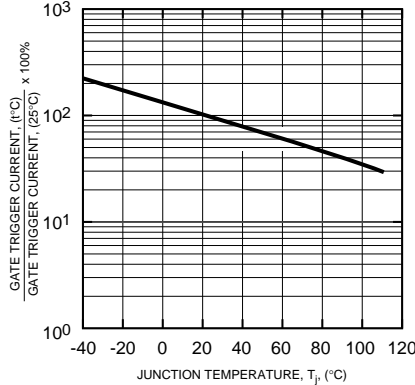


GATE TRIGGER VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

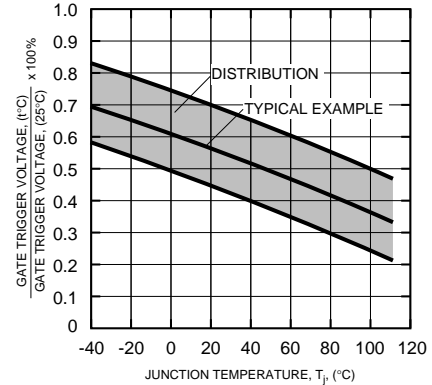


HOLDING CURRENT VS. GATE-TO-CATHODE RESISTANCE (TYPICAL)

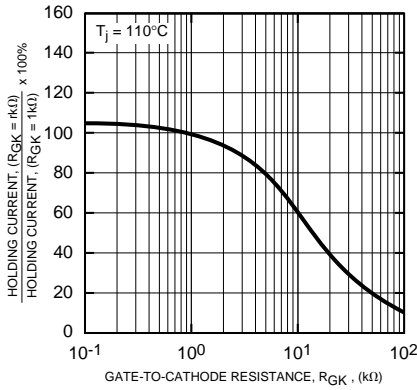

BREAKOVER VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

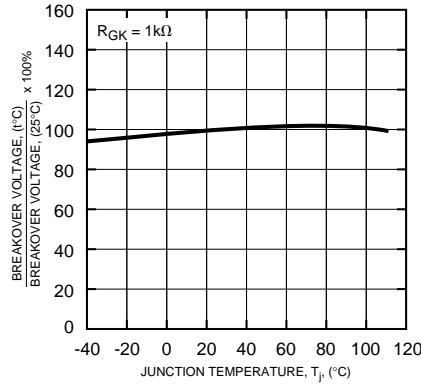

REPETITIVE PEAK REVERSE VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

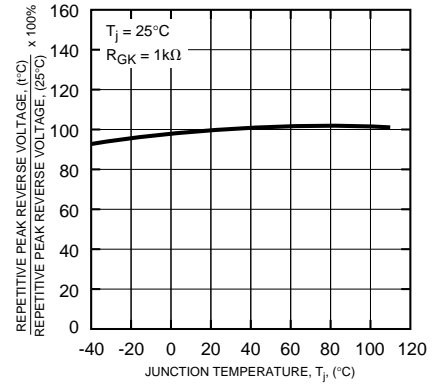



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.