


Fast Recovery Epitaxial Diode (FRED)


DSEI 120

$I_{FAVM} = 126 \text{ A}$
 $V_{RRM} = 600 \text{ V}$
 $t_{rr} = 35 \text{ ns}$

| V_{RSM} | V_{RRM} | Type |
|-----------|-----------|--------------|
| V | V | |
| 600 | 600 | DSEI 120-06A |



TO-247 AD



A = Anode, C = Cathode

| Symbol | Test Conditions | Maximum Ratings | |
|--------------|--|-----------------|----------------------|
| I_{FRMS} | $T_{VJ} = T_{VJM}$ | 100 | A |
| I_{FAVM} ① | $T_C = 70^\circ\text{C}$; rectangular, $d = 0.5$ | 126 | A |
| I_{FAV} ② | $T_C = 110^\circ\text{C}$; rectangular, $d = 0.5$ | 77 | A |
| I_{FRM} | $t_p < 10 \mu\text{s}$; rep. rating, pulse width limited by T_{VJM} | tdb | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine | 600 | A |
| | $t = 8.3 \text{ ms}$ (60 Hz), sine | 660 | A |
| I_{FSM} | $T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine | 540 | A |
| | $t = 8.3 \text{ ms}$ (60 Hz), sine | 600 | A |
| I^2t | $T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine | 1800 | A^2s |
| | $t = 8.3 \text{ ms}$ (60 Hz), sine | 1800 | A^2s |
| I^2t | $T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine | 1450 | A^2s |
| | $t = 8.3 \text{ ms}$ (60 Hz), sine | 1500 | A^2s |
| T_{VJ} | | -40...+150 | $^\circ\text{C}$ |
| T_{VJM} | | 150 | $^\circ\text{C}$ |
| T_{stg} | | -40...+150 | $^\circ\text{C}$ |
| P_{tot} | $T_C = 25^\circ\text{C}$ | 357 | W |
| M_d | Mounting torque | 0.8...1.2 | Nm |
| Weight | | 6 | g |

Features

- International standard package JEDEC TO-247 AD
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM} -values
- Soft recovery behaviour
- Epoxy meets UL 94V-0

Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses
- Operating at lower temperature or space saving by reduced cooling

Dimensions

See DSEI 60-12 page D5 - 27

| Symbol | Test Conditions | Characteristic Values | |
|------------|---|-----------------------|----------------------|
| | | typ. | max. |
| I_R | $T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ | | 3 mA |
| | $T_{VJ} = 25^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ | | 0.75 mA |
| | $T_{VJ} = 125^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ | | 20 mA |
| V_F | $I_F = 70 \text{ A}$; $T_{VJ} = 150^\circ\text{C}$ $T_{VJ} = 25^\circ\text{C}$ | | 1.12 V |
| | | | 1.3 V |
| V_{T0} | For power-loss calculations only | | 0.85 V |
| r_T | $T_{VJ} = T_{VJM}$ | | 3.5 $\text{m}\Omega$ |
| R_{thJC} | 0.25 | | 0.35 K/W |
| R_{thCK} | | | K/W |
| R_{thJA} | | | 35 K/W |
| t_{rr} | $I_F = 1 \text{ A}$; $-di/dt = 200 \text{ A}/\mu\text{s}$; $V_R = 30 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ | 35 | 50 ns |
| I_{RM} | $V_R = 350 \text{ V}$; $I_F = 80 \text{ A}$; $-di_F/dt = 200 \text{ A}/\mu\text{s}$ $L \leq 0.05 \mu\text{H}$; $T_{VJ} = 100^\circ\text{C}$ | 17 | 21 A |

① Chip capability, ② limited to 70 A by leads

Data according to IEC 60747
IXYS reserves the right to change limits, test conditions and dimensions

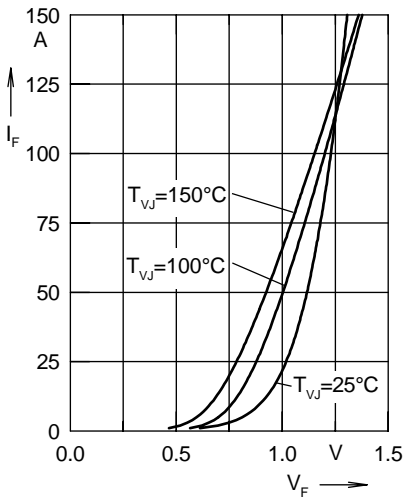


Fig. 1 Forward current I_F versus V_F

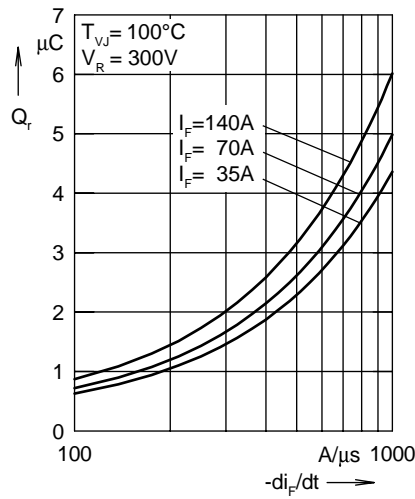


Fig. 2 Reverse recovery charge Q_r versus $-di_F/dt$

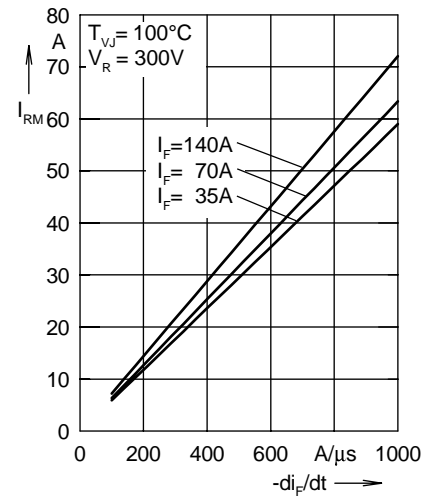


Fig. 3 Peak reverse current I_{RM} versus $-di_F/dt$

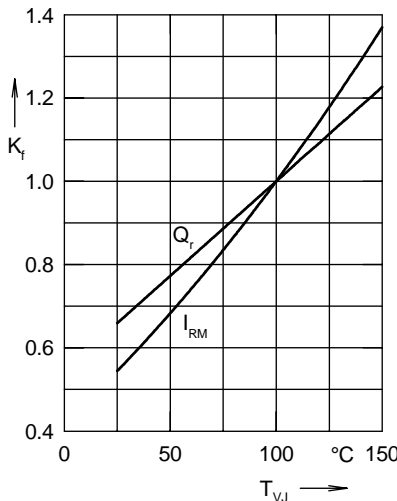


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

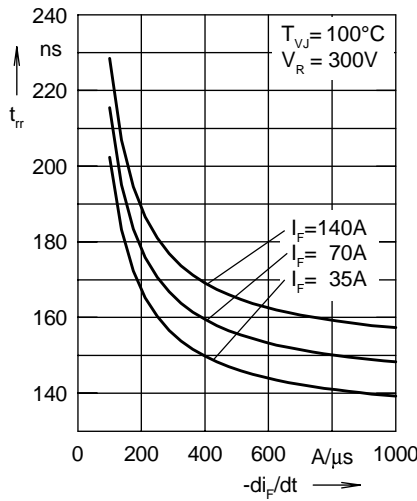


Fig. 5 Recovery time t_{rr} versus $-di_F/dt$

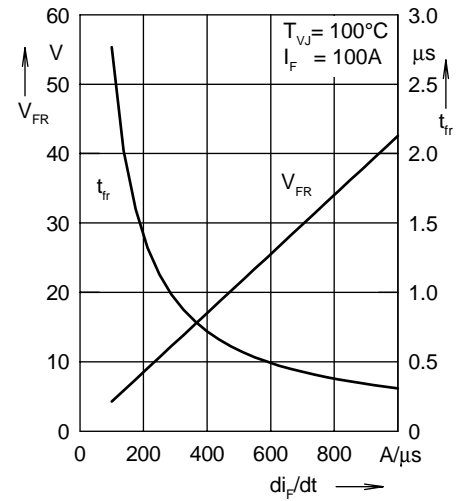


Fig. 6 Peak forward voltage V_{FR} and t_{rr} versus di_F/dt

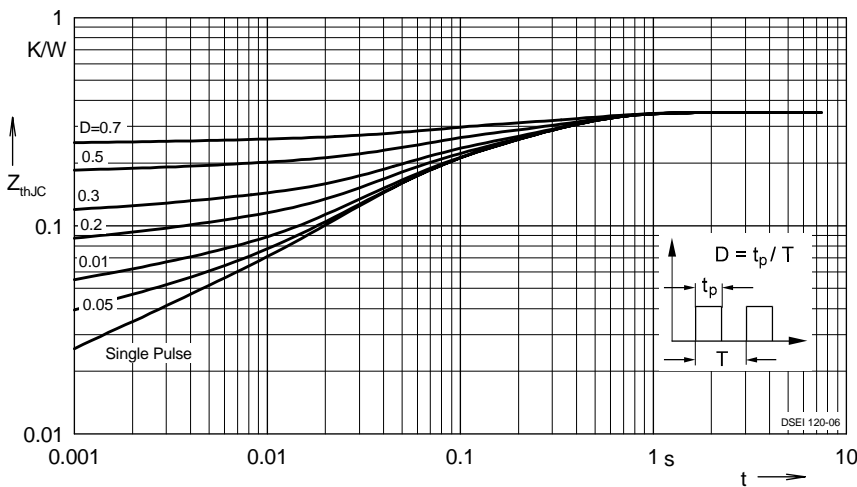


Fig. 7 Transient thermal resistance junction to case at various duty cycles

Constants for Z_{thJC} calculation:

| i | R_{thi} (K/W) | t_i (s) |
|---|-----------------|-----------|
| 1 | 0.017 | 0.00038 |
| 2 | 0.0184 | 0.0026 |
| 3 | 0.1296 | 0.0387 |
| 4 | 0.185 | 0.274 |



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.