

# HiPerFET™ Power MOSFETs

**IXFK100N10**  
**IXFN150N10**


$V_{DSS}$	$I_{D25}$	$R_{DS(on)}$
<b>100 V</b>	<b>100 A</b>	<b>12 mΩ</b>
<b>100 V</b>	<b>150 A</b>	<b>12 mΩ</b>

$t_{rr} \leq 200 \text{ ns}$


N-Channel Enhancement Mode  
Avalanche Rated, High dv/dt, Low  $t_{rr}$

Symbol	Test Conditions	Maximum Ratings		
		IXFK	IXFN	
$V_{DSS}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$	100	100	V
$V_{DGR}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GS} = 1 \text{ M}\Omega$	100	100	V
$V_{GS}$	Continuous	$\pm 20$	$\pm 20$	V
$V_{GSM}$	Transient	$\pm 30$	$\pm 30$	V
$I_{D25}$	$T_C = 25^\circ\text{C}$	100 ①	150	A
$I_{D120}$	$T_C = 120^\circ\text{C}$ , limited by external leads	76	-	A
$I_{DM}$	$T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$	560	560	A
$I_{AR}$	$T_C = 25^\circ\text{C}$	75	75	A
$E_{AR}$	$T_C = 25^\circ\text{C}$	30	30	mJ
dv/dt	$I_S \leq I_{DM}$ , $di/dt \leq 100 \text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$ , $R_G = 2 \Omega$	5	5	V/ns
$P_D$	$T_C = 25^\circ\text{C}$	500	520	W
$T_J$		-55 ... +150		$^\circ\text{C}$
$T_{JM}$			150	$^\circ\text{C}$
$T_{stg}$		-55 ... +150		$^\circ\text{C}$
$T_L$	1.6 mm (0.063 in) from case for 10 s	300	-	$^\circ\text{C}$
$V_{ISOL}$	50/60 Hz, RMS $t = 1 \text{ min}$ $I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	-	2500 3000	V~ V~
$M_d$	Mounting torque Terminal connection torque	0.9/6 -	1.5/13 1.5/13	Nm/lb.in. Nm/lb.in.
Weight		10	30	g

### TO-264 AA (IXFK)

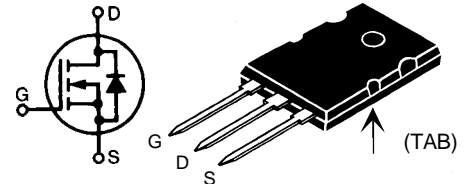

### miniBLOC, SOT-227 B (IXFN) E153432

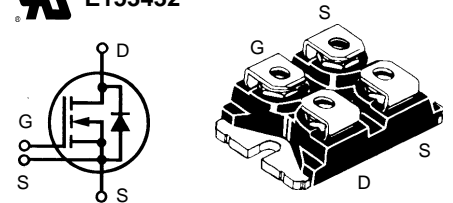

G = Gate  
S = Source  
D = Drain  
TAB = Drain  
Either Source terminal at miniBLOC can be used as Main or Kelvin Source

### Features

- International standard packages
- JEDEC TO-264 AA, epoxy meet UL 94 V-0, flammability classification
- miniBLOC with Aluminium nitride isolation
- Low  $R_{DS(on)}$  HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
- Fast intrinsic Rectifier

### Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls
- Low voltage relays


### Advantages

- Easy to mount
- Space savings
- High power density


Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$V_{DSS}$	$V_{GS} = 0 \text{ V}$ , $I_D = 1 \text{ mA}$	100		V
$V_{GH(th)}$	$V_{DS} = V_{GS}$ , $I_D = 8 \text{ mA}$	2		V
$I_{GSS}$	$V_{GS} = \pm 20 \text{ V}_{DC}$ , $V_{DS} = 0$			$\pm 200$ nA
$I_{DSS}$	$V_{DS} = 0.8 \cdot V_{DSS}$ , $T_J = 25^\circ\text{C}$ $V_{GS} = 0 \text{ V}$ , $T_J = 125^\circ\text{C}$			400 $\mu\text{A}$ 2 mA
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}$ , $I_D = 75 \text{ A}$ Pulse test, $t \leq 300 \mu\text{s}$ , duty cycle $d \leq 2\%$			12 mΩ

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$g_{fs}$	$V_{DS} = 10\text{ V}; I_D = 50\text{ A}$ , pulse test		80	S
$C_{iss}$	$V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$		9000	pF
$C_{oss}$			3200	pF
$C_{rss}$			1800	pF
$t_{d(on)}$	$V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 75\text{ A}$ $R_G = 1\ \Omega$ (External),		30	ns
$t_r$			60	ns
$t_{d(off)}$			100	ns
$t_f$			60	ns
$Q_{g(on)}$	$V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 75\text{ A}$		360	nC
$Q_{gs}$			75	nC
$Q_{gd}$			180	nC
$R_{thJC}$	TO-264 AA		0.25	K/W
$R_{thCK}$	TO-264 AA		0.15	K/W
$R_{thJC}$	miniBLOC, SOT-227 B		0.24	K/W
$R_{thCK}$	miniBLOC, SOT-227 B		0.05	K/W

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$I_S$	$V_{GS} = 0\text{ V}$	IXFK 100 IXFN 150		100 A 150 A
$I_{SM}$	Repetitive; pulse width limited by $T_{JM}$	IXFK 100 IXFN 150		400 A 600 A
$V_{SD}$	$I_F = 100\text{ A}, V_{GS} = 0\text{ V}$ , Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$			1.75 V
$t_{rr}$	$I_F = 25\text{ A}$ $-di/dt = 100\text{ A}/\mu\text{s}$ , $V_R = 50\text{ V}$		150	200 ns
$Q_{RM}$			0.6	$\mu\text{C}$
$I_{RM}$			8	A

**TO-264 AA Outline**


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	.780	.786
e	5.46		.215	BSC
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072

**miniBLOC, SOT-227 B**


M4 screws (4x) supplied

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	38.00	38.23	1.496	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.05	0.1	-0.002	0.004

Fig. 1 Output Characteristics

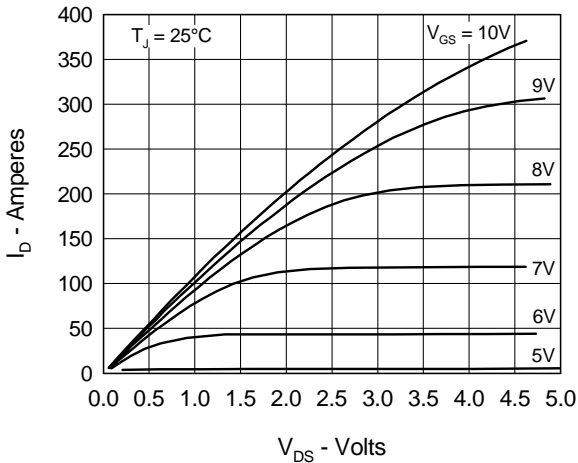


Fig. 2 Input Admittance

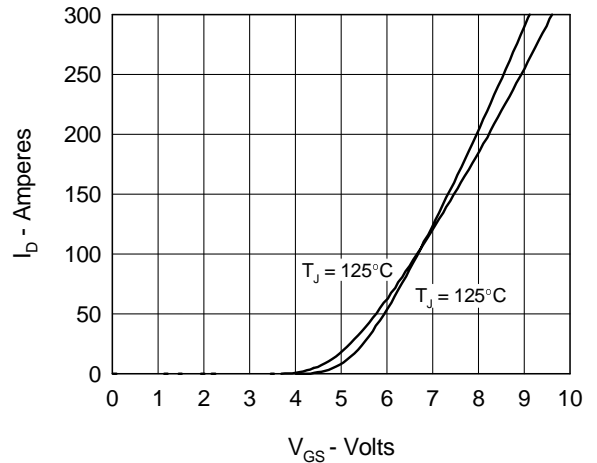


Fig. 3  $R_{DS(on)}$  vs. Drain Current

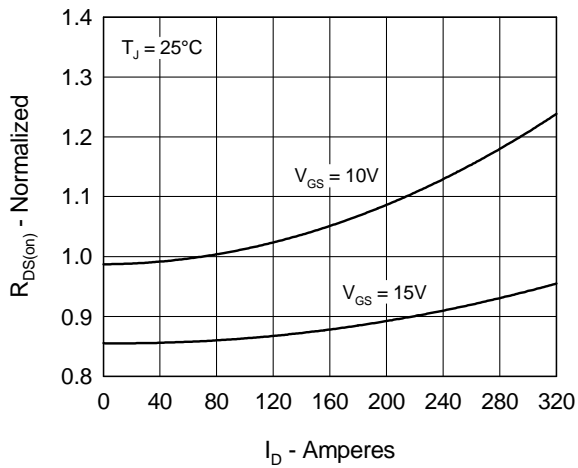


Fig. 4 Temperature Dependence of Drain to Source Resistance

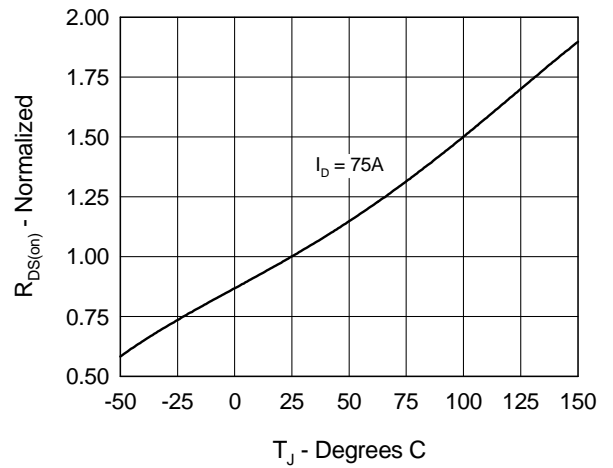


Fig. 5 Drain Current vs. Case Temperature



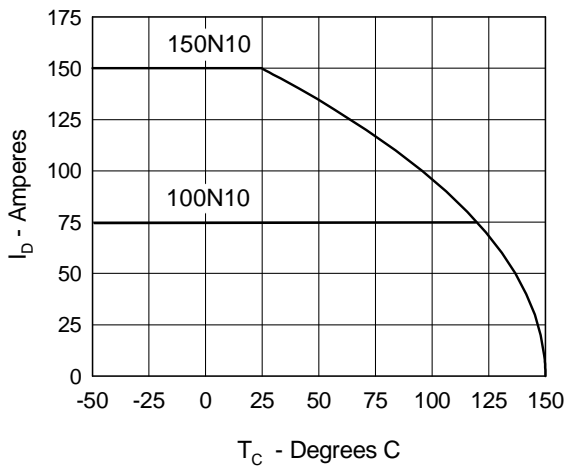



Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage

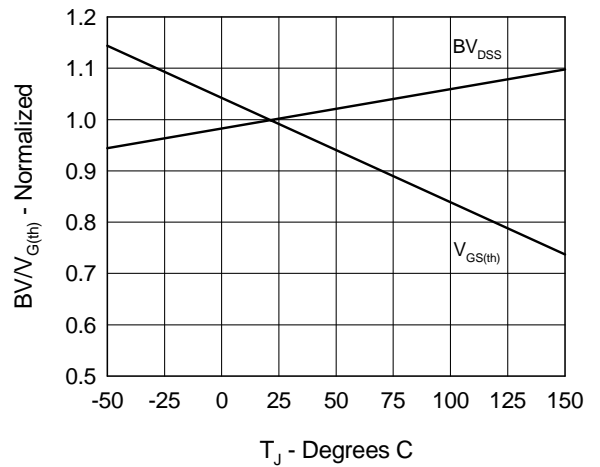


**Fig.7 Gate Charge Characteristic Curve**

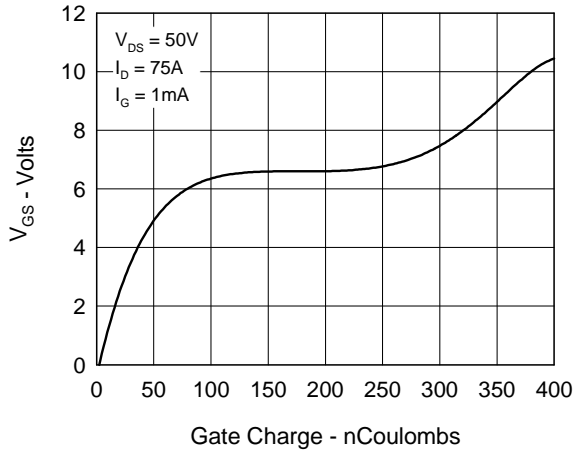


**Fig.8 Capacitance Curves**

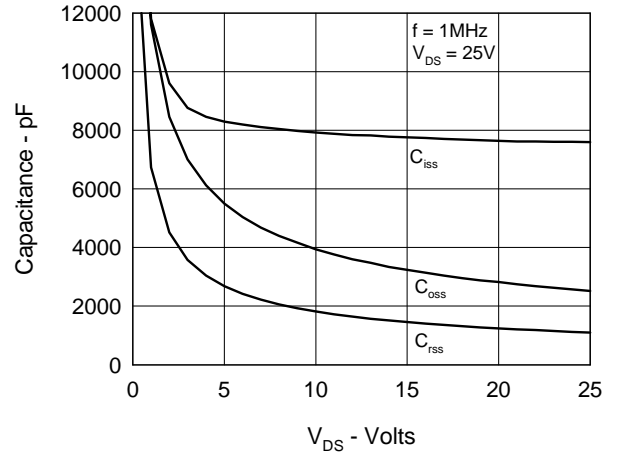

**Fig.9 Source Current vs. Source to Drain Voltage**

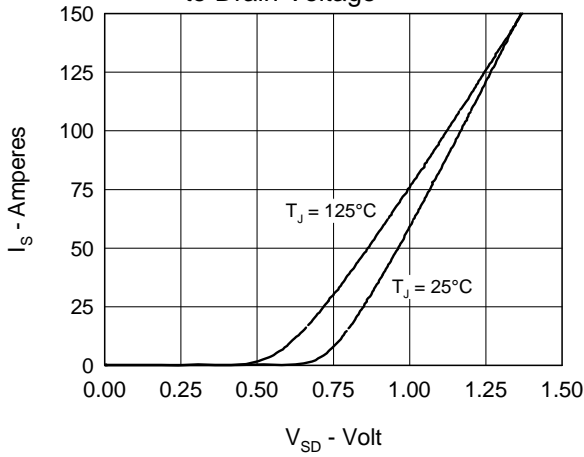

**Fig.10 Transient Thermal Impedance**

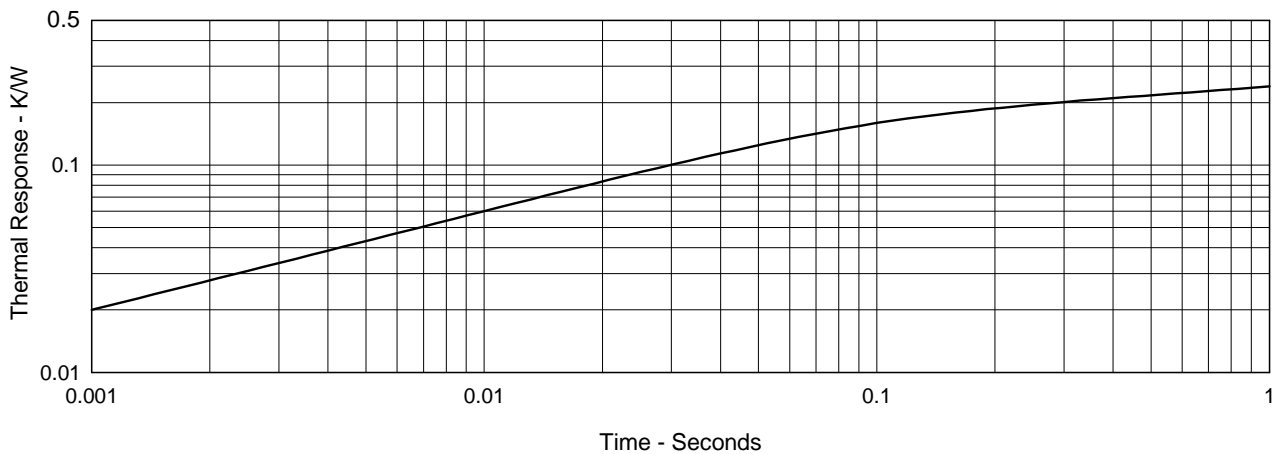



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.