


MECHANICAL DATA

Dimensions in mm

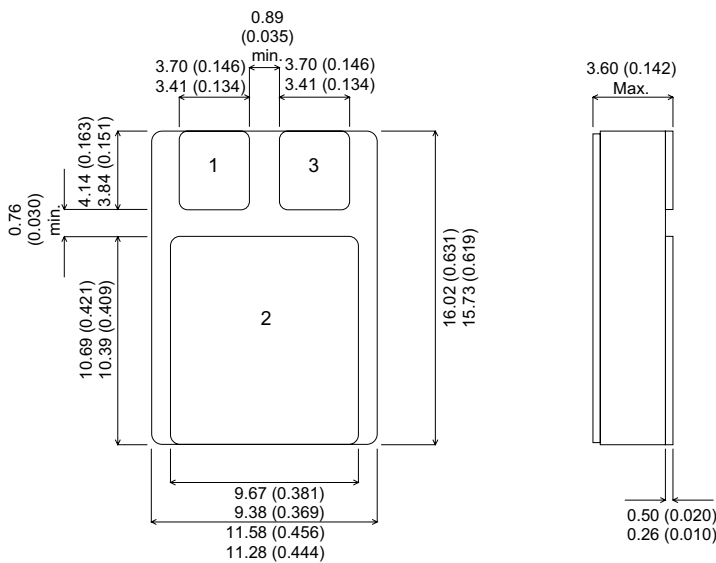

SMD1

Pad 1 – Base Pad 2 – Collector Pad 3 – Emitter

**NPN
FAST SWITCHING
TRANSISTOR**

FEATURES

- **LOW SATURATION VOLTAGE**
- **ULTRA FAST TURN-ON AND TURN-OFF SWITCHING ($t_r / t_f = 40\text{ns}$)**

APPLICATIONS

- **High speed TO220 transistor suited for low voltage applications.**
- **High frequency and high efficiency converters, switching regulators and motor controls.**
- **Ideally suited for 12V and 24V inverters.**

ABSOLUTE MAXIMUM RATINGS ($T_{\text{case}} = 25^\circ\text{C}$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	200V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	100V
V_{EBO}	Emitter – Base Voltage ($I_C = 0$)	7V
I_C	Collector Current	14A
I_B	Base Current	4A
P_{tot}	Total Dissipation at $T_{\text{case}} = 25^\circ\text{C}$	85W
	Derate above 25°C when used on efficient heatsink	4.8W/ $^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65 to 200°C
R_{th}	Thermal Resistance Junction – Case	175 $^\circ\text{C} / \text{W}$

ELECTRICAL CHARACTERISTICS ($T_{\text{case}} = 25^{\circ}\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit		
ELECTRICAL CHARACTERISTICS							
$V_{\text{CEO(sus)}}^*$	Collector – Emitter Sustaining Voltage	$I_{\text{C}} = 200\text{mA}$	100		V		
$V_{(\text{BR})\text{EBO}}^*$	Emitter – Base Breakdown Voltage	$I_{\text{E}} = 1\text{mA}$	7				
I_{CER}^*	Collector Cut–Off Current	$I_{\text{B}} = 0$ $R_{\text{BE}} = 50\Omega$	$V_{\text{CE}} = 200\text{V}$ $T_{\text{C}} = 125^{\circ}\text{C}$		3	mA	
I_{CBO}^*	Collector – Base Cut–Off Current	$I_{\text{E}} = 0$ $V_{\text{BE}} = -1.5\text{V}$	$V_{\text{CB}} = 200\text{V}$ $T_{\text{C}} = 125^{\circ}\text{C}$		1	mA	
I_{EBO}^*	Emitter Cut–Off Current	$I_{\text{C}} = 0$	$V_{\text{EB}} = 5\text{V}$		1	mA	
$V_{\text{CE(sat)}}^*$	Collector – Emitter Saturation Voltage	$I_{\text{C}} = 5\text{A}$	$I_{\text{B}} = 500\text{mA}$		0.6	V	
		$I_{\text{C}} = 10\text{A}$	$I_{\text{B}} = 1\text{A}$		1.5		
$V_{\text{BE(sat)}}^*$	Base – Emitter Saturation Voltage	$I_{\text{C}} = 10\text{A}$	$I_{\text{B}} = 1\text{A}$		2	V	
SWITCHING CHARACTERISTICS (resistive load)							
t_{on}	Turn–On Time	$V_{\text{CC}} = 50\text{V}$	$I_{\text{C}} = 12\text{A}$		0.2	0.6	μS
t_{s}	Storage Time	$V_{\text{BE}} = -6\text{V}$	$I_{\text{B1}} = 1.2\text{A}$		0.4	1	
t_{f}	Fall Time	$R_{\text{BB}} = 2.5\Omega$			0.04	0.25	
SWITCHING CHARACTERISTICS (inductive load)							
t_{s}	Storage Time	$V_{\text{CC}} = 50\text{V}$	$I_{\text{C}} = 12\text{A}$		0.5		μS
t_{f}	Fall Time	$V_{\text{BE}} = -5\text{V}$	$I_{\text{B1}} = 1.2\text{A}$		0.04		
t_{s}	Storage Time ($T_{\text{j}} = 125^{\circ}\text{C}$)	$L_{\text{B}} = 0.5\mu\text{H}$				2	
t_{f}	Fall Time ($T_{\text{j}} = 125^{\circ}\text{C}$)					0.15	

* Pulse test $t_{\text{p}} = 300\mu\text{s}$, $\delta \leq 2\%$



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.