

CMKT3904 NPN
 CMKT3906 PNP
 CMKT3946 NPN/PNP

ULTRAmi™
 DUAL SMALL SIGNAL
 SWITCHING TRANSISTOR

ULTRAmi™



SOT-363

Central™
Semiconductor Corp.

FEATURES:

- SPACE SAVING ULTRAmi™ FAMILY
- TWO NPN OR TWO PNP TRANSISTORS IN A SINGLE PACKAGE
- COMPLEMENTARY, ONE NPN AND ONE PNP TRANSISTOR IN A SINGLE PACKAGE

Marking Codes:

CMKT3904 K40
 CMKT3906 K60
 CMKT3946 K46

DESCRIPTION:

The Central Semiconductor CMKT3904 (two single NPN), CMKT3906 (two single PNP), and CMKT3946 (one each NPN and PNP complementary) are combinations of transistors in a space saving SOT-363 ULTRAmi™ package, designed for small signal general purpose amplifier and switching applications.

MAXIMUM RATINGS: (T_A=25°C)

	<u>SYMBOL</u>	<u>NPN</u>	<u>PNP</u>	<u>UNITS</u>
Collector-Base Voltage	V _{CBO}	60	40	V
Collector-Emitter Voltage	V _{CEO}	40	40	V
Emitter-Base Voltage	V _{EBO}	6.0	5.0	V
Collector Current	I _C		200	mA
Power Dissipation	P _D		350	mW
Operating and Storage				
Junction Temperature	T _J , T _{stg}	-65 to +150		°C
Thermal Resistance	θ _{JA}	357		°C/W

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)


<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>NPN</u>		<u>PNP</u>		<u>UNIT</u>
		<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	
I _{CEV}	V _{CE} =30V, V _{EB} =3.0V		50		50	nA
I _{BL}	V _{CE} =30V, V _{EB} =3.0V		50			nA
BV _{CBO}	I _C =10μA	60		40		V
BV _{CEO}	I _C =1.0mA	40		40		V
BV _{EBO}	I _E =10μA	6.0		5.0		V
V _{CE(SAT)}	I _C =10mA, I _B =1.0mA		0.20		0.25	V
V _{CE(SAT)}	I _C =50mA, I _B =5.0mA		0.30		0.40	V
V _{BE(SAT)}	I _C =10mA, I _B =1.0mA	0.65	0.85	0.65	0.85	V
V _{BE(SAT)}	I _C =50mA, I _B =5.0mA		0.95		0.95	V
h _{FE}	V _{CE} =1.0V, I _C =0.1mA	40		60		
h _{FE}	V _{CE} =1.0V, I _C =1.0mA	70		80		
h _{FE}	V _{CE} =1.0V, I _C =10mA	100	300	100	300	
h _{FE}	V _{CE} =1.0V, I _C =50mA	60		60		
h _{FE}	V _{CE} =1.0V, I _C =100mA	30		30		

R0 (11-October 2001)

ULTRAmiTM
 DUAL SMALL SIGNAL
 SWITCHING TRANSISTOR


SYMBOL	TEST CONDITIONS	NPN		PNP		UNIT
		MIN	MAX	MIN	MAX	
f_T	$V_{CE}=20V, I_C=10mA, f=100MHz$	300		250		MHz
C_{ob}	$V_{CB}=5.0V, I_E=0, f=1.0MHz$		4.0		4.5	pF
C_{ib}	$V_{BE}=0.5V, I_C=0, f=1.0MHz$		8.0		10	pF
h_{ie}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	1.0	10	2.0	12	k Ω
h_{re}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	0.5	8.0	0.1	10	$\times 10^{-4}$
h_{fe}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	100	400	100	400	
h_{oe}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	1.0	40	3.0	60	$\mu mhos$
NF	$V_{CE}=5.0V, I_C=100\mu A, R_S=1.0k\Omega$ $f=10Hz$ to 15.7kHz		5.0		4.0	dB
t_d	$V_{CC}=3.0V, V_{BE}=0.5V, I_C=10mA, I_{B1}=1.0mA$		35		35	ns
t_r	$V_{CC}=3.0V, V_{BE}=0.5V, I_C=10mA, I_{B1}=1.0mA$		35		35	ns
t_s	$V_{CC}=3.0V, I_C=10mA, I_{B1}=I_{B2}=1.0mA$		200		225	ns
t_f	$V_{CC}=3.0V, I_C=10mA, I_{B1}=I_{B2}=1.0mA$		50		75	ns

SOT-363 - MECHANICAL OUTLINE

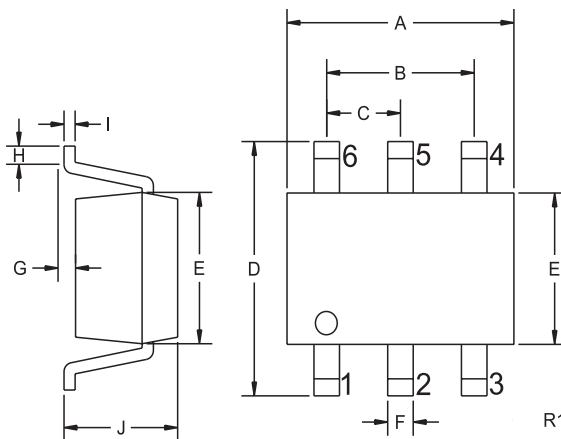

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.073	0.085	1.85	2.15
B	0.051		1.30	
C	0.026		0.65	
D	0.075	0.091	1.90	2.30
E	0.043	0.055	1.10	1.40
F	0.006	0.012	0.15	0.30
G	0.000	0.004	0.00	0.10
H	0.010	-	0.25	-
I	0.004	0.010	0.10	0.25
J	0.031	0.039	0.80	1.00

SOT-363 (REV: R1)

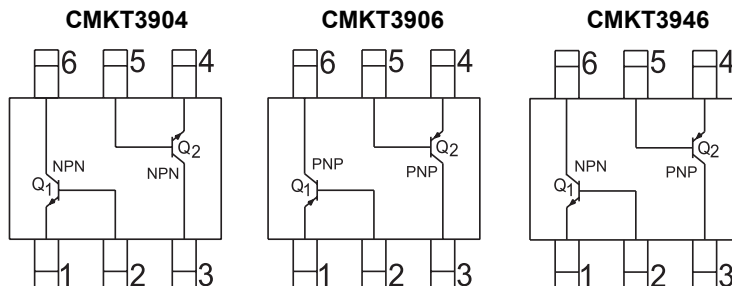

LEAD CODE

- 1) Emitter Q1
- 2) Base Q1
- 3) Collector Q2
- 4) Emitter Q2
- 5) Base Q2
- 6) Collector Q1

R0 (11-October 2001)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.