

DBL 567

TONE DECODER

The DBL567 is general purpose tone decoders designed to provide a saturated transistor switch to ground when an input signal is present within the passband.

FEATURES

- Logic compatible output with 100mA current sinking capability
- 20 to 1 frequency range with an external resistor
- Bandwidth adjustable from 0 to 14%
- High rejection of out of band signals and noise
- Immunity to false signals.
- Highly stable center frequency
- Center frequency adjustable from 0.01Hz to 500KHz


APPLICATIONS

- Touch tone decoding
- Precision oscillator
- Frequency monitoring and control
- Wide band FSK demodulation
- Ultrasonic controls
- Carrier current remote controls
- Communications paging decoders

MAXIMUM RATINGS


Characteristic	Rating	Unit
Supply Voltage	10	V
Power Dissipation*	300	mW
V_8	15	V
V_3	-10	V
V_3	$V_8 + 0.5$	V
Storage Temperature	-55 ~ +150	°C

* The maximum junction temperature is 150°C. The device must be derated based on a thermal resistance of 187°C/W, junction to ambient.

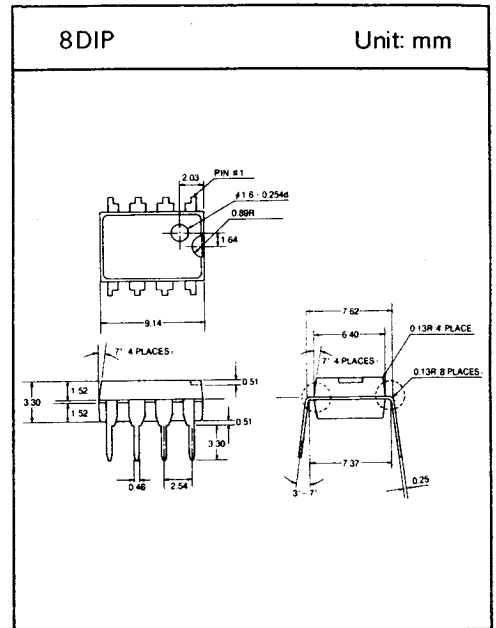

DBL 567

□ BLOCK DIAGRAM



1. OUTPUT FILTER
2. LOOP FILTER
3. INPUT
4. V_{CC}
5. TIMING RESISTOR
6. TIMING CAPACITOR
7. GND
8. OUTPUT


□ ELECTRICAL CHARACTERISTICS (AC Test Circuit, $T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$)

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply Voltage Range	V_{CC}	—	4.75	5	9	V
Power Supply Current Quiescent	I_{CCQ}	$R_L = 20\text{K}\Omega$	—	6	8	mA
Power Supply Current Activated	I_{CC}	$R_L = 20\text{K}\Omega$	—	11	13	mA
Input Resistance	R_{IN}	—	15	20	25	$\text{K}\Omega$
Smallest Detectable Input Voltage	V_{IN-1}	$I_L = 100\text{mA}$, $f = f_0$	—	20	25	mV_{rms}
Largest No Output Input Voltage	V_{IN-2}	$I_C = 100\text{mA}$, $f = f_0$	10	15	—	mV_{rms}
Largest Simultaneous Outband Signal to Inband Signal Ratio	S_i/S_o	—	—	6	—	dB
Minimum Input Signal to Wideband Noise Ratio	S/N	$B_n = 140\text{KHz}$	—	-6	—	dB
Largest Detection Bandwidth	B.W	—	10	14	18	% of f_0
Largest Detection Bandwidth Skew	$B.W_s$	—	—	2	3	% of f_0
Largest Detection Bandwidth Variation with Temperature	$B.W_T$	—	—	± 0.1	0.25	%/°C
Largest Detection Bandwidth Variation with Supply voltage	$B.W_V$	4.75V ~ 6.75V	—	± 1	± 2	%/V
Highest Center Frequency	f_{O-H}	—	100	500	—	KHz
Center Frequency Stability	f_{O-S}	$0^\circ\text{C} < T_a < 70^\circ\text{C}$	—	35 ± 60	—	ppm/°C
		$-55^\circ\text{C} < T_a < +125^\circ\text{C}$	—	35 ± 140	—	ppm/°C
Center Frequency shift with supply voltage	f_{O-V}	4.75V ~ 6.75V	—	0.5	2	%/V
Fastest ON-OFF Cycling Rate	CR_{ON-OFF}	—	—	$f_0/20$	—	—
Output Leakage Current	I_{LEAK}	$V_B = 15\text{V}$	—	0.01	25	μA
Output Saturation Voltage	V_{SAT}	$V_{IN} = 25\text{mV}_{\text{rms}}$, $I_B = 30\text{mA}$	—	0.2	0.4	V
		$V_{IN} = 25\text{mV}_{\text{rms}}$, $I_B = 100\text{mA}$	—	0.6	1	V
Output Fall Time	t_F	—	—	30	—	nS
Output Rise Time	t_R	—	—	150	—	nS


DBL 567

TYPICAL PERFORMANCE CHARACTERISTICS


$I_{CC} - V_{CC}$




$BW - f_o$




$BW (C_2, C_3 \text{ Function})$

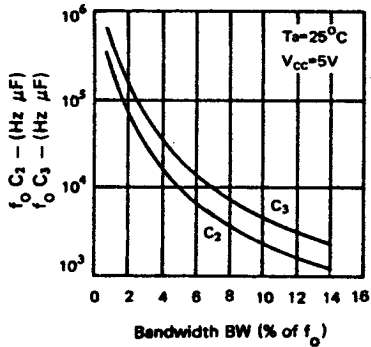

$V_{IN} - BW$

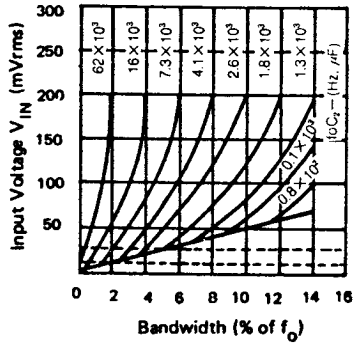


TEST CIRCUIT

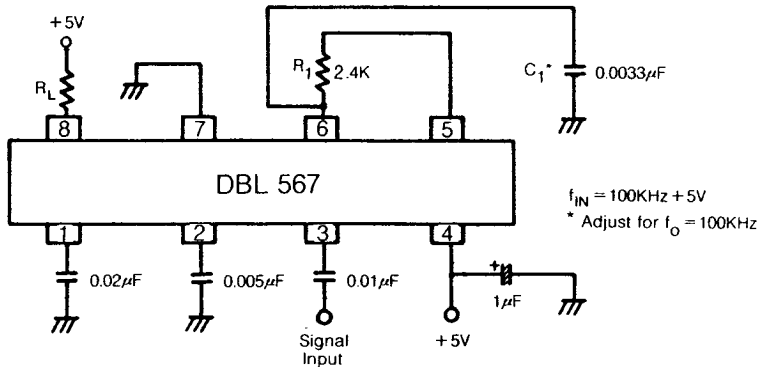


DBL 567

APPLICATIONS


1. Oscillator with Quadrature Output

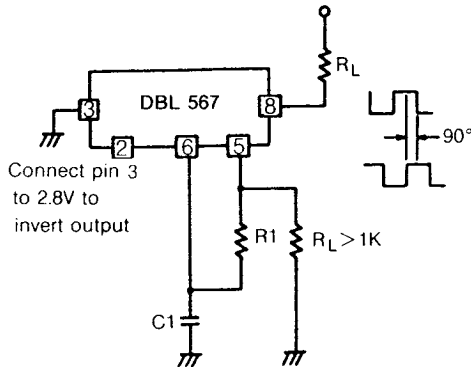

2. Oscillator with Double Frequency Output

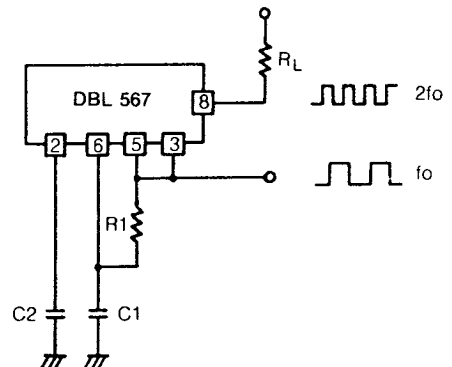

3. Precision Oscillator to switch 100mA Loads

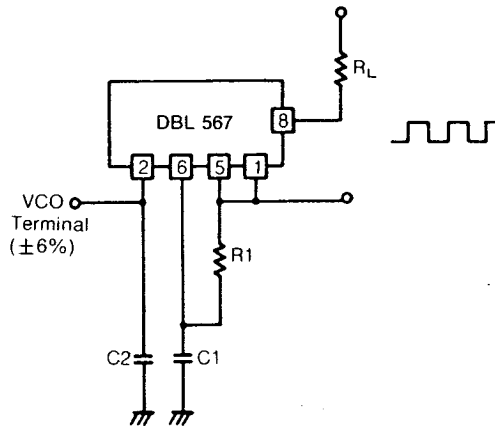

* The center frequency of the tone decoder is equal to the free running frequency of the VCO. This is given by

$$f_o \approx \frac{1}{1.1R_1C_1}$$

The bandwidth of the filter may be found from the approximation

$$B.W = 1070 \sqrt{\frac{V_{IN}}{f_o C_2}} \text{ in \% of } f_o$$

where

V_{IN} = Input voltage (volts rms), $V_{IN} \leq 200mV_{rms}$

C_2 = Capacitance at Pin 2 (μF)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.