

## GENERAL DESCRIPTION

The EM92600/1C series are developed for 45/48 MHz of 10 channels band frequency of cordless telephone which is used in Mainland China. These devices are dual phase-locked loop frequency synthesizers contained ROM counters for receive and transmit loops with two independent phase detect circuits. A common reference oscillator and reference divider are share by the receive and transmit circuits.


Other features include a lock detect circuit for the transmit loop, illegal code default, a buffered oscillator output for mixing purposes in the system, 5KHz tone output . The EM92601C is designed for easy MPU interface. It provides the same features as the EM92600C , but accepts channel programming via a clocked, serial input instead of parallel BCD inputs. The EM92600C is selected channels via mechanical switches of parallel BCD input.

## FEATURES



- Include oscillation circuit with external X-TAL (10.240 MHz).
- Unlock detector.
- 5KHz output for guard tone.
- Standby mode for power saving.
- 2.5 to 5.5V supply range.
- Baseset/Handset changeable.
- Available in 16 pin DIP or SOP.
- SERIES

Part Number	Package	Channel Selection
EM92600CP	DIP	parallel
EM92600CM	SOP	parallel
EM92601CP	DIP	serial
EM92601CM	SOP	serial

## PIN ASSIGNMENTS

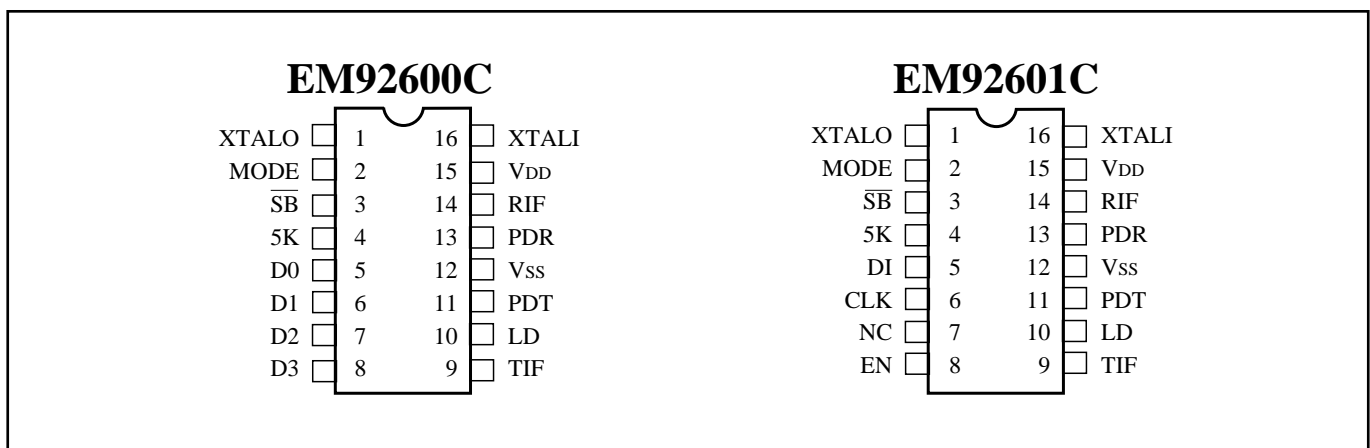

### FUNCTIONAL BLOCK DIAGRAM

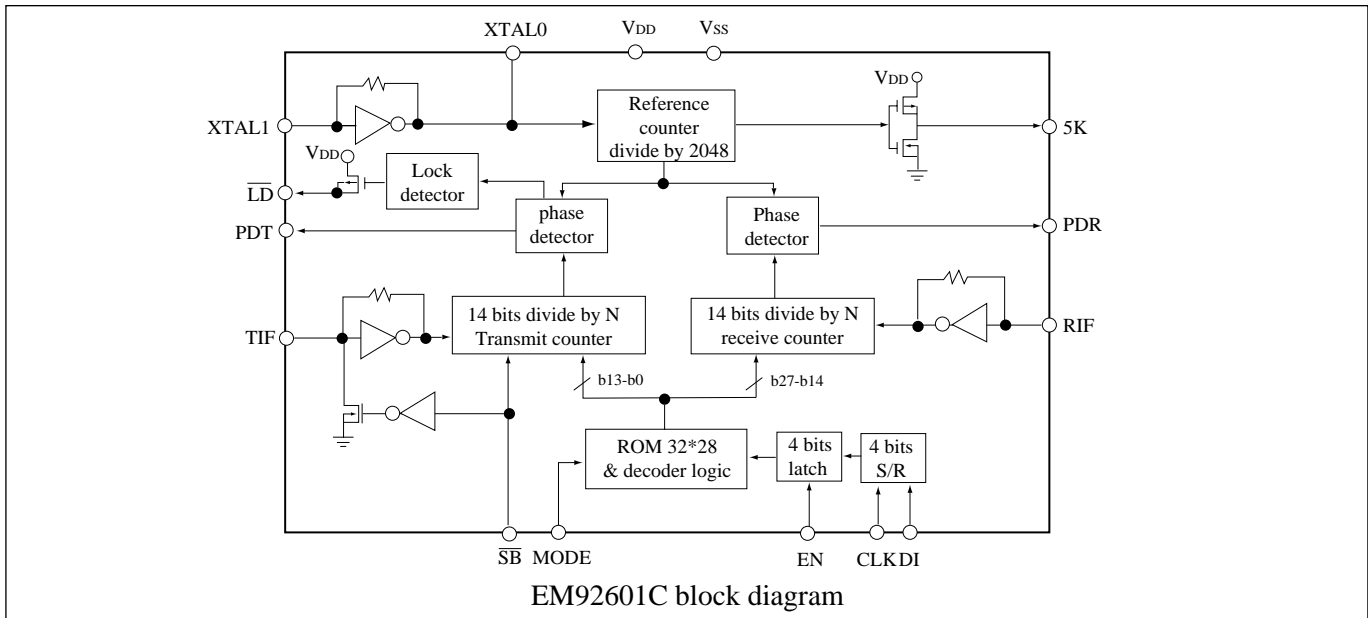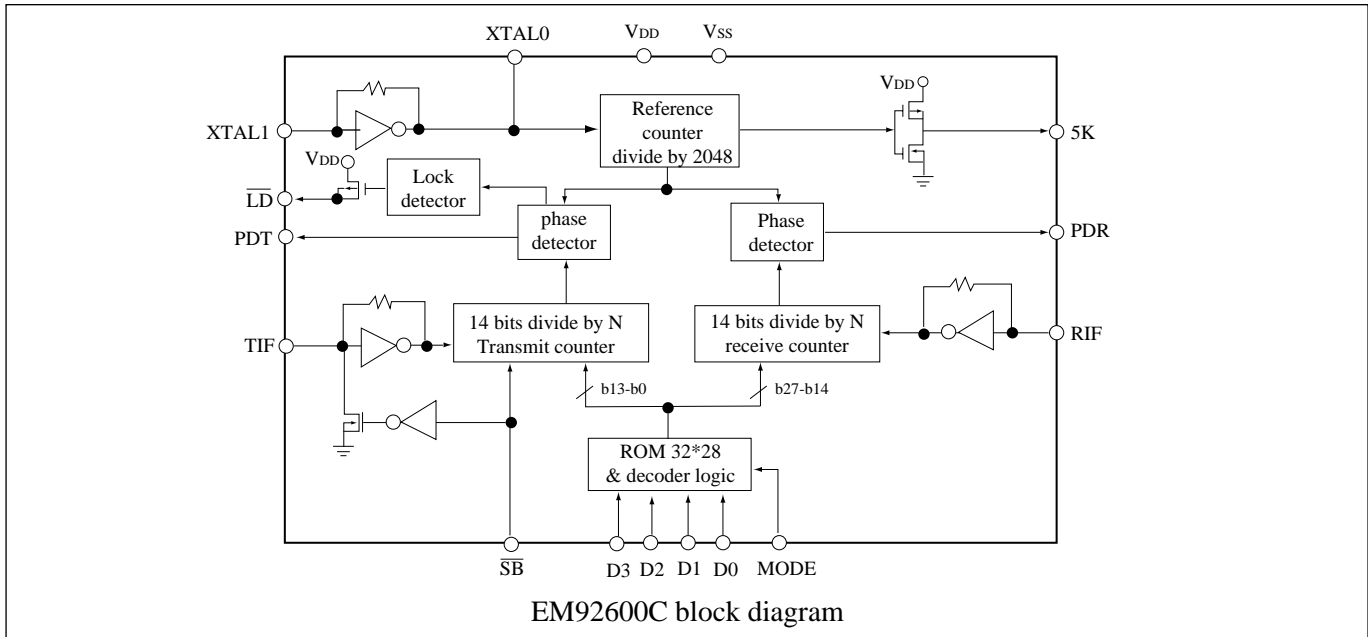

### PIN DESCRIPTIONS

Symbol	Pin No.	Function
XTALO	O	This output generates reference frequency when it is connected to pin 16 with external OSC of which frequency is 10.240MHz
MODE	I	Base/remote changing. Internal pull down. $V_{DD}$ =base, $V_{SS}$ =remote.
$\overline{SB}$	I	The standby pin is used to save power when no transmit. Internal pull down. High: transmit and receive active Low: receive acts only
5K	O	The signal derived from the reference oscillator. 5KHz output.

\* This specification are subject to be changed without notice.

Symbol	I/O	Function
D0	I	The channel selected pin. LSB.(internal pull down)
D1	I	The channel selected pin. (internal pull down)
D2	I	The channel selected pin. (internal pull down)
D3	I	The channel selected pin. MSB.(internal pull down)
Di	I	The serial input data pin.
CLK	I	Clock input. Each low to high transition of the clock shifts one bit of data into the on-chip shift register.
NC	-	Not connect.
EN	I	The enable pin controls the data transfer from the shift register to the 4-bit latch. A low to high transition latches the data.
TIF	I	Input to programmable divider of Tx. AC coupling with VCO. Min input voltage is 200mVp-p.
$\overline{\text{LD}}$	O	Unlock detector output. $V_{DD}$ level: unlock.
PDT	O	Phase detector output for Tx. PDT detects the phase error from Tx PLL and its output is connected to external low pass filter.
$V_{SS}$	-	Ground.
PDR	O	Phase detector output for Rx. PDR detects the phase error from Rx PLL and its output is connected to external low pass filter.
RIF	I	Input of programmable divider for Rx.AC coupling with VCO. Min input voltage is 200mVp-p.
$V_{DD}$	-	Power supply.
XTAL1	I	To connect crystal ( 10.240MHz ) and capacitor.

### ABSOLUTE MAXIMUM RATINGS

Symbol	Rating	Value	Unit
$V_{DD}$	DC supply voltage	-0.5 to +6	V
$V_{IN}$	Input voltage	-0.5 to $V_{DD}+0.5$	V
$I_{IN}, I_{OUT}$	DC current drain per pin	10.0	mA
$I_{DD}, I_{SS}$	DC current drain $V_{DD}$ or $V_{SS}$ pins	30.0	mA
$T_A$	Operating temperature range	-30 to +75	°C
$T_{STG}$	Storage temperature range	-65 to +150	°C

## DC ELECTRICAL CHARACTERISTICS

( $T_A = 25^\circ\text{C}$  unless otherwise noted )

Parameter	Sym.	Min.	Typ.	Max.	Unit	Condition
Operating voltage	$V_{DD}$	2.5	-	5.5	V	
Input voltage	$V_{IL}$ $V_{IH}$	2.2	-	0.8	V	$V_{DD}=3\text{V}$
Output voltage	$V_{OL}$ $V_{OH}$	2.95	-	0.05	V	$V_{DD}=3\text{V}$
Input low current	$I_{IL}$	-36 -0.06	- -		$\mu\text{A}$	$v_{IL}=0$ pin 16,14,9 pin 2~8
Input high current	$I_{IH}$		- -	36 120	$\mu\text{A}$	$v_{IH}=V_{DD}-0.5\text{V}$ pin 16,14,9 pin 2~8
Output current	$I_{OH}$ $I_{OL}$	-0.2 0.2	- -		mA	$V_{OH}=2.6\text{V}$ $V_{OL}=0.4\text{V}$
Standby current	$I_{DS}$		-	1.5	mA	$V_{DD}=3\text{V}$ , note1
Operating current (0.2Vp-p input at RIF,TIF)	$I_{DO}$		-	3.0	mA	$V_{DD}=3\text{V}$ , note2
3-state leakage current	$I_{OZ}$		-	$\pm 1$	$\mu\text{A}$	$V_{DD}=5\text{V}$


Note 1: XTALin: 10.24MHz ; MODE: $V_{DD}$ ;  $\overline{\text{SB}}$ : $V_{SS}$ ; TIF=20MHz(200 mVp-p); RIF=40MHz(200 mVp-p); others are open.

Note 2: XTALin: 10.24MHz ; MODE: $V_{DD}$ ;  $\overline{\text{SB}}$ : $V_{DD}$ ; TIF=20MHz(200 mVp-p); RIF=40MHz(200 mVp-p); others are open.


## AC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	Min.	Typ.	Max.	Unit	Condition
Output rise time	$T_R$			200	nS	$V_{DD}=3\text{V}$
Output fall time	$T_F$			200	nS	$V_{DD}=3\text{V}$
Input rise and fall time	$T_R$ $T_F$			5	$\mu\text{S}$	XTAL1 $V_{DD}=3\text{V}$
Maximum frequency input =sine wave 0.2Vp-p OSC in	$F_{MAX}$			12 50 50	MHz	XTAL1 RIF ( $V_{DD}=3\text{V}$ ) TIF
Setup time data to clock Enable to clock	$T_{SU}$	100 200			nS	EM92601C only
Hold time clock to data	$T_H$	80			nS	EM92601C only
Recovery time Enable to clock	$T_{REC}$	80			nS	EM92601C only
Input pulse width clock and Enable	$T_W$	80			nS	EM92601C only

**TIMING DIAGRAM**

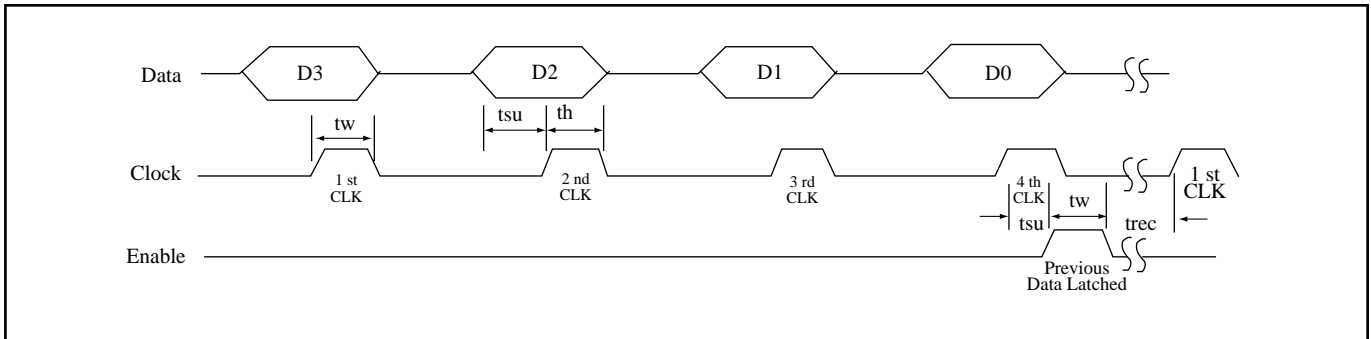


EM92601C Timing

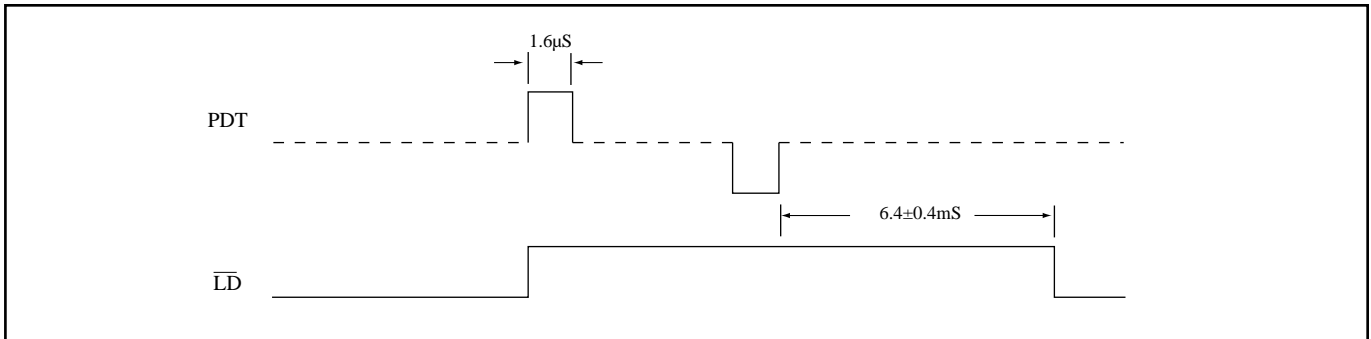

Unlock Timing

**APPLICATION CIRCUIT**

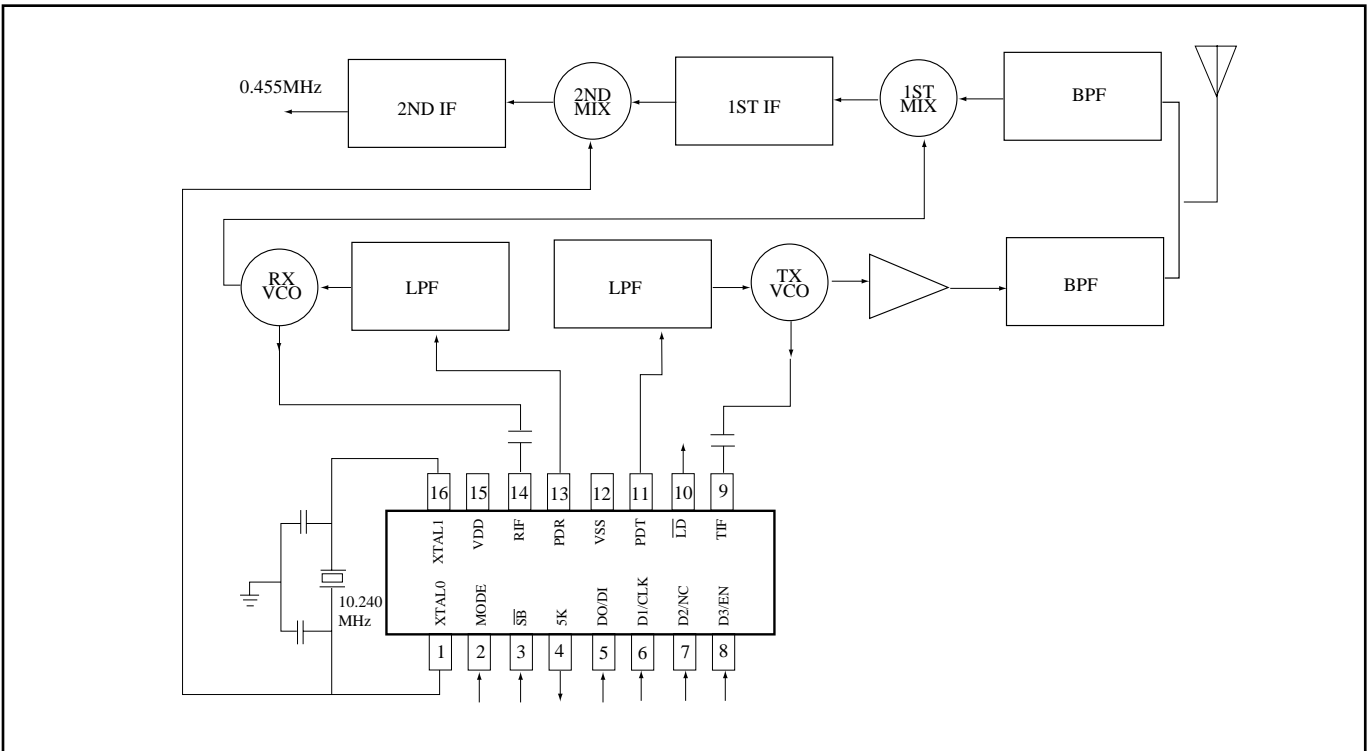

### DIVIDE RATIO AND VCO FREQUENCIES

Base (MODE=1)	Input				CH	Rx (Fref=5KHz)			Tx=(Fref=5KHz)		
	D3	D2	D1	D0		FRx (MHz)	FVCO(MHz)	N	FTx(MHz)	FVCO(MHz)	N
	0	0	0	1	1	48.250	37.555	7511	45.250	45.250	9050
	0	0	1	0	2	48.275	37.580	7516	45.275	45.275	9055
	0	0	1	1	3	48.300	37.605	7521	45.300	45.300	9060
	0	1	0	0	4	48.325	37.630	7526	45.325	45.325	9065
	0	1	0	1	5	48.350	37.655	7531	45.350	45.350	9070
	0	1	1	0	6	48.375	37.680	7536	45.375	45.375	9075
	0	1	1	1	7	48.400	37.705	7541	45.400	45.400	9080
	1	0	0	0	8	48.425	37.730	7546	45.425	45.425	9085
	1	0	0	1	9	48.450	37.755	7551	45.450	45.450	9090
	1	0	1	0	10	48.475	37.780	7556	45.475	45.475	9095
	1	0	1	1		48.475	37.780	7556	45.475	45.475	9095
	1	1	0	0		48.475	37.780	7556	45.475	45.475	9095
	1	1	0	1		48.475	37.780	7556	45.475	45.475	9095
	1	1	1	0		48.475	37.780	7556	45.475	45.475	9095
	1	1	1	1		48.475	37.780	7556	45.475	45.475	9095
	0	0	0	0		48.475	37.780	7556	45.475	45.475	9095

REMOTE (MODE=0)	Input				CH	Rx (Fref=5KHz)			Tx=(Fref=5KHz)		
	D3	D2	D1	D0		FRx (MHz)	FVCO(MHz)	N	FTx(MHz)	FVCO(MHz)	N
	0	0	0	1	1	45.250	34.555	6911	48.250	48.250	9650
	0	0	1	0	2	45.275	34.580	6916	48.275	48.275	9655
	0	0	1	1	3	45.300	34.605	6921	48.300	48.300	9660
	0	1	0	0	4	45.325	34.630	6926	48.325	48.325	9665
	0	1	0	1	5	45.350	34.655	6931	48.350	48.350	9670
	0	1	1	0	6	45.375	34.680	6936	48.375	48.375	9675
	0	1	1	1	7	45.400	34.706	6941	48.400	48.400	9680
	1	0	0	0	8	45.425	34.730	6946	48.425	48.425	9685
	1	0	0	1	9	45.450	34.755	6951	48.450	48.450	9690
	1	0	1	0	10	45.475	34.780	6956	48.475	48.475	9695
	1	0	1	1		45.475	34.780	6956	48.475	48.475	9695
	1	1	0	0		45.475	34.780	6956	48.475	48.475	9695
	1	1	0	1		45.475	34.780	6956	48.475	48.475	9695
	1	1	1	0		45.475	34.780	6956	48.475	48.475	9695
	1	1	1	1		45.475	34.780	6956	48.475	48.475	9695
	0	0	0	0		45.475	34.780	6956	48.475	48.475	9695



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.