

# SOT223 PNP SILICON PLANAR SWITCHING TRANSISTOR

## FZT2907 FZT2907A


ISSUE 4 – JUNE 1996



### FEATURES

- \* 60 Volt  $V_{CEO}$
- \* Fast switching

PARTMARKING DETAIL – FZT2907 – FZT2907  
FZT2907A – FZT2907A



### ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	FMMT2907	FMMT2907A	UNIT
Collector-Base Voltage	$V_{CBO}$	-60		V
Collector-Emitter Voltage	$V_{CEO}$	-40	-60	V
Emitter-Base Voltage	$V_{EBO}$	-5		V
Continuous Collector Current	$I_C$	-600		mA
Power Dissipation at $T_{amb}=25^\circ\text{C}$	$P_{tot}$	1.5		mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150		$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	FZT2907		FZT2907A		UNIT	CONDITIONS.
		MIN.	MAX.	MIN.	MAX.		
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-40		-60		V	$I_C = -10\mu\text{A}, I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-60		-60		V	$I_C = -10\text{mA}, I_B = 0^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5		-5		V	$I_E = -10\mu\text{A}, I_C = 0$
Collector-Emitter Cut-Off Current	$I_{CEX}$		-50		-50	nA	$V_{CE} = -30\text{V}, V_{BE} = -0.5\text{V}$
Collector Cut-Off Current	$I_{CBO}$		-20 -20		-10 -10	nA $\mu\text{A}$	$V_{CB} = -50\text{V}, I_E = 0$ $V_{CB} = -50\text{V}, I_E = 0, T_{amb} = 150^\circ\text{C}$
Base Cut-Off Current	$I_B$		-50		-50	nA	$V_{CE} = -30\text{V}, V_{BE} = -0.5\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.4 -1.6		-0.4 -1.6	V V	$I_C = -150\text{mA}, I_B = -15\text{mA}^*$ $I_C = -500\text{mA}, I_B = -50\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-1.3 -2.6		-1.3 -2.6	V V	$I_C = -150\text{mA}, I_B = -15\text{mA}^*$ $I_C = -500\text{mA}, I_B = -50\text{mA}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	35 50 75 100 30	300	75 100 100 300 50			$I_C = -0.1\text{mA}, V_{CE} = -10\text{V}$ $I_C = -1\text{mA}, V_{CE} = -10\text{V}$ $I_C = -10\text{mA}, V_{CE} = -10\text{V}$ $I_C = -150\text{mA}, V_{CE} = -10\text{V}^*$ $I_C = -500\text{mA}, V_{CE} = -10\text{V}^*$
Transition Frequency	$f_T$	200		200		MHz	$I_C = -50\text{mA}, V_{CE} = -20\text{V}$ $f = 100\text{MHz}$


\*Measured under pulsed conditions. Pulse width=300ms. Duty cycle  $\leq 2\%$

# FZT2907 FZT2907A


## SWITCHING CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	FMMT2907		FMMT2907A		UNIT	CONDITIONS.
		MIN.	MAX.	MIN.	MAX.		
Output Capacitance	$C_{obo}$		8		8	pF	$V_{CE} = -10\text{V}, I_E = 0, f = 100\text{KHz}$
Input Capacitance	$C_{ibo}$		30		30	pF	$V_{BE} = -2\text{V}, I_C = 0, f = 100\text{KHz}$
Turn On Time	$t_{on}$		50		50	ns	$V_{CE} = -30\text{V}, I_C = -150\text{mA}, I_{B1} = -15\text{mA}$ (See Turn On Circuit)
Turn Off Time	$t_{off}$		110		110	ns	$V_{CE} = -6\text{V}, I_C = -150\text{mA}, I_{B1} = I_{B2} = -15\text{mA}$ (See Turn Off Circuit)

### TURN ON TIME – TEST CIRCUIT

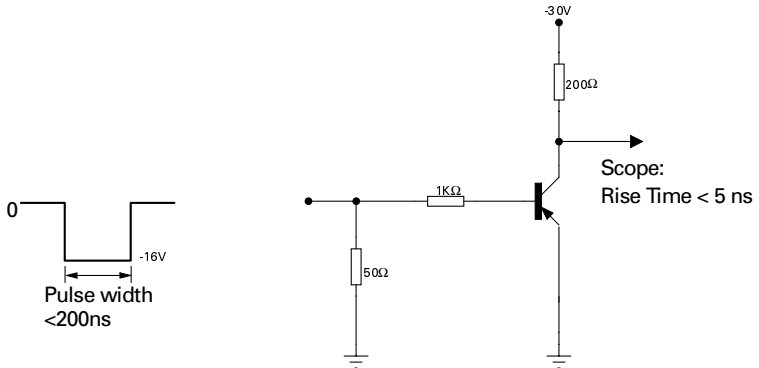

### TURN OFF TIME – TEST CIRCUIT

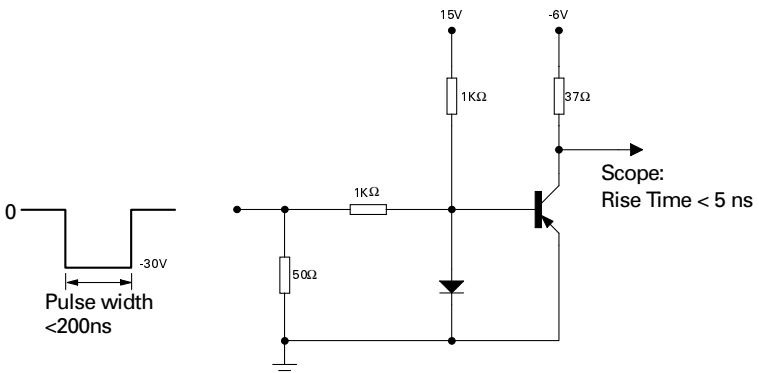



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.