

1N4454 SIGNAL DIODE


Absolute Maximum Ratings (Ta=25°C)

Items	Symbol	Ratings	Unit
Reverse Voltage	VR	75	V
Reverse Recovery Time	trr	4	ns
Power Dissipation 3.33mW/°C (25°C)	P	400	mW
Forward Current	IF	225	mA
Junction Temp.	Tj	-65 to 175	°C
Storage Temp.	Tstg	-65 to 175	°C

Mechanical Data

Items	Materials
Package	DO-35
Case	Hermetically sealed glass
Lead/Finish	Double stud/Solder Plating
Chip	Glass Passivated

Dimensions (DO-35)

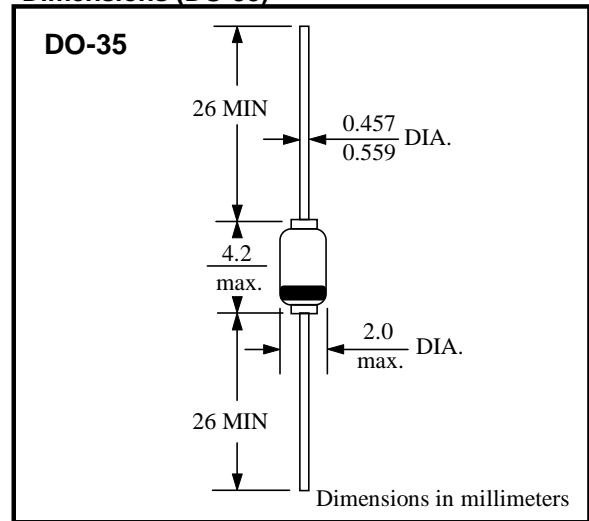

Electrical Characteristics (Ta=25°C)

Ratings	Symbol	Ratings	Unit
Minimum Breakdown Voltage IR= 5.0uA IR= 100uA	BV	75 100	V
Peak Forward Surge Current PW= 1sec.	IFsurge	0.5	A
Maximum Forward Voltage IF= 10mA	VF	1.0	V
Maximum Reverse Current VR= 50V VR= 50V, Tj= 150°C	IR	0.10 100.0	uA
Maximum Junction Capacitance VR= 0, f= 1 MHz	Cj	4	pF
Maximum Reverse Recovery Time IF= 10mA, VR= 6V, IRR= 1mA, RL= 100Ω	trr	4	ns



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.