

FAST-SWITCHING POWER TRANSISTOR



- SGS-THOMSON PREFERRED SALESTYPE
- NPN TRANSISTOR
- $h_{FE} > 10$ AT $I_C = 35A$
- HIGH EFFICIENCY SWITCHING
- VERY LOW SATURATION VOLTAGE
- RECTANGULAR SAFE OPERATING AREA
- WIDE ACCIDENTAL OVERLOAD AREA

APPLICATIONS

- UNINTERRUPTABLE POWER SUPPLY
- SWITCH MODE POWER SUPPLIES
- MOTOR CONTROL

DESCRIPTION

The BUT92 is a Multiepitaxial Planar NPN Transistor in TO-3 package. It is intended for use in high frequency and efficiency converters, switching regulators and motor control.

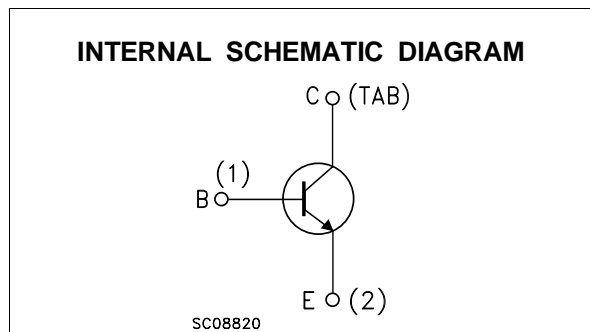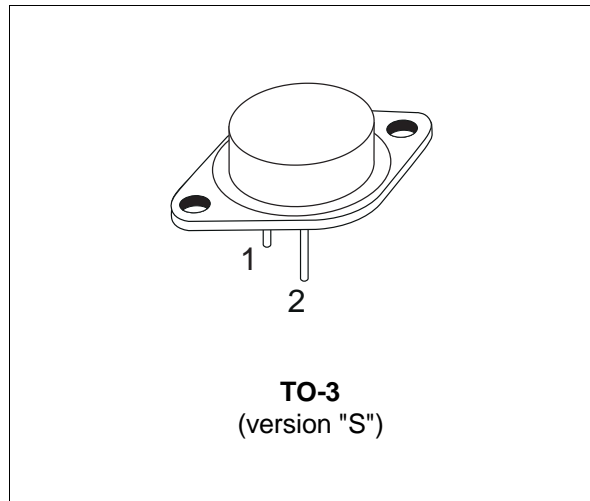

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CEV}	Collector-Emitter Voltage ($V_{BE} = -1.5 V$)	350	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	250	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	7	V
I_E	Emitter Current	50	A
I_{EM}	Emitter Peak Current	75	A
I_B	Base Current	10	A
I_{BM}	Base Peak Current	15	A
P_{tot}	Total Power Dissipation at $T_{case} \leq 25 ^\circ C$	250	W
T_{stg}	Storage Temperature	-65 to 200	$^\circ C$
T_j	Junction Temperature	200	$^\circ C$

BUT92

THERMAL DATA

$R_{thj-case}$	Thermal Resistance Junction-case	Max	0.7	$^{\circ}C/W$
----------------	----------------------------------	-----	-----	---------------

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CER}	Collector Cut-off Current ($R_{BE} = 10 \Omega$)	$V_{CE} = V_{CEV}$ $V_{CE} = V_{CEV} \quad T_c = 100^{\circ}C$			0.4 4	mA mA
I_{CEV}	Collector Cut-off Current	$V_{CE} = V_{CEV} \quad V_{BE} = -1.5V$ $V_{CE} = V_{CEV} \quad V_{BE} = -1.5V \quad T_c = 100^{\circ}C$			0.2 2	mA mA
I_{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 7 V$			1	mA
$V_{CEO(sus)*}$	Collector-Emitter Sustaining Voltage	$I_C = 0.2 A \quad L = 25 mH$	250			V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	$I_E = 50 mA$	7			V
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 35 A \quad I_B = 3.5 A$ $I_C = 35 A \quad I_B = 3.5 A \quad T_j = 100^{\circ}C$		0.8 1.25	1.2 1.9	V V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 35 A \quad I_B = 3.5 A$ $I_C = 35 A \quad I_B = 3.5 A \quad T_j = 100^{\circ}C$		1.2 1.2	1.5 1.5	V V
di_c/dt	Rated of Rise on-state Collector Current	$V_{CC} = 200V \quad I_{B1} = 5.25 A \quad R_C = 0$ $t_p = 3\mu s \quad T_j = 100^{\circ}C$	125	200		A/ μs
$V_{CE(3\mu s)*}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 200V \quad I_{B1} = 5.25 A$ $R_C = 5.7 \Omega \quad T_j = 100^{\circ}C$		3	6	V
$V_{CE(5\mu s)*}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 200V \quad I_{B1} = 5.25 A$ $R_C = 5.7 \Omega \quad T_j = 100^{\circ}C$		1.8	3	V


INDUCTIVE LOAD

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
t_s	Storage Time	$V_{CC} = 200 V \quad V_{Clamp} = 250 V$		1.4	3	μs
t_f	Fall Time	$I_C = 35 A \quad I_{B1} = 3.5 A$		0.15	0.4	μs
t_c	Crossover Time	$V_{BB} = -5 V \quad L_C = 0.28 mH$ $R_{B2} = 0.7 \Omega \quad T_j = 100^{\circ}C$		0.3	0.7	μs
V_{CEW}	Maximum Collector Emitter Voltage without Snubber	$V_{CC} = 50 V \quad I_{Cwoff} = 52 A$ $V_{BB} = -5 V \quad I_{B1} = 3.5 A$ $L_C = 48 \mu H \quad R_{B2} = 0.7 \Omega$ $T_j = 125^{\circ}C$	250			V

* Pulsed : Pulse duration = 300 μs , duty cycle = 2%

TO-3 (version S) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	11.00		13.10	0.433		0.516
B	1.47		1.60	0.058		0.063
C	1.50		1.65	0.059		0.065
D	8.32		8.92	0.327		0.351
E	19.00		20.00	0.748		0.787
G	10.70		11.10	0.421		0.437
N	16.50		17.20	0.649		0.677
P	25.00		26.00	0.984		1.023
R	4.00		4.09	0.157		0.161
U	38.50		39.30	1.515		1.547
V	30.00		30.30	1.187		1.193

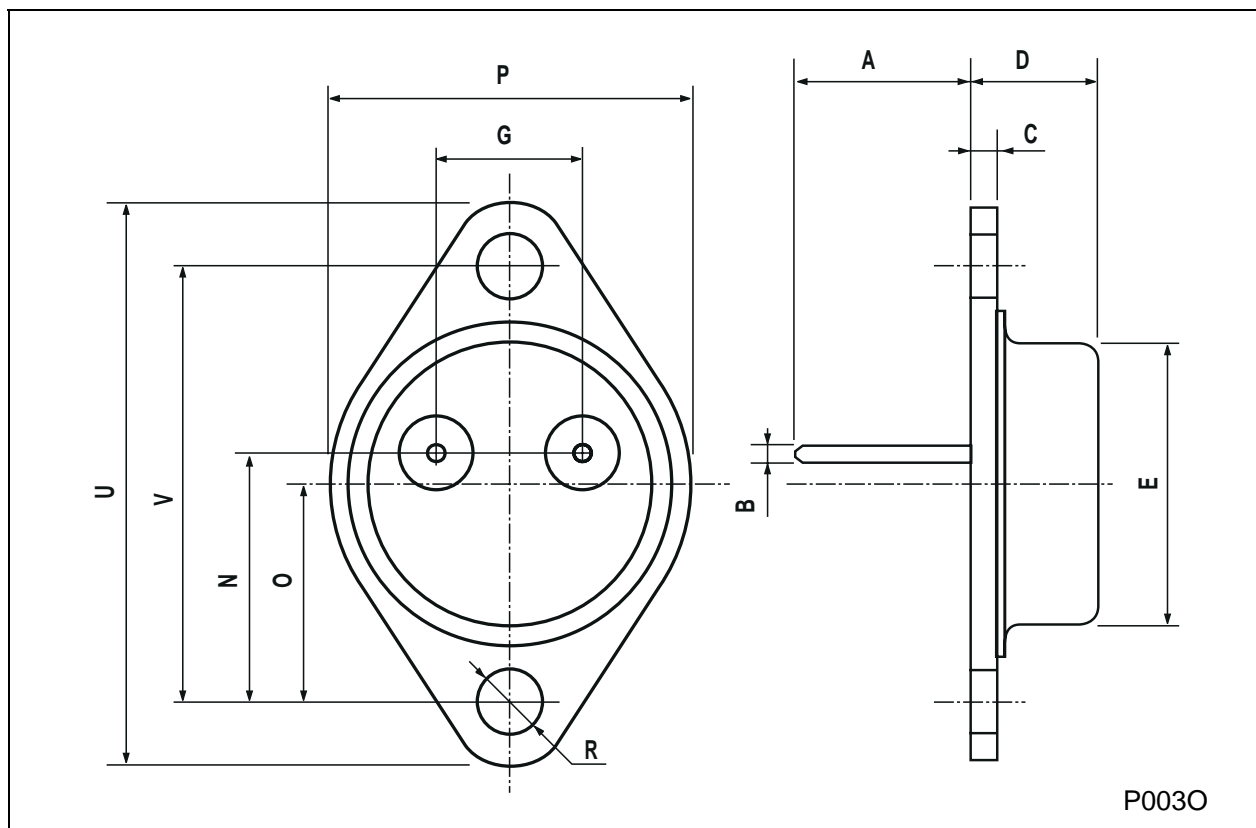

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A
...



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.