

Unipolar Driver ICs

SI-7300A and SI-7330A

■ Ratings

(Ta = 25°C)

Type No.	Supply voltage (V)		Output current (A)	Junction temperature (°C)	Operating ambient temperature (°C)	Storage temperature (°C)
	Vcc1	Vcc2	Io	Tj	Top	Tstg
SI-7300A	48	8	1.7	+125	-20 to +80	-30 to +100
SI-7330A	42	8	3.2	+125	-20 to +80	-30 to +100


■ Characteristics

(Ta = 25°C)


	Electrical charac- teristics	Supply voltage						Output current						Vcc2 input current			Oscillation frequency			External zener diode breakdown voltage (V)		Input excitation signal (active high)									
																						Input voltage (V)				High level input current (mA)					
		(V)						(mA/ø)						(mA)			(kHz)					Low level (OFF)	High level (ON)	Io= 0.5A/ø	Io= 1.0A/ø	Io= 1.5A/ø	Io= 3.0A/ø				
		Vcc1			Vcc2			Io			Iom*			Icc2			F			Vz		VIL	VIH	IIH	IIH	IIH	IIH				
Type No.	min	typ	max	min	typ	max	min	max	min	typ	max	max			min	typ	max	min	max	typ	min	max	min	max	min	max	min	max			
SI-7300A	15	30	42	4.5	5	5.5	200	1500	535	580	625	45			19	21	25	VCC1 +5	70	0.8	2.8	2.2	10.0	3.0	10.0	4.9	10.0				
SI-7330A	15	30	35	4.5	5	5.5	200	3000	535	580	625	45			19	21	25	VCC1	43	0.3	1.8	5	100			15	100	40	100		

* Measurement conditions are as shown in the external connection diagram.

■ Block diagram

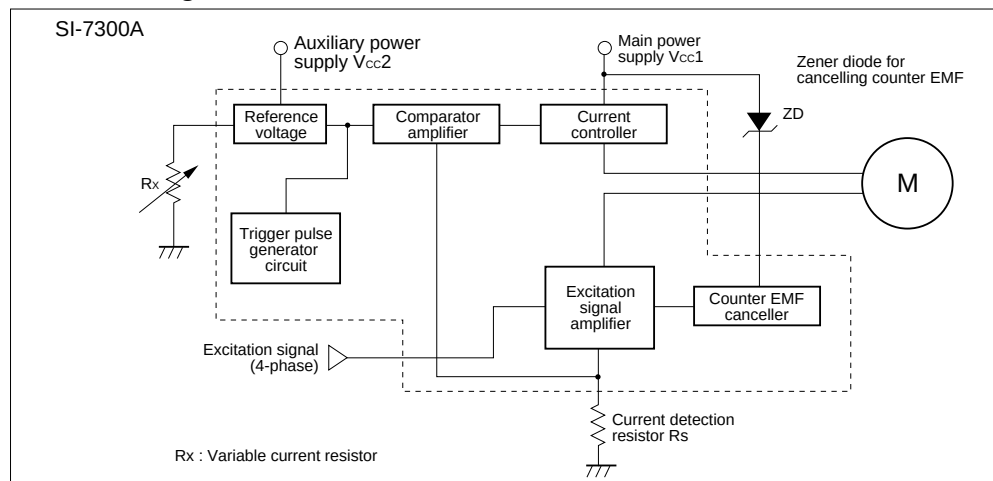


■ External connection diagram

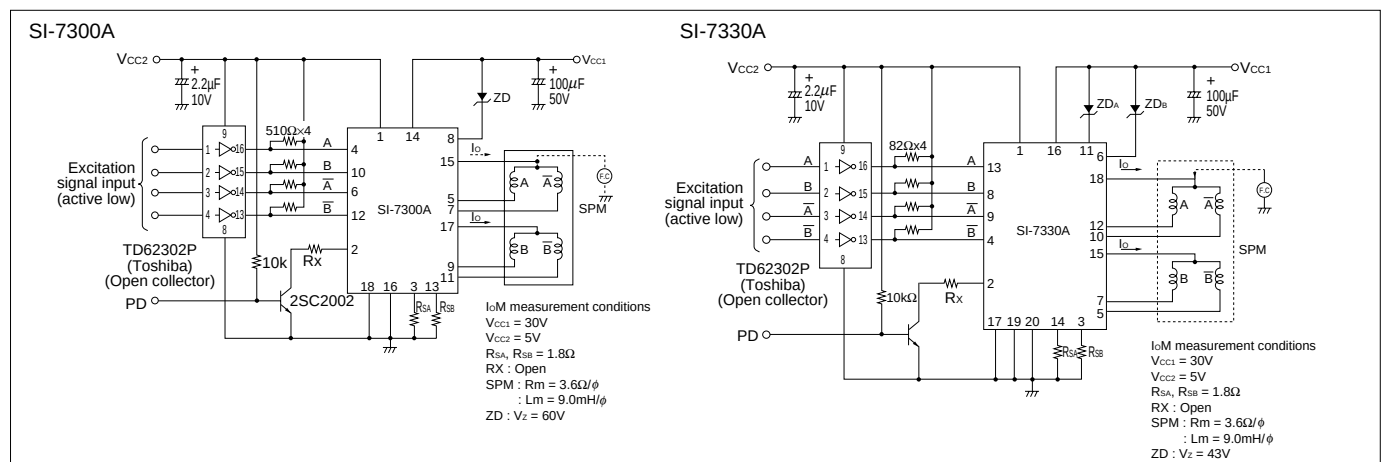


SI-7300 and SI-7330A

■ Equivalent circuit diagram

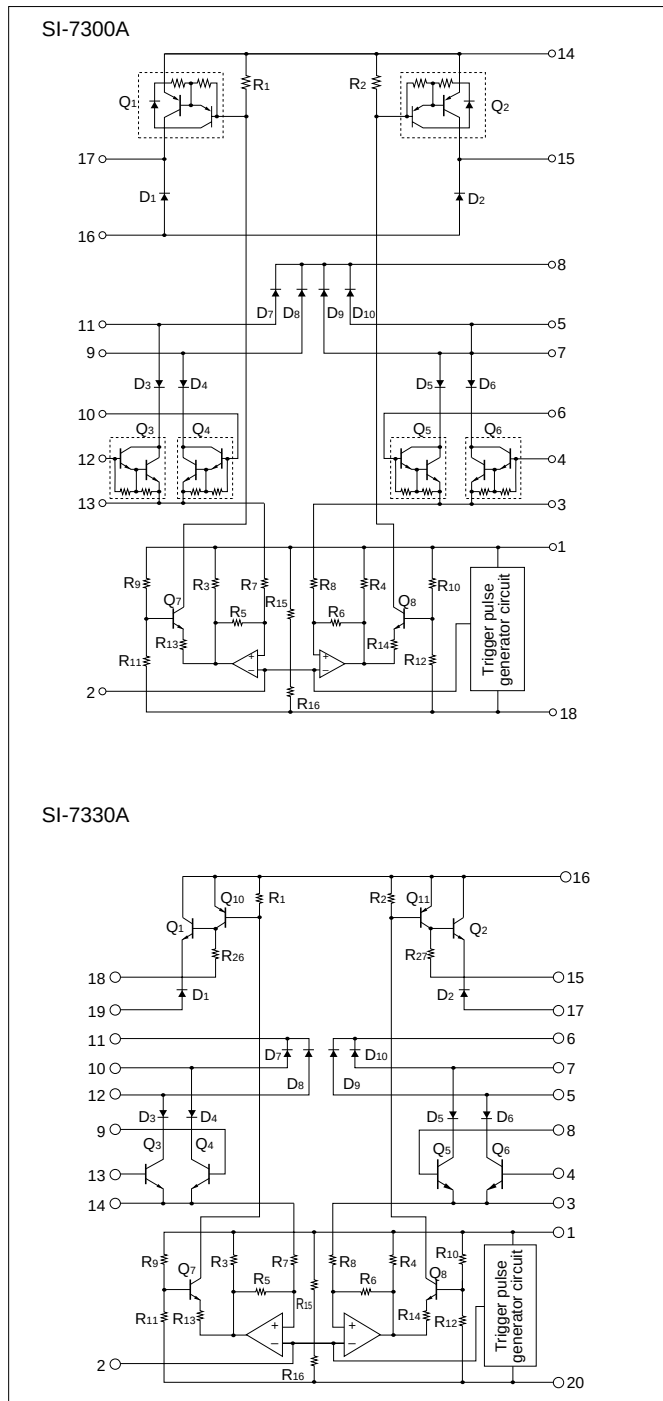


■ Case temperature vs. Output current

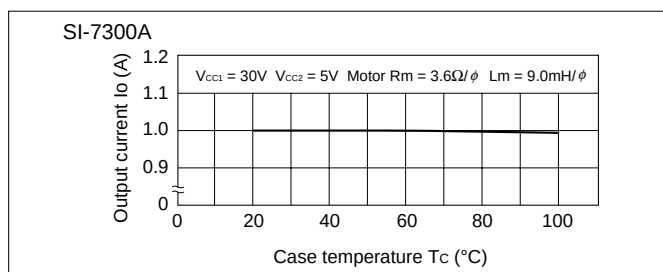


■ External dimensions


(Unit: mm)

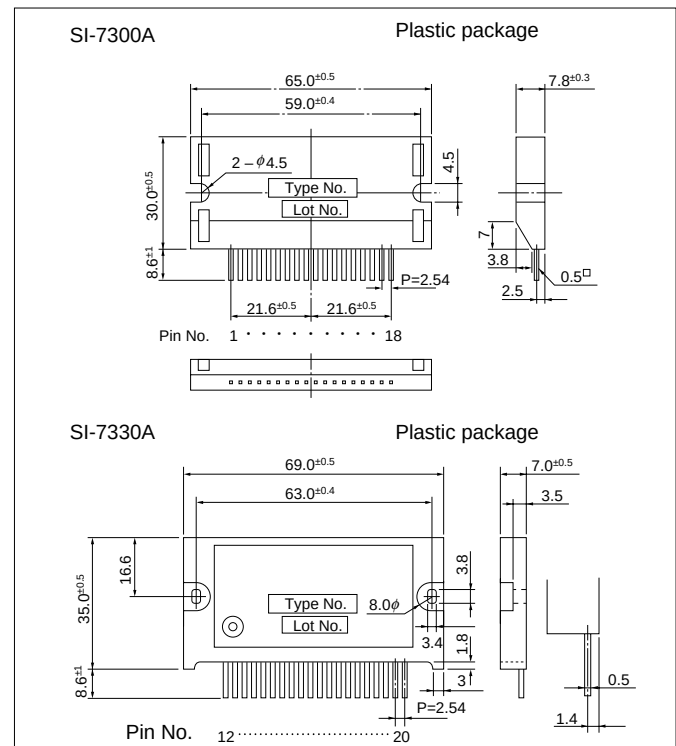

■ Supply voltage vs. Output current

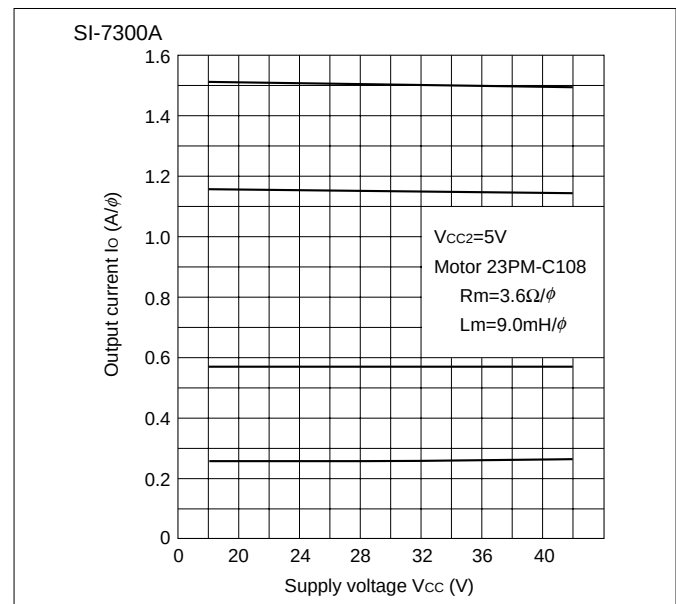

■ Case temperature vs. Chopping frequency

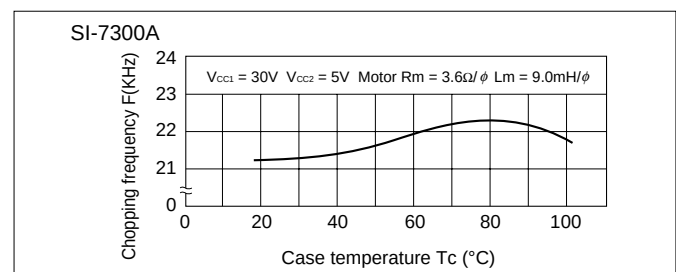

SI-7300 and SI-7330A

Application Note

■ Determining the output current I_O (motor coil current)

The output current, I_O is fixed by the following circuit elements:

- R_S : Current detection resistor
- V_{CC2} : Supply voltage
- R_X : Variable current resistor

To operate a motor at maximum current level, set $R_X =$ infinity (open). Based on the specifications of SI-7300A, its output current I_O can be seen as:




I_O (rms value): 535 to 625 mA

To compute I_O when different values are used for R_S and V_{CC2} , use the approximation formula below. The maximum ripple value I_{OH} of the output current waveform can be computed as follows:

$$I_{OH(max)} \approx \frac{1}{R_S} (0.233 \cdot V_{CC2} - 0.026) \text{ [A]}$$




$$I_{OH(min)} \approx \frac{1}{R_S} (0.214 \cdot V_{CC2} - 0.021) \text{ [A]}$$

The graph of this equation is shown below.

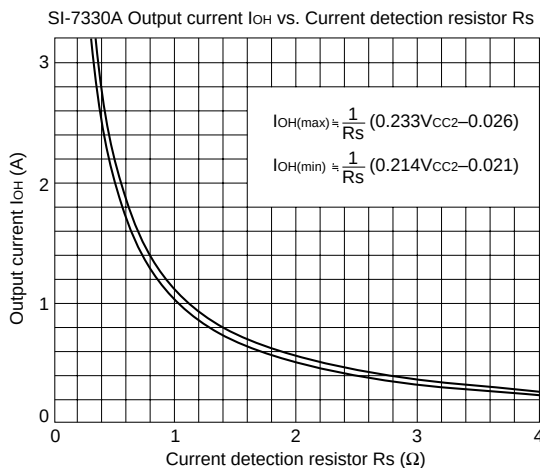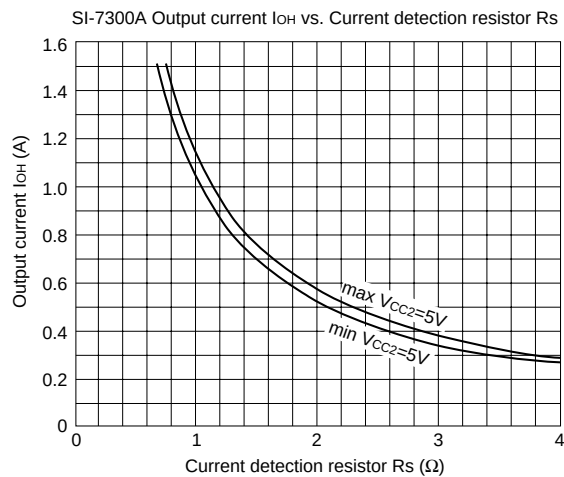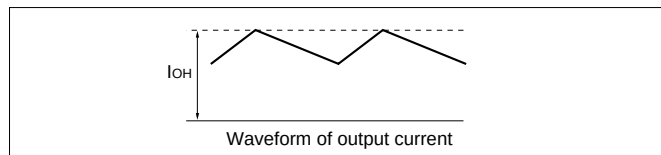


■ Power down mode

The SI-7300A can be operated in power down mode. The circuit is shown below. When transistor Tr is switched on, the reference voltage drops and the output current can be decreased.

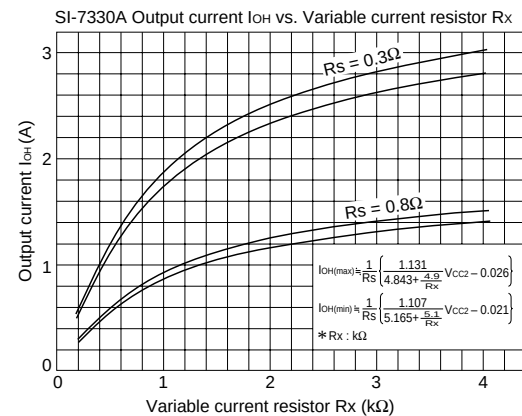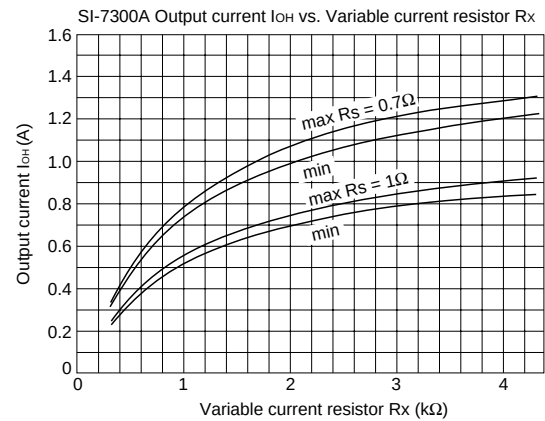

■ Example of a Frequency vs. Torque characteristic

The graph shows the relationship between frequency and pull-out torque of SI-7300A.

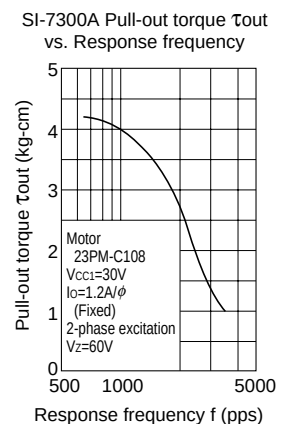

Application Note

■ Thermal design

The procedures for the thermal design of the SI-7300A are as follows:

- (1) As shown in the right figure, the supply current I_{CC1} and the output current I_o are measured at the maximum level of the supply voltage V_{CC1} . However, the motor is in holding mode at the 2-phase excitation.
- (2) From the above measurements, the internal power dissipation (2 phases) of the hybrid IC can be obtained through the following formula.

$$P_{diss} = V_{CC1} \cdot I_{CC1} - 2I_o^2(R_L + R_s)$$


Where R_L : coil resistance of the motor per phase

Shown in the lower graphs are sample calculations of P_{diss} vs. I_o .


- (3) The heatsink area corresponding to the ambient temperature can be obtained from the SI-7300A derating curve shown in the lower right.
- (4) Verify that the temperature of the aluminum base plate of the hybrid IC or adjacent heatsinks is below 85°C (equivalent to max. ambient temperature) when operating under actual conditions.

* For details on thermal design, refer to the technical data.


Method for measuring current SI-7300A

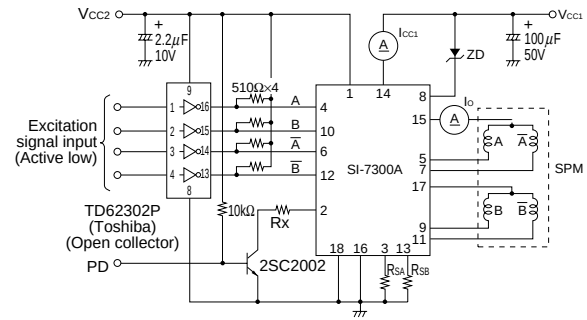


SI-7300A Heat dissipation per phase vs. output current

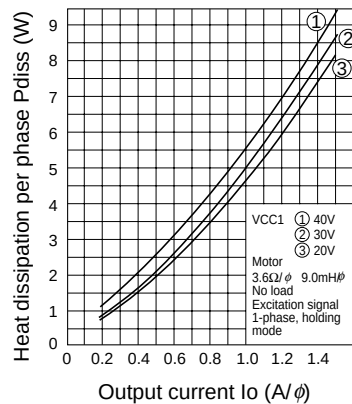

SI-7330A Heat dissipation per phase vs. output current

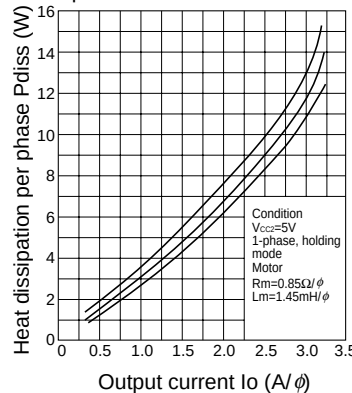

SI-7300A Derating curve

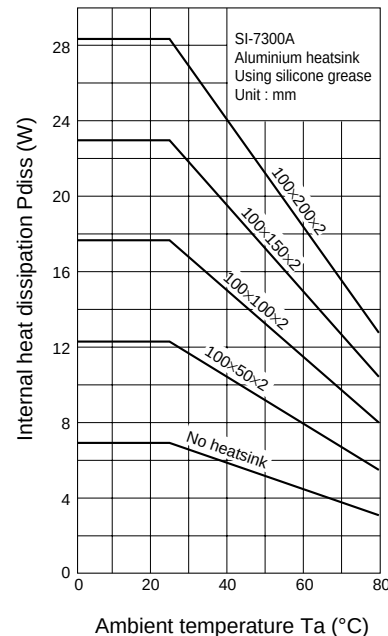

SI-7330A Derating curve

