

FEATURES

- **Guaranteed CTR Symmetry, 2:1 Maximum**
- **Bidirectional AC Input**
- **Industry Standard SOIC-8 Surface Mountable Package**
- **Standard Lead Spacing, .05"**
- **Available in Tape and Reel Option (Conforms to EIA Standard RS481A)**

DESCRIPTION

The IL256A is an AC input phototransistor optocoupler. The device consists of two infrared emitters connected in anti-parallel and coupled to a silicon NPN phototransistor detector.

These circuit elements are constructed with a standard SOIC-8 foot print.

The product is well suited for telecom applications such as ring detection or off/on hook status, given its bidirectional LED input and guaranteed current transfer ratio (CTR) minimum of 20% at $I_F = 10$ mA.

Maximum Ratings

Emitter


Continuous Forward Current..... 60 mA
Power Dissipation at 25°C 90 mW
Derate Linearly from 25°C 0.8 mW/°C

Detector

Collector-Emitter Breakdown Voltage 30 V
Emitter-Collector Breakdown Voltage 5 V
Collector-Base Breakdown Voltage 70 V
Power Dissipation 150 mW
Derate Linearly from 25°C 2.0 mW/°C

Package

Total Package Dissipation at 25°C Ambient (LED + Detector) 240 mW
Derate Linearly from 25°C 3.1 mW/°C
Storage Temperature -55°C to +150°C
Operating Temperature -55°C to +100°C
Soldering Time at 260°C..... 10 sec.

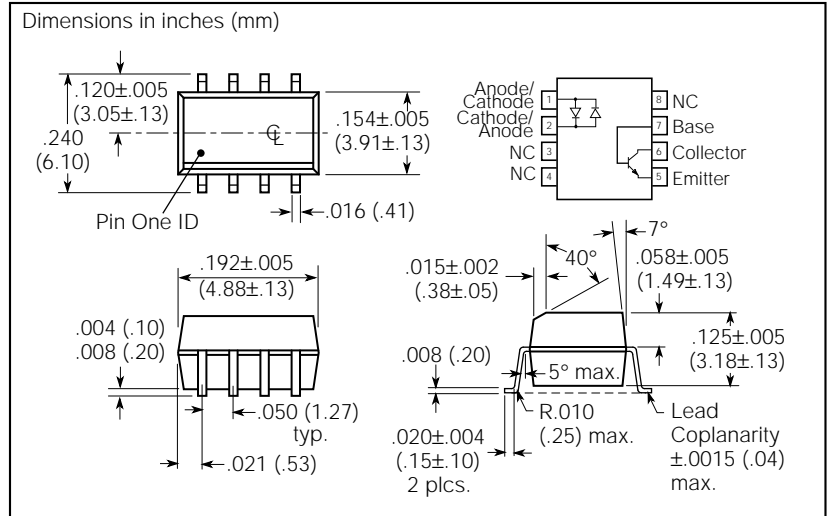

Characteristics (T_A=25°C)

	Symbol	Min.	Typ.	Max.	Unit	Condition
Emitter						
Forward Voltage	V _F		1.2	1.5	V	I _F =±10 mA
Detector						
Breakdown Voltage						
Collector-Emitter	BV _{CEO}	30	50		V	I _C =1 mA
Emitter-Collector	BV _{ECO}	5	10		V	I _E =100 μA
Collector-Base	BV _{CBO}	70	90		V	I _C =100 μA
Leakage Current, Collector-Emitter	I _{CEO}		5	50	nA	V _{CE} =10 V
Package						
DC Current Transfer Ratio	CTR	20			%	I _F =±10 mA, V _{CE} =5 V
Symmetry CTR at +10mA CTR at -10 mA		0.5	1.0	2.0		
Saturation Voltage, Collector-Emitter	V _{CEsat}			0.4		I _F =±16 mA, I _C =2 mA
Isolation Voltage, Input to Output	V _{IO}	2500			VAC _{RMS}	

Figure 1. LED forward current versus forward voltage

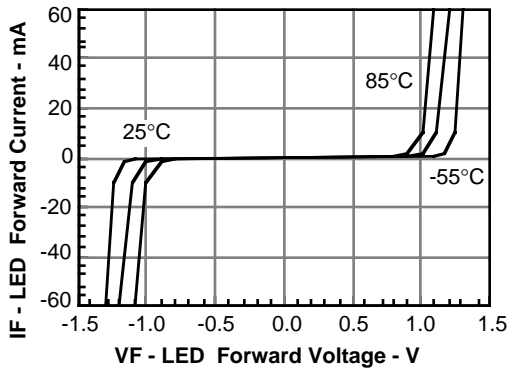


Figure 2. Forward voltage versus forward current

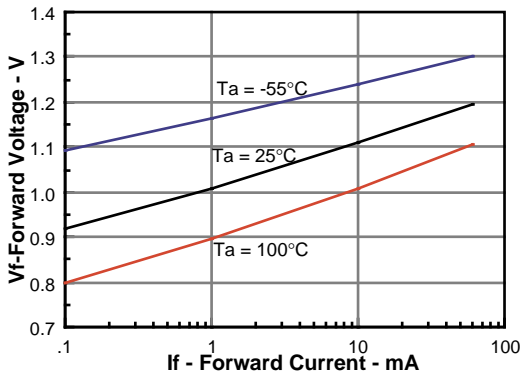


Figure 3. Peak LED current versus duty factor, Tau

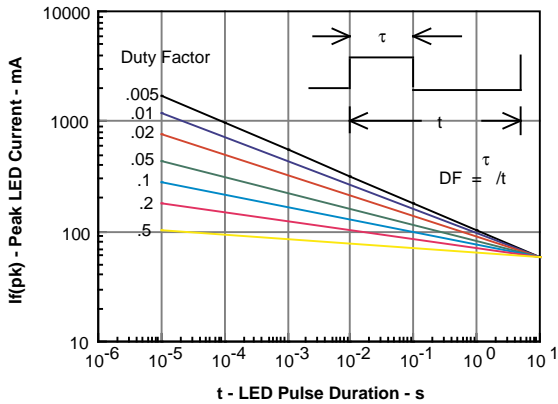


Figure 4. Normalized CTR versus If and Ta

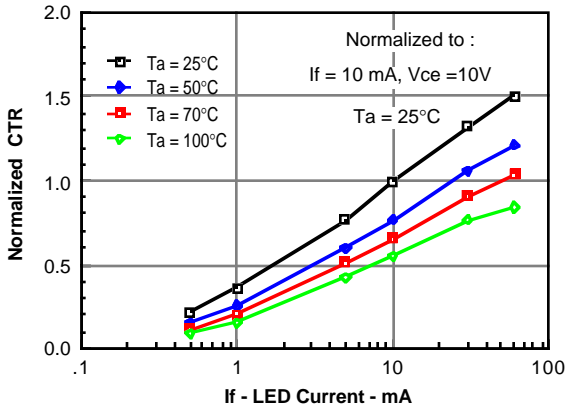


Figure 5. Normalized saturated CTR

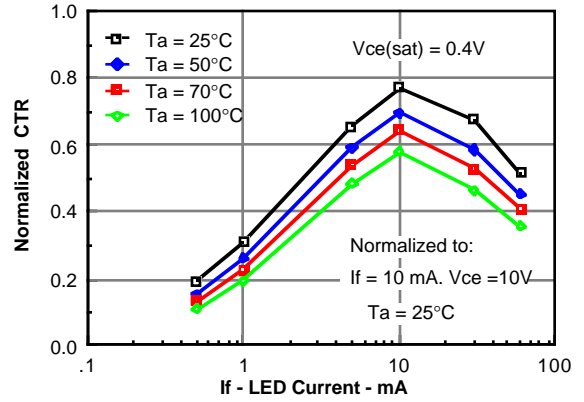


Figure 6. Normalized CTRcb

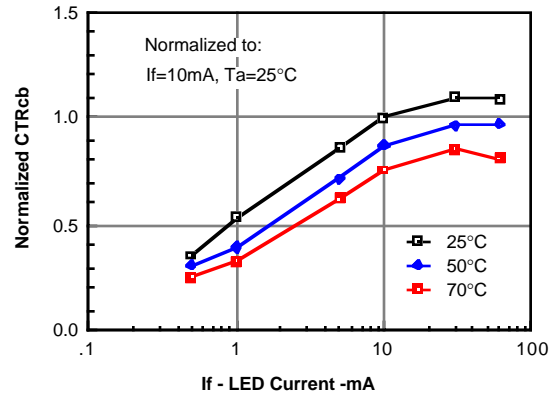


Figure 7. Photocurrent versus LED current

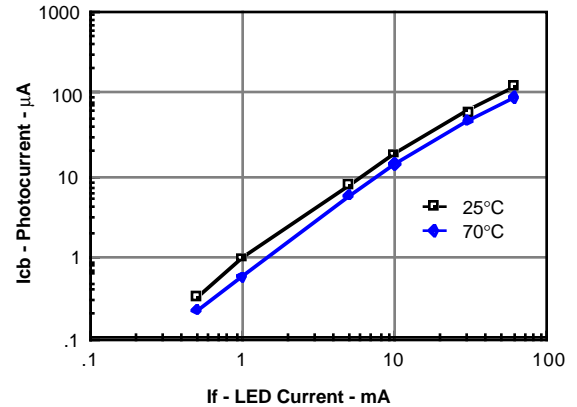


Figure 8. Base current versus If and HFE

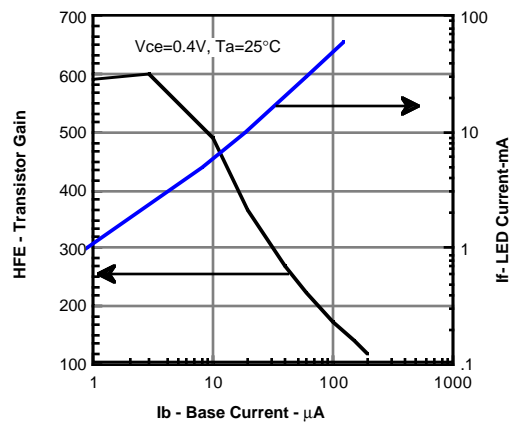


Figure 9. Normalized HFE versus I_b , T_a

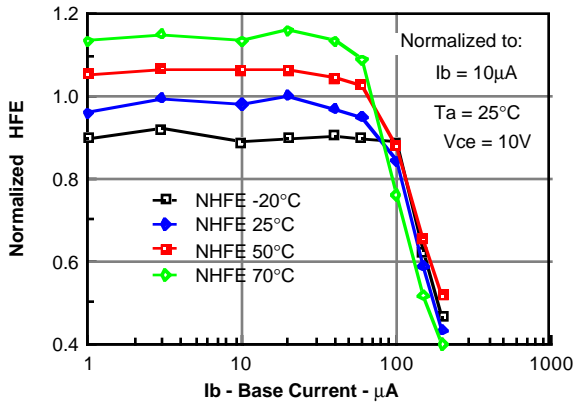


Figure 11. Base emitter voltage versus base current

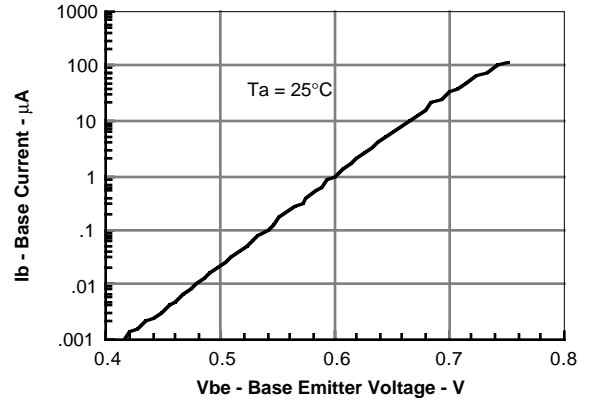


Figure 10. Normalized saturated HFE versus I_b


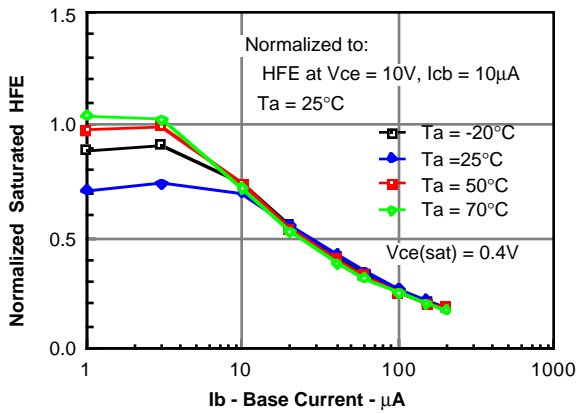


Figure 12. Collector-emitter leakage current versus temperature



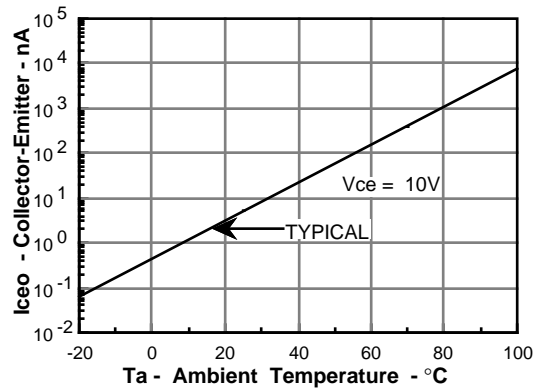

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.