

## PNP SILICON SWITCHING TRANSISTOR

Qualified per MIL-PRF-19500/512

### Devices

2N4029

2N4033

### Qualified Level

JAN  
JANTX  
JANTXV

### MAXIMUM RATINGS


Ratings	Symbol	VALUE		Unit
Collector-Emitter Voltage	$V_{CEO}$	80		Vdc
Collector-Base Voltage	$V_{CBO}$	80		Vdc
Emitter-Base Voltage	$V_{EBO}$	5.0		Vdc
Collector Current	$I_C$	1.0		Adc
		2N4029 <sup>1</sup>	2N4033 <sup>2</sup>	
Total Power Dissipation @ $T_A = +25^{\circ}\text{C}$	$P_T$	0.5	0.8	W
Operating & Storage Junction Temperature Range	$T_J, T_{stg}$	-55 to +200		$^{\circ}\text{C}$

### THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	25.0	$^{\circ}\text{C}/\text{W}$

1) Derate linearly 2.86 mW/ $^{\circ}\text{C}$  for  $T_A > +25^{\circ}\text{C}$

2) Derate linearly 4.56 mW/ $^{\circ}\text{C}$  for  $T_A > +25^{\circ}\text{C}$

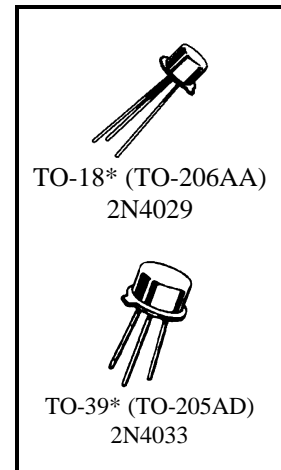

\*See appendix A for package outline

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

### OFF CHARACTERISTICS

Collector-Base Cutoff Current $V_{CB} = 80 \text{ Vdc}$ $V_{CB} = 60 \text{ Vdc}$	$I_{CBO}$		10 10	$\mu\text{Adc}$ $\eta\text{Adc}$
Emitter-Base Cutoff Current $V_{BE} = 5.0 \text{ Vdc}$ $V_{BE} = 3.0 \text{ Vdc}$	$I_{EBO}$		25 10	$\mu\text{Adc}$ $\eta\text{Adc}$
Collector-Emitter Cutoff Voltage $V_{BE} = 40 \text{ Vdc}; V_{CE} = 60 \text{ Vdc}$	$I_{CEX}$		25	$\eta\text{Adc}$

**ELECTRICAL CHARACTERISTICS (con't)**

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

**DC CHARACTERISTICS**<sup>(3)</sup>

Forward-Current Transfer Ratio I <sub>C</sub> = 100 μAdc, V <sub>CE</sub> = 5.0 Vdc I <sub>C</sub> = 100 mAdc, V <sub>CE</sub> = 5.0 Vdc I <sub>C</sub> = 500 mAdc, V <sub>CE</sub> = 5.0 Vdc I <sub>C</sub> = 1.0 Adc, V <sub>CE</sub> = 5.0 Vdc	h <sub>FE</sub>	50 100 70 25	300	
Collector-Emitter Saturation Voltage I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc I <sub>C</sub> = 500 mAdc, I <sub>B</sub> = 50 mAdc I <sub>C</sub> = 1.0 Adc, I <sub>B</sub> = 100 mAdc	V <sub>CE(sat)</sub>		0.15 0.50 1.0	Vdc
Base-Emitter Voltage I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc I <sub>C</sub> = 500 mAdc, I <sub>B</sub> = 50 mAdc	V <sub>BE(sat)</sub>		0.9 1.2	Vdc

**DYNAMIC CHARACTERISTICS**

Magnitude of Common Emitter Small-Signal Short-Circuit Forward-Current Transfer Ratio I <sub>C</sub> = 50 mAdc, V <sub>CE</sub> = 10 Vdc, f = 100 MHz	h <sub>fe</sub>	1.5	6.0	
Output Capacitance V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, 100 kHz ≤ f ≤ 1.0 MHz	C <sub>obo</sub>		20	pF
Input Capacitance V <sub>EB</sub> = 0.5 Vdc, I <sub>C</sub> = 0, 100 kHz ≤ f ≤ 1.0 MHz	C <sub>ibo</sub>		80	pF

**SWITCHING CHARACTERISTICS**

On-Time V <sub>CC</sub> = 31.9 Vdc; I <sub>C</sub> = 500 mAdc; I <sub>B1</sub> = 50 mAdc	t <sub>d</sub>		15	ηs
Rise Time V <sub>CC</sub> = 31.9 Vdc; I <sub>C</sub> = 500 mAdc; I <sub>B1</sub> = 50 mAdc	t <sub>r</sub>		25	ηs

(3) Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.