

DUAL PRE-POWER AMPLIFIER WITH DC VOLUME CONTROL


The KA22134 is a monolithic integrated circuit designed for use in low voltage and low power applications. It has all functions including a dual audio pre-power amplifier, DC volume control and headphone drive circuits.

It is suitable for portable tape recorders or headphone cassette recorders.

FEATURES

- Built-in DC volume control circuit.
- Wide operation supply voltage: $V_{CC} = 1.8 \sim 6V$
- Only a few components to build headphone cassette tape recorders.
- Built-in ripple filter.

16 DIP



ORDERING INFORMATION

Device	Package	Operating Temperature
KA22134	16 DIP	-20°C ~ +75°C

BLOCK DIAGRAM

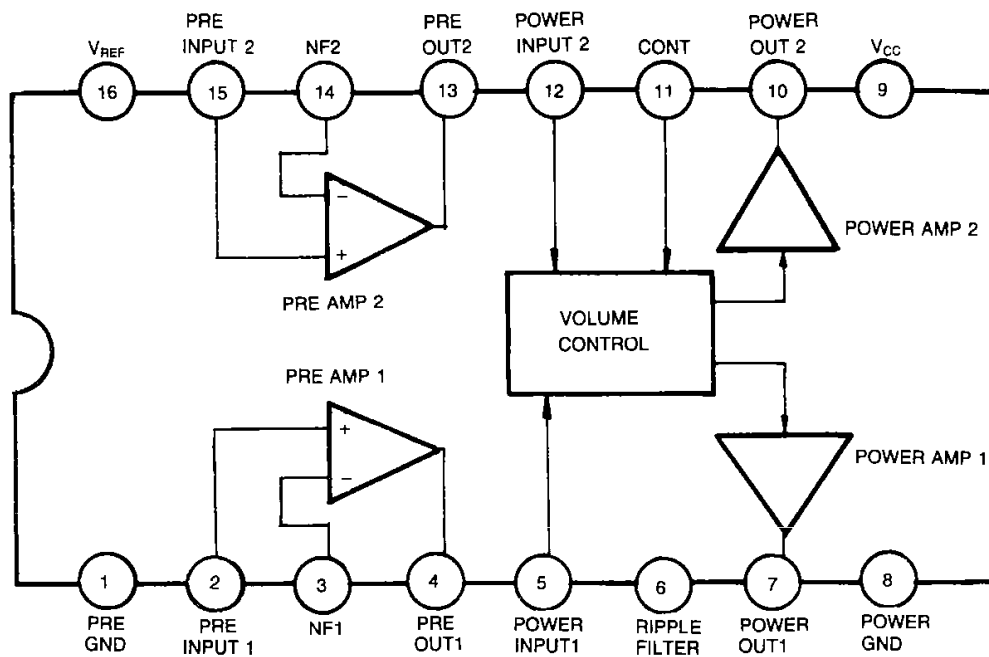


Fig. 1

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	7	V
Power Dissipation	P_D	75	mW
Operating Temperature	T_{OPR}	-20 ~ +75	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 ~ +125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS($V_{CC} = 3\text{V}$, $T_a = 25^\circ\text{C}$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Circuit Current	I_{CCQ1}	$V_I = 0$, $V_{OL} = \text{MIN}$		9	13	mA
	I_{CCQ2}	$V_I = 0$, $V_{OL} = \text{MAX}$		11.0		mA
Cross Talk	CT	$R_G = 2.2\text{K}\Omega$, $V_O = -10\text{dBm}$	34	40		dB

PRE-AMPLIFIER SECTION($V_{CC} = 3\text{V}$, $T_a = 25^\circ\text{C}$, $f = 1\text{KHz}$, $R_{L1} = 10\text{K}\Omega$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Open Loop Voltage Gain	G_{VO}	$V_I = 0.2\text{mV}$	55	62		dB
Closed Loop Voltage Gain	G_{VC1}	$V_O = -10\text{dBm}$, NAB 1KHz		33		dB
Output Voltage	V_O	THD = 1%	600	720		mV
Total Harmonic Distortion	THD ₁	$V_O = -10\text{dBm}$		0.04	0.1	%
Ripple Rejection Ratio	RR ₁	$R_G = 2.2\text{K}\Omega$ $V_R = -20\text{dBm}$, $f_R = 100\text{Hz}$		46		dB
Equivalent Input Noise Voltage	V_{NI}	$R_G = 2.2\text{K}\Omega$, BW = 30 ~ 20KHz Gain for NAB 1KHz		1.2	2.0	μV

POWER AMPLIFIER SECTION($V_{CC} = 3\text{V}$, $T_a = 25^\circ\text{C}$, $f = 1\text{KHz}$, $R_{L2} = 32\Omega$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Power	P_{O1}	THD ₂ = 10%	20	27		mW
	P_{O2}	THD ₂ = 10%, $R_L = 16\Omega$		39		mW
Total Harmonic Distortion	THD ₂	$P_O = 10\text{mW}$, Volume: 100%		0.5	1.2	%
	THD ₃	$P_O = 10\text{mW}$, Volume: 50%		0.3		%
Closed Loop Voltage Gain	G_{VC2}	$V_O = -10\text{dBm}$, Volume: 100%	28	30	32	dB
	G_{VC3}	$V_O = -10\text{dBm}$		15		dB
Channel Balance	CB	$V_O = -10\text{dBm}$	-1.5	0	-1.5	dB
Volume Rejection Ratio	VOL _{REJ}	$V_O = -10\text{dBm}$, Volume: 100% to 0%	66	72		dB
Output Noise Voltage	V_{NO}	BW = 30 ~ 20KHz, $R_G = 600\Omega$		250	320	μV
Ripple Rejection Ratio	RR ₂	$R_G = 600\Omega$, $f_R = 100\text{Hz}$ $V_R = -20\text{dBm}$		46		dB

TEST CIRCUIT

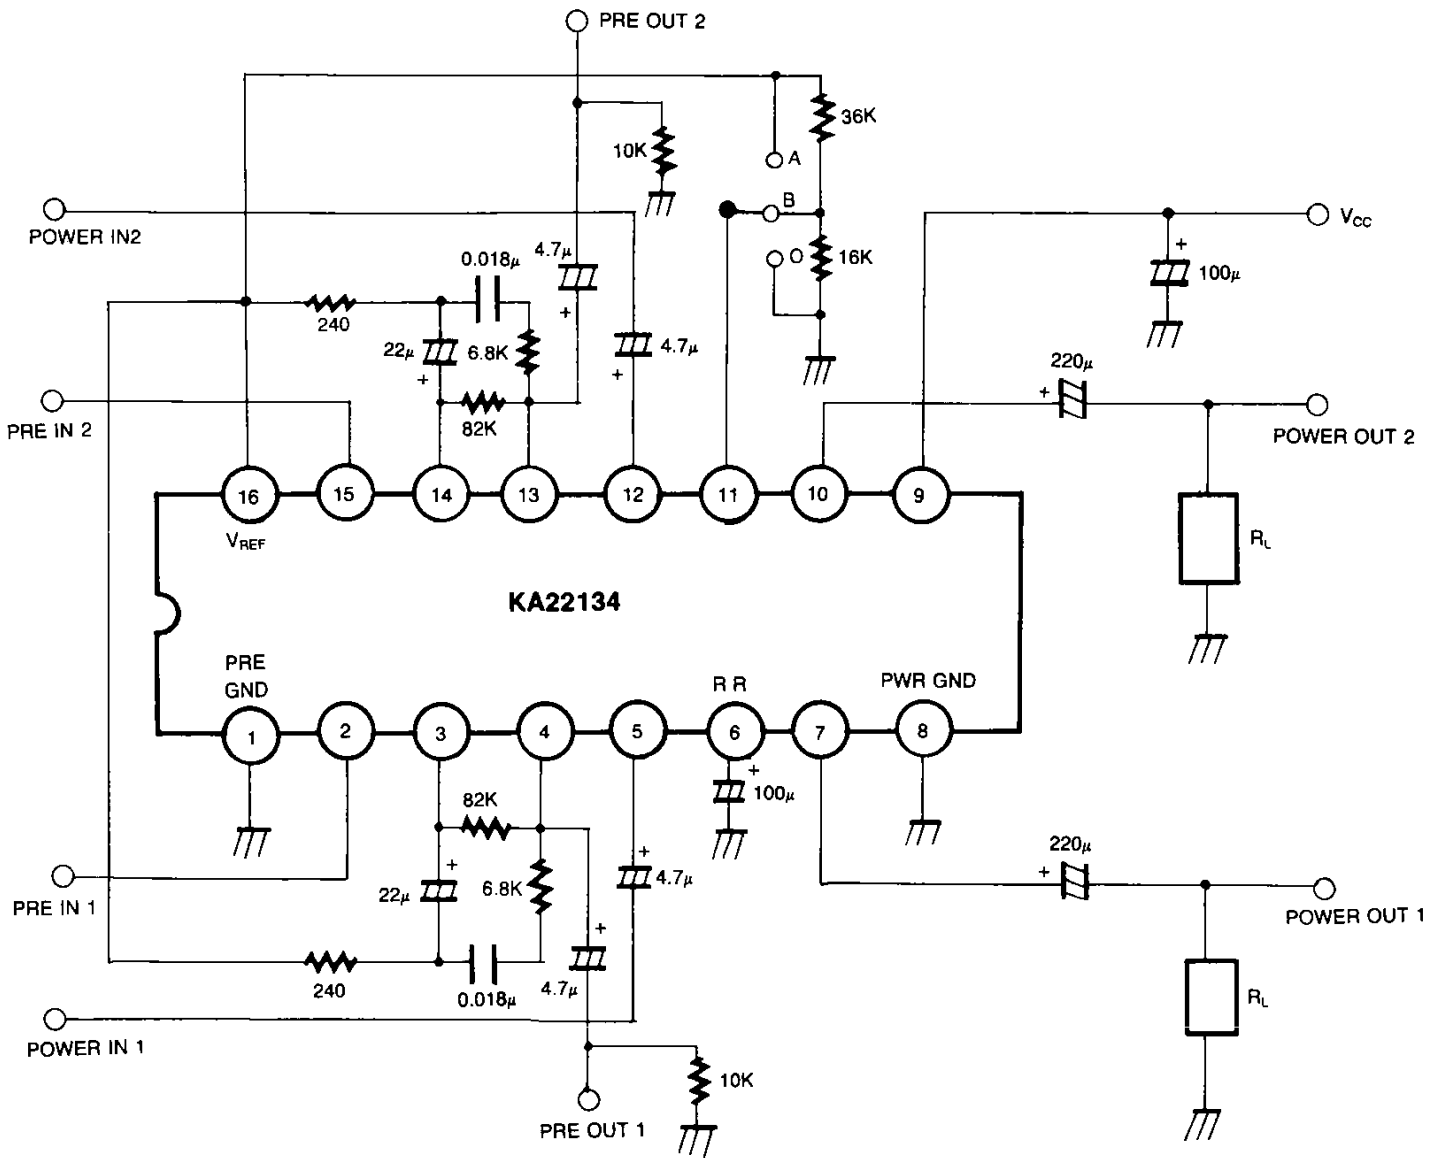


Fig. 2

APPLICATION CIRCUIT

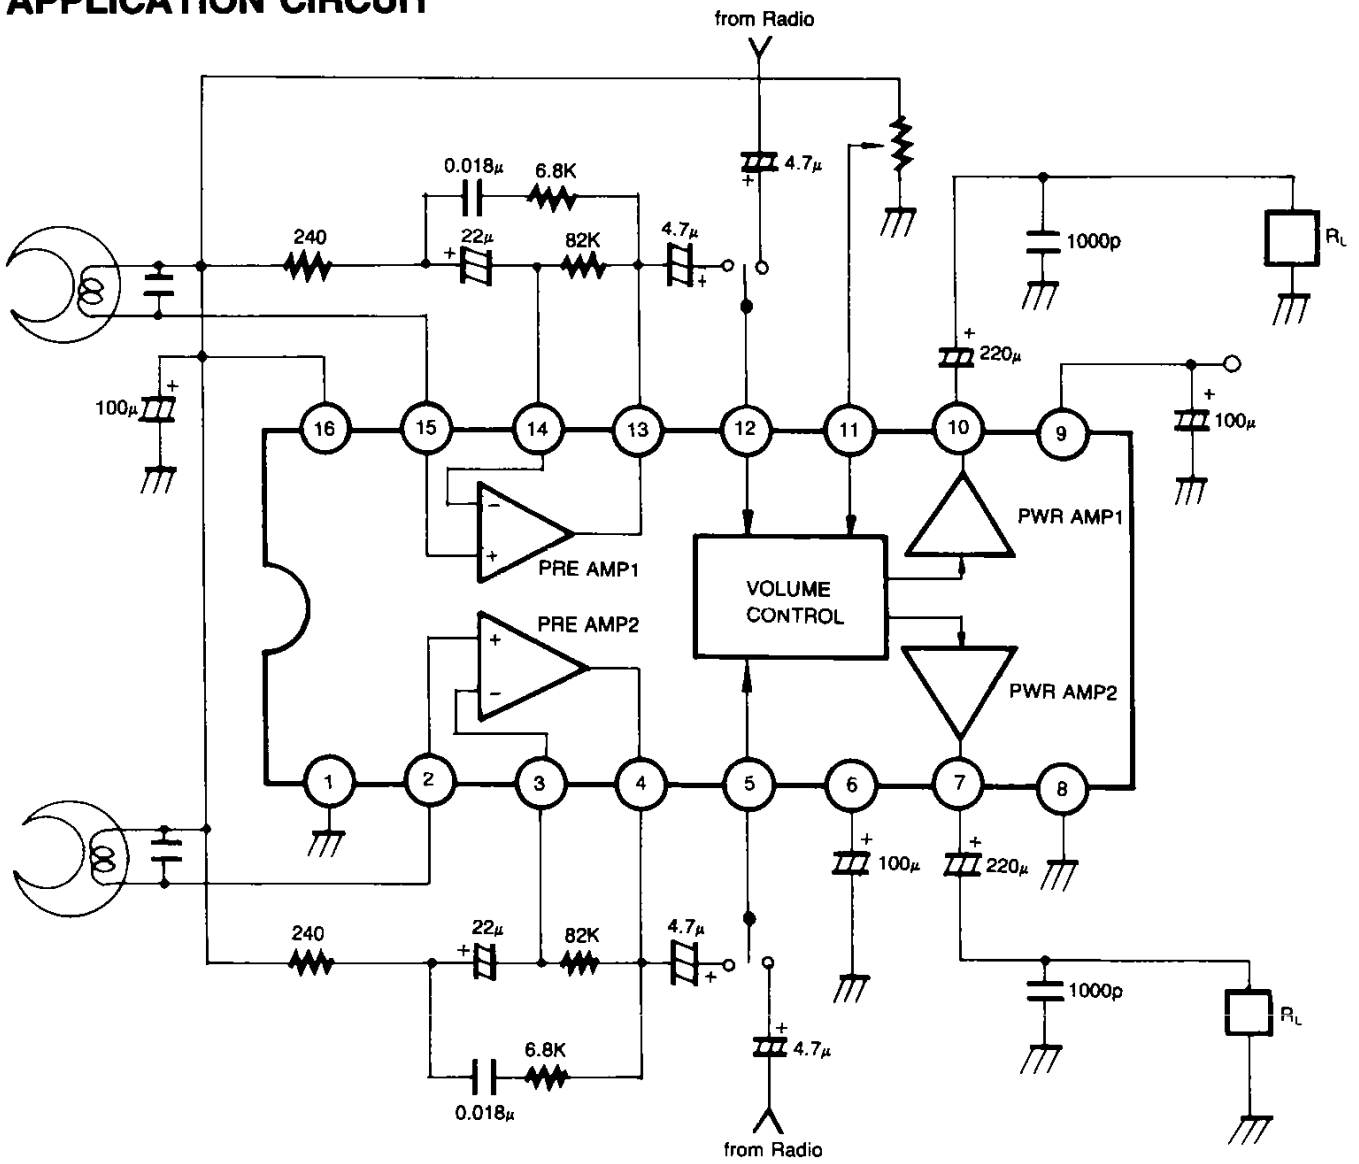


Fig. 3



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.