


DUAL LOW NOISE EQUALIZER AMPLIFIER

The KA22211 is a monolithic integrated circuit consisting of a 2-channel pre-amplifier in a 8-pin plastic single in-line package.

FEATURES

- Recommended operating supply voltage range: $V_{CC} = 5V \sim 14V$
- Low noise ($V_{NI} = 1.0\mu V$: Typ)
- High channel separation
- Minimum number of external parts required

SCHEMATIC DIAGRAM

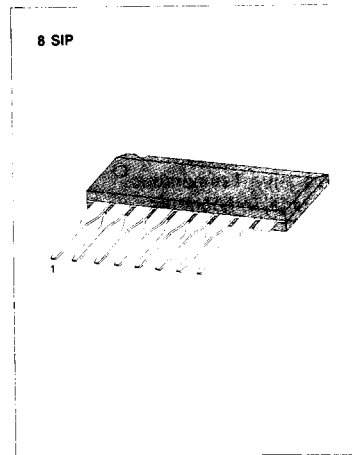

ORDERING INFORMATION

Device	Package	Operating Temperature
KA22211	8 SIP	-20°C ~ +70°C

BLOCK DIAGRAM

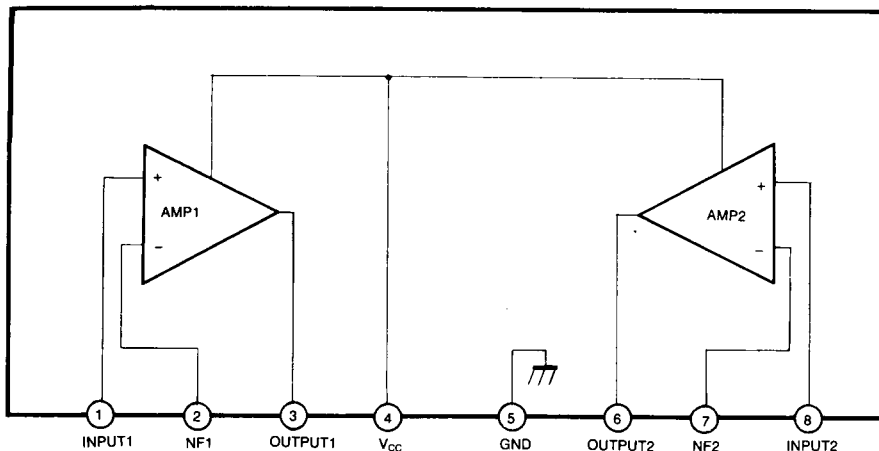


Fig. 1

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Characteristic	Symbol	Value	Unit
Supply Voltage	V _{CC}	18	V
Power Dissipation	P _D	200	mW
Operating Temperature	T _{OPR}	- 20 ~ + 70	°C
Storage Temperature	T _{STG}	- 40 ~ + 125	°C

ELECTRICAL CHARACTERISTICS

(Ta = 25°C, V_{CC} = 9V, R_L = 10KΩ, R_G = 600Ω, f = 1KHz, NAB, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Circuit Current	I _{CCQ}	V _I = 0		4.0	6.0	mA
Open Loop Voltage Gain	G _{VO}		65	80		dB
Closed Loop Voltage Gain	G _{VC}	V _o = 0.5V	33	35	37	dB
Output Voltage	V _o	THD = 1%	1.1	1.3		V
Total Harmonic Distortion	THD	V _o = 0.5V		0.1	0.3	%
Input Resistance	R _I		70	100		KΩ
Equivalent Input Noise Voltage	V _{NI}	R _G = 2.2KΩ BW (- 3dB) = 15Hz ~ 30KHz		1.0	2.0	μV
Cross Talk	CT	R _G = 2.2KΩ	50	65		dB

TEST CIRCUIT

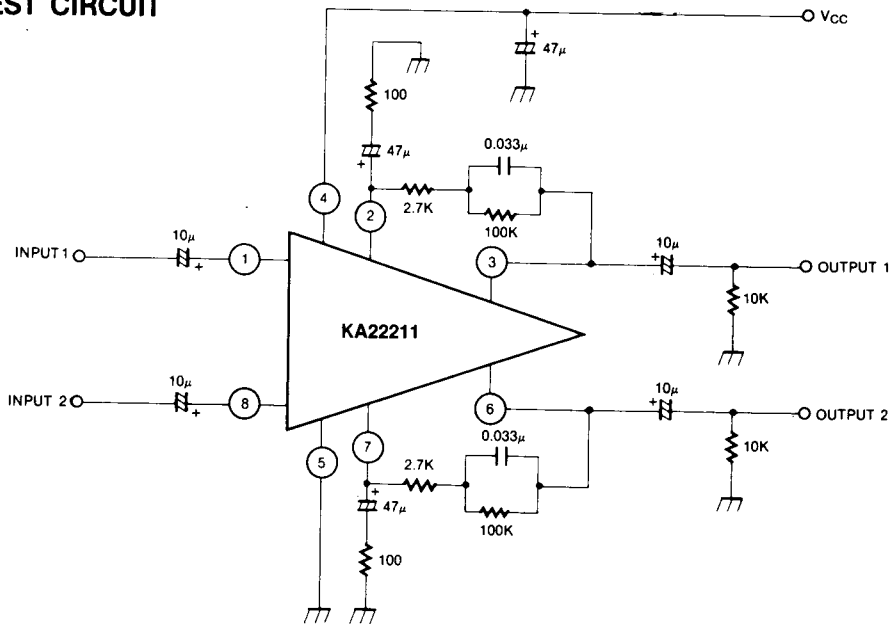


Fig. 2

APPLICATION INFORMATION

External Components

C₂ (C₉): Input coupling capacitor
 These components are concerned with the output noise and operation starting time, and its capacitance is adequate for 10μF.
 As C₂ (C₉) below 4.7μF extends the operation starting time, a capacitance of over 4.7μF is recommended.

C₃ (C₈): Negative feedback capacitor
 These components decide the low cut-off frequency, which is determined as follows:

$$C_3 (C_8) = \frac{1}{2\pi f_L \cdot R_2 (R_7)} \quad \text{where, } f_L: \text{ low cut-off frequency.}$$

A large C₃ (C₈) makes the operation starting time of an amplifier late. It's capacitance is adequate for 47μF.

C₄, R₃, R₂ (C₇, R₄, R₅): Equalizer network
 This components decide the frequency response of an equalizer amplifier. The time constant of standard NAB characteristic is as follows:

Tape Speed	9.5cm/sec	4.75cm/sec
Time Constant		
C ₄ (R ₂ + R ₃)	3,180μsec	1,590μsec
C ₄ , R ₂	90μsec	120μsec

C₁₁ Filter capacitor of the power line
 This should be located as close to the supply voltage pin (Pin 4) as possible. The recommended value is 47μF:

C₁ (C₁₀): Protection capacitor
 These components protect against wave damage is strong electric fields and engine noise damage and block oscillation at high amplifying operation.

C₅ (C₆): Output coupling capacitor
 The recommended value is 10μF.

APPLICATION CIRCUIT

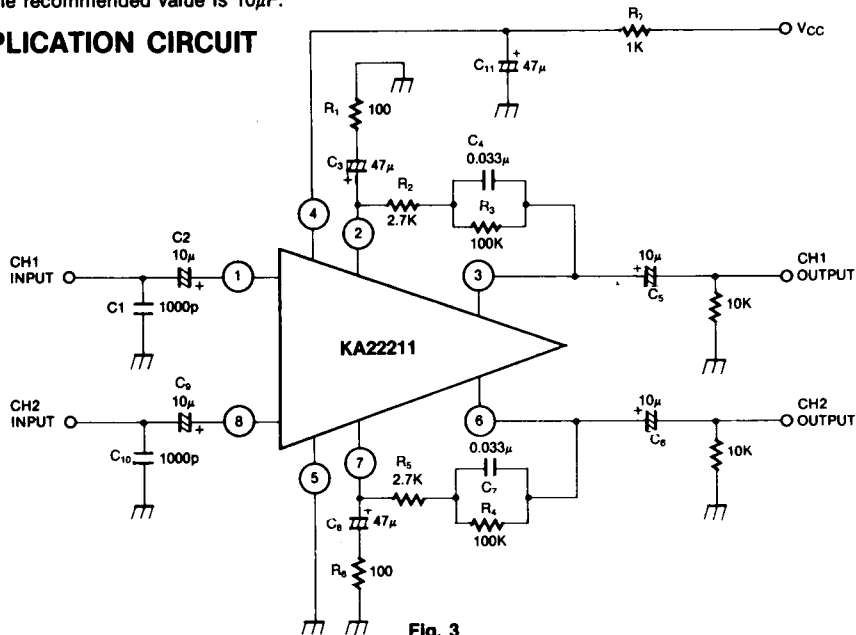


Fig. 3



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.