

**INTRODUCTION**

The KA22429D is a monolithic integrated circuit designed for Portable FM radios. It consists of an RF input stage, mixer, IF, mute control and loop (earphone drive) Amp. It is suitable for a pocket-size radio.

**FUNCTIONS**


- RF input stage
- Mixer
- Mute control
- Local OSC
- IF Amp
- Earphone drive amp

**FEATURES**

- Minimum number of external parts required
- Single trimmer tuning
- No FM det coil
- FLL IF detect system (76kHz)
- Operating voltage:  $V_{CC} = 1.8V \sim 6.0V$

**ORDERING INFORMATION**

Device	Package	Operating Temperature
KA22429D	16-SOP-225	-10°C ~ + 70°C

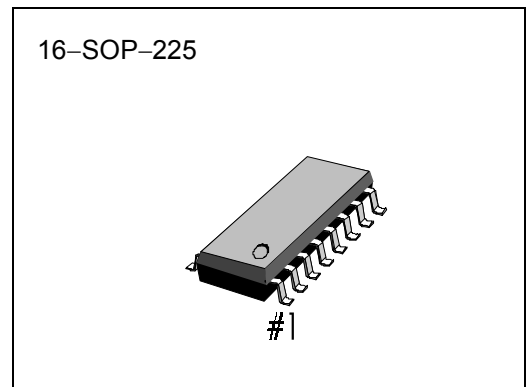

## BLOCK DIAGRAM

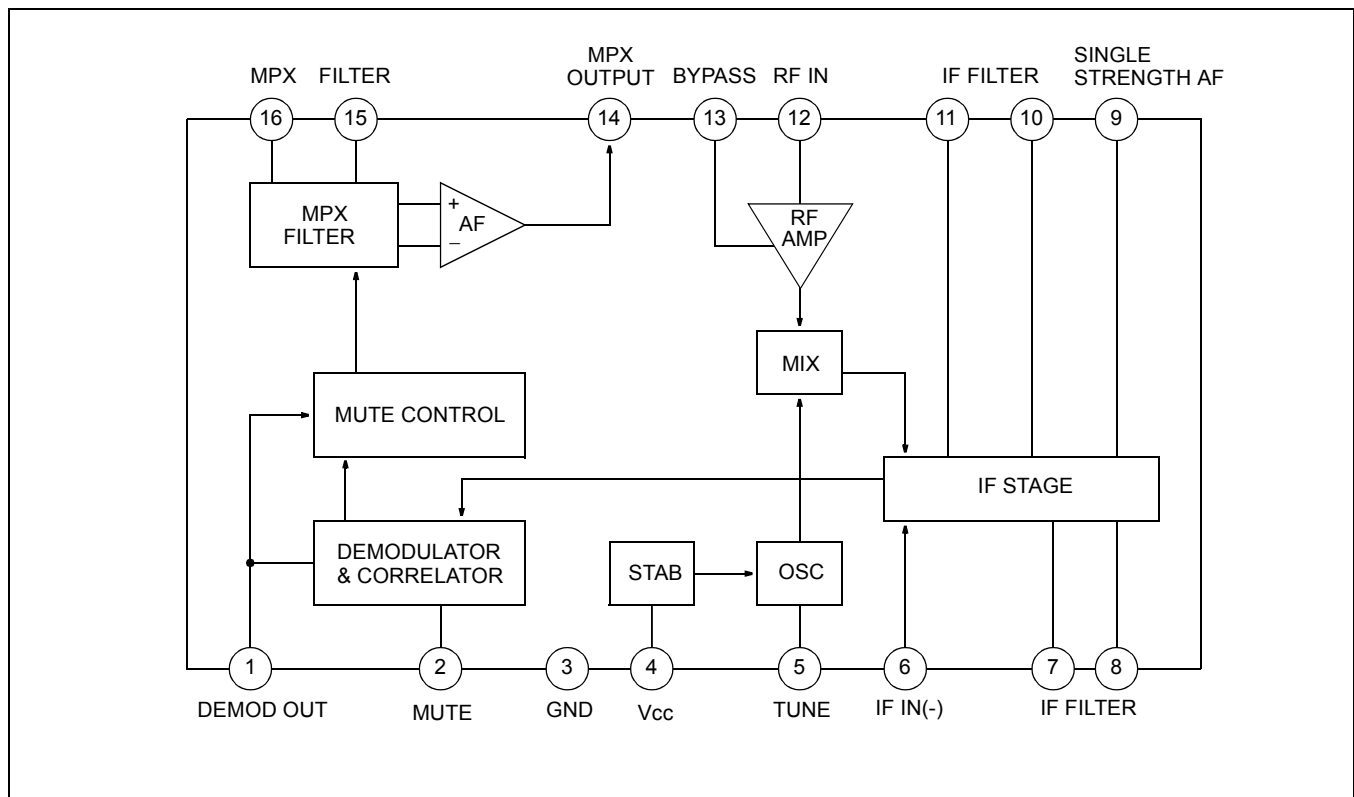


Figure 1.

## ABSOLUTE MAXIMUM RATINGS ( Ta = 25°C )

Characteristic	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	7	V
Oscillator Voltage	V <sub>OSC</sub>	-0.5 ~ + 0.5	V
Operating Temperature	T <sub>OPR</sub>	-10 ~ + 70	°C
Storage Temperature	T <sub>STG</sub>	-55 ~ + 150	°C
Thermal Resistance Junction to Ambient	R <sub>EJA</sub>	300	K/W

**ELECTRICAL CHARACTERISTICS**

MONO CONDITION:  $f = 98\text{MHz}$ ,  $f_m = 1\text{kHz}$ ,  $\Delta f = \pm 22.5\text{kHz}$ ,  $V = 50\text{dB}\mu$ ,  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 3\text{V}$

STEREO CONDITION:  $f = 98\text{MHz}$ ,  $f_m = 1\text{kHz}$ ,  $\Delta f = \pm 22.5\text{kHz}$ ,  $V = 60\text{dB}\mu$  (Modulated with pilot  $\Delta f = 6.75\text{kHz}$ )

Characteristic		Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Quiescent Circuit Current		$I_{CCQ}$	$V_I = 0$	–	6.3	–	mA
MONO	Sensitivity	$S_{VI1}$	–3dB: Mute Disable	–	12	–	$\text{dB}\mu$
		$S_{VI2}$	SIN = 26dB: Mute Enable	–	17	–	$\text{dB}\mu$
	Signal to Noise Ratio	S/N1	–	–	60	–	dB
	Total Harmonic Distortion	THD1	$\Delta f = \pm 22.5\text{kHz}$	–	0.7	–	%
		THD2	$\Delta f = \pm 75\text{kHz}$	–	2.3	–	%
	AM Rejection Ratio	AMR	AM: $f_m = 1\text{kHz}$ , $m = 80\%$ FM: $f_m = 1\text{kHz}$ , $\Delta f = 75\text{kHz}$	–	50	–	dB
	Oscillator Voltage	$V_{OSC}$	–	–	250	–	mV
	AFC Range	$\Delta\text{AFC}$	–	–	160	–	kHz
	Mute Range	MR	–	–	120	–	kHz
Band Width	BW	$\Delta\text{VO} = 3\text{dB}$ Pre-Emphasis $t = 5\text{kHz}$	–	10	–	kHz	
AM Output Voltage	$V_{O1}$	–	–	90	–	mV	
STEREO	Sensitivity	$S_{VI3}$	S/N = 46dB	–	49	–	$\text{dB}\mu$
	Signal to Noise Ratio	S/N <sub>2</sub>	–	–	53	–	dB
	Channel Separation	CS	–	–	20	–	dB
	AF Output Voltage	$V_{O2}$	–	–	80	–	mV

TEST CIRCUIT

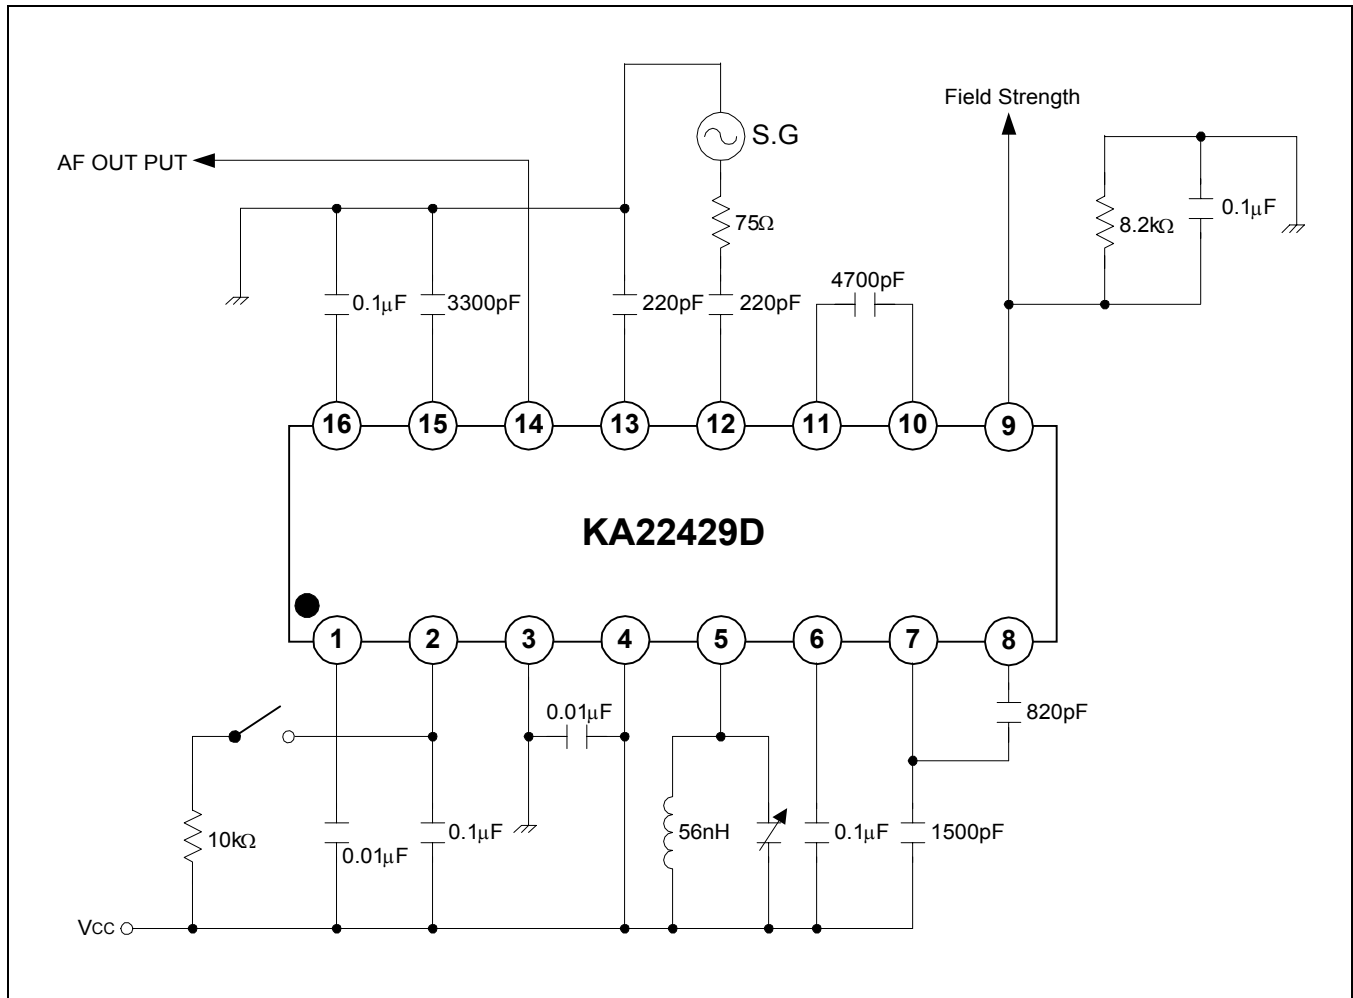


Figure 2. Test Circuit for Mono Operation

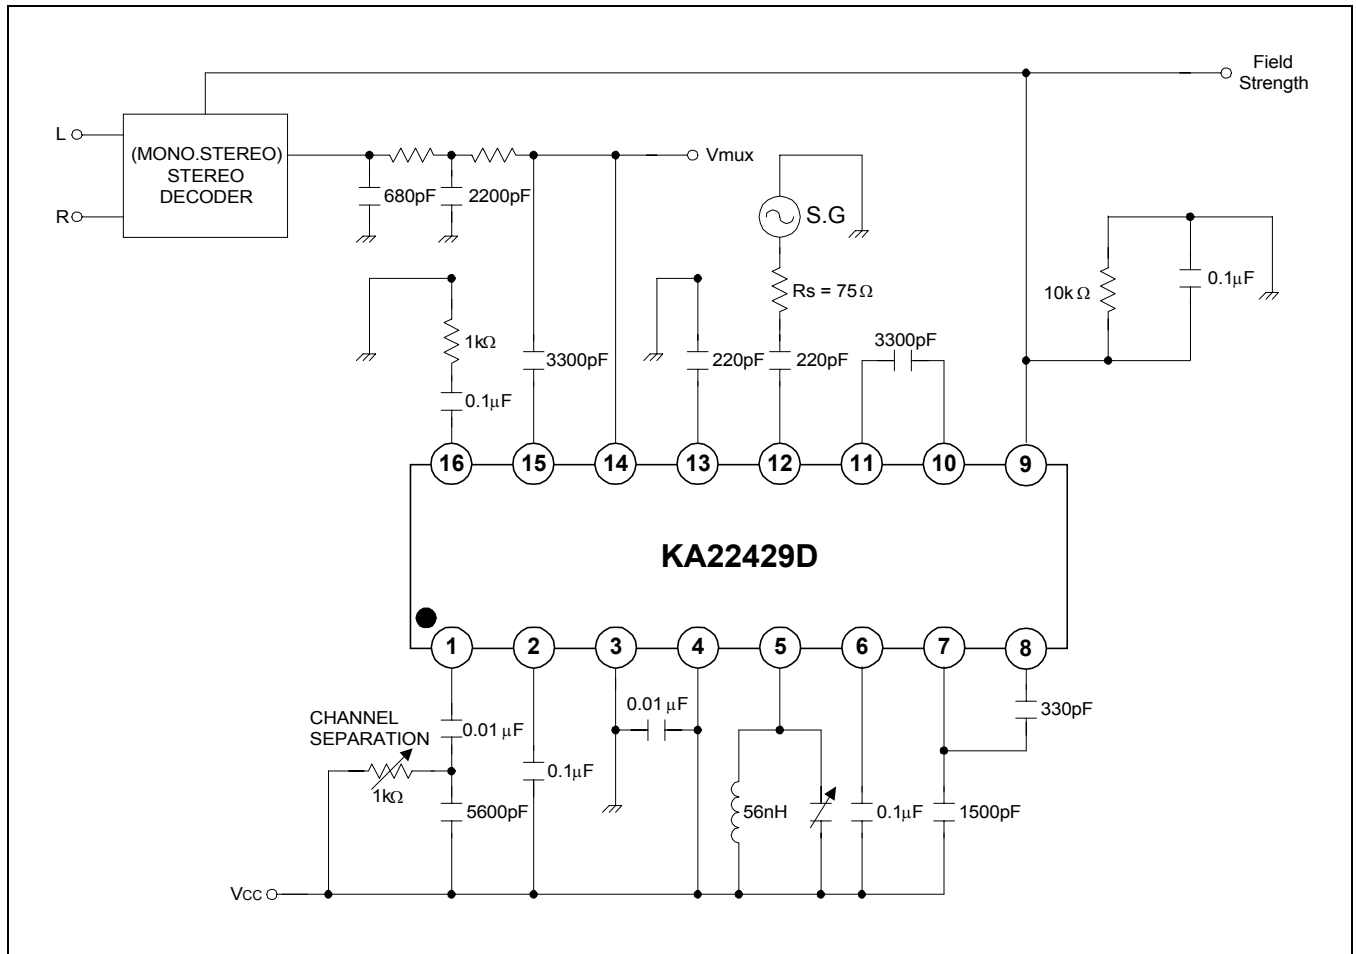


Figure 3. Test Circuit for Stereo Operation

APPLICATION CIRCUIT

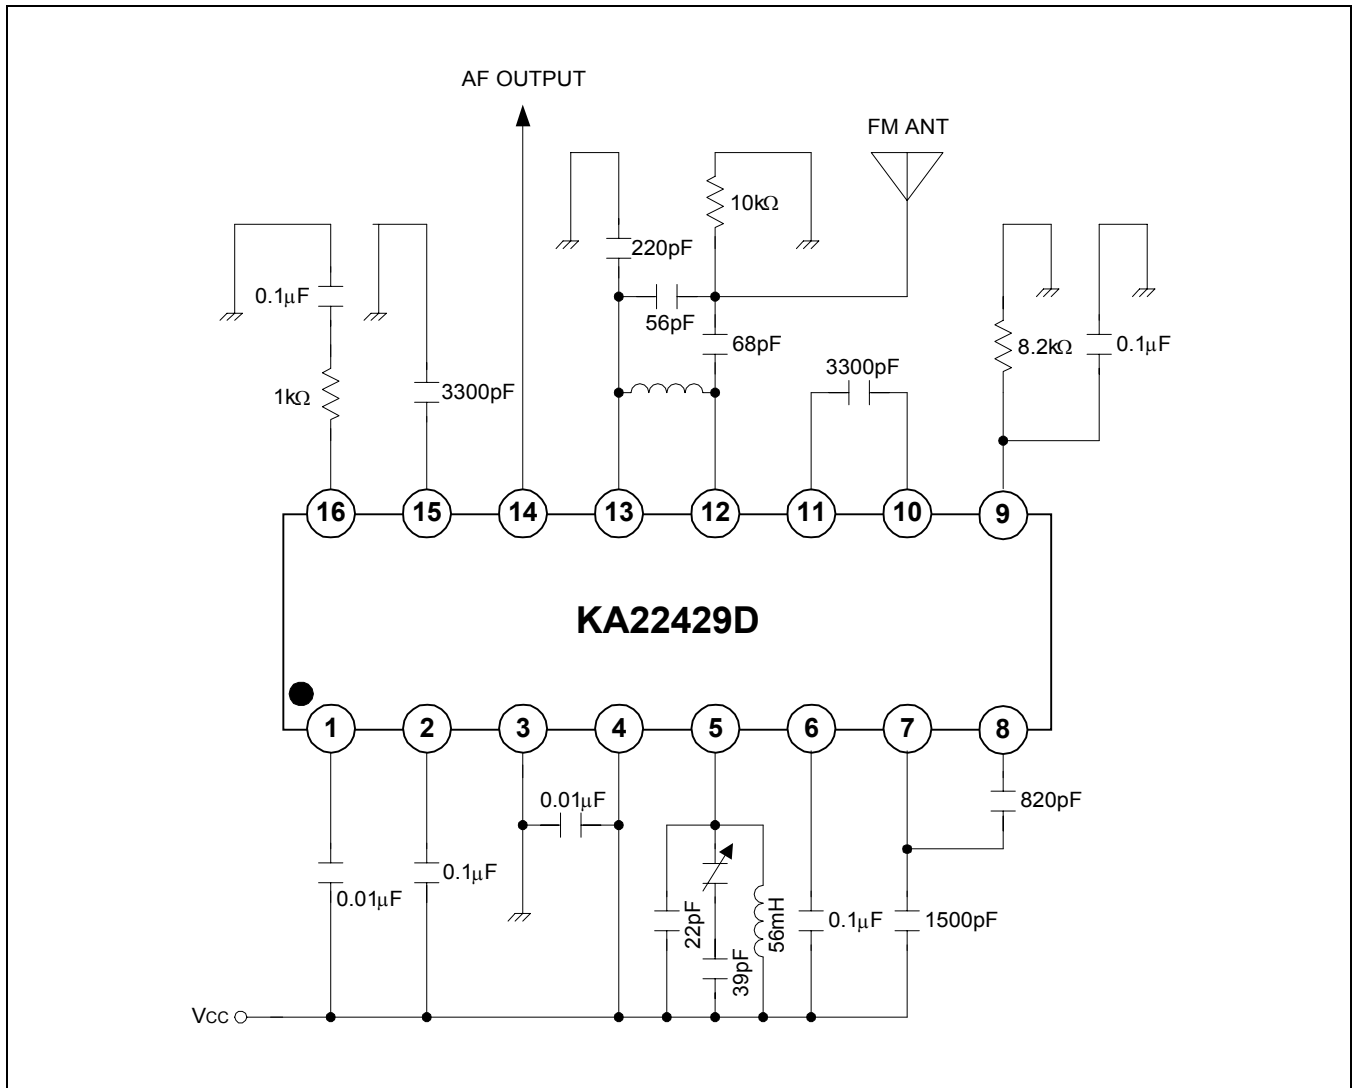


Figure 4.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.