


**Features**

- RF Wideband Amplifier/Oscillator
- 5GHz Transition Frequency
- Low Intermodulation Distortion
- High Power Gain
- Low Noise

**Mechanical Data**

- Case: SOT-23, Molded Plastic
- Leads/Terminals: Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Marking: +P2
- Weight: 0.008 grams (approx.)

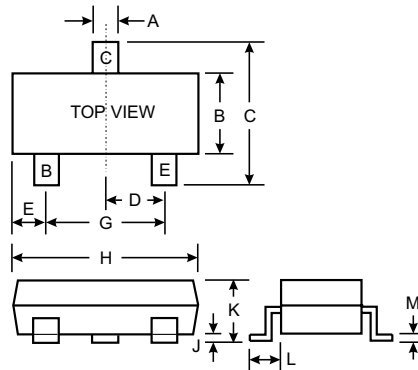

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.19	1.40
C	2.10	2.50
D	0.89	1.05
E	0.45	0.61
G	1.78	2.05
H	2.65	3.05
J	0.013	0.15
K	0.89	1.10
L	0.45	0.61
M	0.076	0.178
All Dimensions in mm		

**Maximum Ratings** @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	BFR92A	Unit
Collector-Base Voltage	V <sub>CBO</sub>	20	V
Collector-Emitter Voltage	V <sub>CEO</sub>	15	V
Emitter-Base Voltage	V <sub>EBO</sub>	2.0	V
Collector Current - Continuous (Note 1)	I <sub>c</sub>	30	mA
Power Dissipation (Note 1) @ T <sub>A</sub> = 60°C	P <sub>d</sub>	200	mW
Thermal Resistance, Junction to Ambient (Note 1)	R <sub>θJA</sub>	450	K/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to +150	°C

Notes: 1. Device mounted on ceramic substrate 0.7mm x 2.5 cm<sup>2</sup> area.

**Electrical DC Characteristics** @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
DC Current Gain	$h_{FE}$	65	—	150	—	$V_{CE} = 10\text{V}$ , $I_C = 14\text{mA}$
Collector - Emitter Cutoff Current	$I_{CES}$	—	—	100	$\mu\text{A}$	$V_{BE} = 0\text{V}$ , $V_{CE} = 20\text{V}$
Collector - Base Cutoff Current	$I_{CBO}$	—	—	50	nA	$I_E = 0\text{V}$ , $V_{CB} = 10\text{V}$
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	20	—	—	V	$I_C = 10\mu\text{A}$ , $I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	15	—	—	V	$I_C = 1.0\text{mA}$ , $I_B = 0$
Emitter- Base Breakdown Voltage	$V_{(BR)EBO}$	2.0	—	—	V	$I_E = 10\mu\text{A}$ , $I_C = 0$

**Electrical AC Characteristics** @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Transition Frequency	$f_T$	5.0	—	—	GHz	$V_{CE} = 10\text{V}$ , $I_C = 14\text{mA}$ , $f = 500\text{MHz}$
Collector - Base Capacitance	$C_{cbo}$	—	0.3	—	pF	$V_{CB} = 10\text{V}$ , $f = 1.0\text{MHz}$
Collector - Emitter Capacitance	$C_{ceo}$	—	0.15	—	pF	$V_{CE} = 10\text{V}$ , $f = 1.0\text{MHz}$
Emitter - Base Capacitance	$C_{ebo}$	—	0.65	—	pF	$V_{EB} = 0.5\text{V}$ , $f = 1.0\text{MHz}$
Noise Figure	NF	—	1.8	—	dB	$V_{CE} = 10\text{V}$ , $I_C = 2.0\text{mA}$ , $Z_S = 50\Omega$ , $f = 800\text{MHz}$
Power Gain	$G_{pe}$	—	16	—	dB	$V_{CE} = 10\text{V}$ , $I_C = 14\text{mA}$ , $Z_S = 50\Omega$ , $Z_L = Z_{lopt}$ , $f = 800\text{MHz}$
Linear Fall Time	$V_1 = V_2$	—	120	—	mV	$V_{CE} = 10\text{V}$ , $I_C = 14\text{mA}$ , $d_{IM} = 60\text{dB}$ , $Z_S = Z_L = 50\Omega$ , $f_1 = 806\text{MHz}$ , $f_2 = 810\text{MHz}$
Third Order Intercept Point	$IP_3$	—	24	—	dBm	$V_{CE} = 10\text{V}$ , $I_C = 14\text{mA}$ , $f = 800\text{MHz}$


Notes: 1. Device mounted on ceramic substrate 0.7mm x 2.5 cm<sup>2</sup> area.

**Common Emitter S - Parameters** @  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\Omega$  unless otherwise specified


$V_{CE}/V$	$I_C/mA$	f/MHz	$S_{11}$		$S_{21}$		$S_{12}$		$S_{22}$		
			LINEAR MAG	ANGULAR MAG	LINEAR MAG	ANGULAR MAG	LINEAR MAG	ANGULAR MAG	LINEAR MAG	ANGULAR MAG	
			—	DEGREE	—	DEGREE	—	DEGREE	—	DEGREE	
5.0	2.0	100	0.902	-17.5	6.38	164.6	0.025	79.9	0.978	-7.6	
		300	0.761	-50.2	5.51	137.8	0.064	63.1	0.859	-19.3	
		500	0.577	-76.8	4.48	117.8	0.086	53.7	0.736	-24.2	
		800	0.399	-105.3	3.28	98.9	0.104	49.7	0.642	-25.3	
		1000	0.339	-121.9	2.79	90.0	0.114	50.3	0.618	-26.0	
		1200	0.303	-138.1	2.45	82.1	0.124	51.1	0.603	-28.0	
		1500	0.284	-163.3	2.07	71.4	0.140	53.1	0.577	-31.2	
		2000	0.272	172.9	1.79	62.5	0.157	55.5	0.560	-33.9	
	2000	0.278	159.4	1.65	57.3	0.171	56.6	0.558	-36.0		
	5.0	10	100	0.783	-27.2	12.84	155.8	0.023	76.3	0.934	-12.7
			300	0.534	-69.6	9.12	122.8	0.052	61.9	0.711	-25.1
			500	0.351	-97.6	6.41	104.8	0.068	59.5	0.580	-25.6
			800	0.220	-128.3	4.28	89.8	0.091	61.1	0.518	-22.1
			1000	0.188	-145.2	3.53	82.9	0.107	62.5	0.515	-22.2
			1200	0.175	-162.0	3.04	76.5	0.124	62.8	0.510	-24.1
			1500	0.189	175.1	2.51	67.8	0.149	63.0	0.494	-27.3
			2000	0.200	153.5	2.16	60.2	0.175	62.4	0.483	-30.0
	2000	0.214	140.6	1.98	55.8	0.194	61.6	0.481	-32.6		
	10	14	100	0.641	-38.1	19.40	146.3	0.020	73.2	0.869	-17.6
			300	0.362	-85.8	11.09	112.0	0.043	65.2	0.597	-26.0
			500	0.229	-116.7	7.27	97.3	0.062	66.3	0.496	-22.9
			800	0.148	-151.6	4.69	84.9	0.089	68.1	0.465	-18.1
			1000	0.136	-168.5	3.83	79.0	0.108	68.1	0.473	-18.4
			1200	0.133	176.8	3.27	73.4	0.127	67.8	0.473	-20.6
			1500	0.160	158.3	2.70	65.7	0.156	66.5	0.461	-24.6
			2000	0.183	139.4	2.30	58.9	0.184	64.8	0.452	-27.4
	2000	0.198	130.4	2.12	54.8	0.203	63.5	0.450	-30.1		
	14	20	100	0.566	-44.3	22.20	141.5	0.019	72.7	0.832	-19.4
			300	0.301	-94.2	11.58	108.1	0.041	67.5	0.560	-25.1
			500	0.195	-127.0	7.43	94.6	0.060	69.0	0.475	-20.9
			800	0.137	-164.6	4.78	83.2	0.089	70.1	0.456	-16.5
			1000	0.129	-179.9	3.88	77.6	0.109	69.9	0.466	-17.1
			1200	0.132	167.7	3.30	72.3	0.128	69.1	0.469	-19.4
			1500	0.162	153.1	2.72	64.9	0.157	67.5	0.456	-23.4
			2000	0.183	136.6	2.32	58.1	0.185	65.6	0.448	-26.3
	2000	0.204	127.4	2.13	54.1	0.205	64.1	0.446	-29.2		
	20	20	100	0.484	-52.5	24.55	136.0	0.018	72.0	0.788	-20.7
			300	0.251	-106.2	11.67	104.3	0.039	69.5	0.531	-22.8
			500	0.181	-141.8	7.37	92.1	0.058	71.5	0.466	-18.3
			800	0.144	-177.4	4.70	81.3	0.088	72.0	0.456	-14.4
			1000	0.138	169.3	3.82	76.0	0.108	71.4	0.469	-15.3
			1200	0.145	159.1	3.26	70.9	0.127	70.6	0.472	-18.1
			1500	0.179	148.3	2.67	63.7	0.157	68.4	0.461	-22.4
			2000	0.202	133.7	2.28	57.0	0.185	66.4	0.453	-25.4
	2000	0.220	125.9	2.10	52.8	0.205	64.8	0.452	-28.4		

**Common Emitter S - Parameters** @  $T_A = 25^\circ\text{C}$ ,  $Z_O = 50\Omega$  unless otherwise specified


$V_{CE}/V$	$I_C/mA$	f/MHz	$S_{11}$		$S_{21}$		$S_{12}$		$S_{22}$	
			LINEAR MAG	ANGULAR MAG	LINEAR MAG	ANGULAR MAG	LINEAR MAG	ANGULAR MAG	LINEAR MAG	ANGULAR MAG
			—	DEGREE	—	DEGREE	—	DEGREE	—	DEGREE
10	2.0	100	0.915	-16.2	6.32	165.5	0.020	80.5	0.981	-6.2
		300	0.780	-46.7	5.56	139.6	0.054	65.1	0.883	-16.1
		500	0.597	-71.2	4.57	119.9	0.073	55.8	0.778	-20.4
		800	0.405	-97.6	3.37	101.0	0.089	52.2	0.692	-21.6
		1000	0.339	-113.1	2.87	92.3	0.098	53.0	0.677	-22.4
		1200	0.294	-129.6	2.53	84.2	0.107	54.3	0.663	-24.0
		1500	0.261	-155.8	2.13	73.7	0.121	56.8	0.643	-27.0
		2000	0.240	179.2	1.84	64.8	0.136	59.2	0.630	-29.6
	2000	0.243	163.2	1.70	59.8	0.149	61.1	0.630	-31.4	
	5.0	100	0.816	-24.3	12.50	157.7	0.019	77.2	0.947	-10.3
		300	0.569	-62.7	9.15	125.3	0.044	63.6	0.761	-20.5
		500	0.372	-87.9	6.55	106.9	0.059	60.6	0.647	-21.1
		800	0.220	-114.2	4.41	91.6	0.079	62.3	0.592	-18.8
		1000	0.175	-129.6	3.63	84.6	0.093	63.9	0.590	-19.1
		1200	0.153	-145.8	3.13	78.3	0.107	64.8	0.589	-20.8
		1500	0.153	-175.7	2.59	69.7	0.129	65.5	0.576	-24.1
		2000	0.157	158.0	2.22	62.1	0.152	65.5	0.567	-26.6
	2000	0.170	143.4	2.04	57.9	0.168	65.3	0.567	-28.7	
	10	100	0.696	-33.7	18.83	148.4	0.017	74.6	0.896	-13.8
		300	0.397	-75.7	11.20	114.4	0.038	66.4	0.666	-20.8
		500	0.237	-101.2	7.41	99.0	0.054	67.0	0.577	-18.6
		800	0.132	-130.2	4.81	86.4	0.078	68.9	0.553	-15.5
		1000	0.103	-149.3	3.92	80.4	0.094	69.4	0.560	-16.0
		1200	0.097	-165.8	3.35	75.0	0.111	69.5	0.561	-18.2
		1500	0.116	167.2	2.76	67.5	0.136	69.0	0.551	-21.9
		2000	0.133	141.3	2.36	60.4	0.160	67.9	0.545	-24.4
	2000	0.148	129.4	2.16	56.4	0.178	66.8	0.549	-27.1	
	14	100	0.639	-38.8	21.41	143.8	0.016	73.2	0.866	-15.2
		300	0.339	-82.4	11.61	110.2	0.036	67.5	0.636	-19.8
		500	0.199	-110.0	7.52	96.3	0.053	69.4	0.562	-16.9
		800	0.113	-144.1	4.83	84.4	0.077	70.7	0.549	-14.2
		1000	0.093	160.9	3.93	78.9	0.094	71.1	0.556	-14.9
		1200	0.090	179.0	3.36	73.7	0.110	70.5	0.560	-17.3
		1500	0.118	158.6	2.76	66.4	0.136	69.8	0.550	-21.0
		2000	0.137	137.7	2.35	59.5	0.161	68.4	0.546	-24.0
	2000	0.155	125.7	2.16	55.6	0.178	67.4	0.548	-26.5	
	20	100	0.576	-45.8	23.38	138.5	0.015	72.0	0.836	-15.8
		300	0.286	-91.7	11.55	106.1	0.034	69.0	0.620	-17.7
		500	0.177	-123.1	7.34	93.4	0.051	71.3	0.565	-14.7
		800	0.113	-161.1	4.69	82.2	0.075	72.4	0.557	-12.6
		1000	0.101	-177.3	3.81	77.1	0.092	72.4	0.568	-13.8
		1200	0.107	168.1	3.24	72.0	0.109	71.9	0.571	-16.4
		1500	0.136	152.5	2.67	64.8	0.159	70.9	0.564	-20.4
		2000	0.160	133.1	2.27	58.1	0.176	69.5	0.559	-23.5
	2000	0.181	124.2	2.09	54.0		68.4	0.560	-25.9	

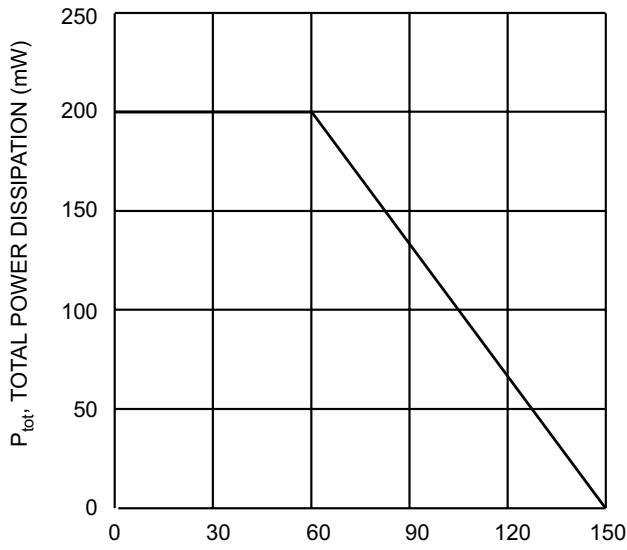


T<sub>A</sub> - AMBIENT TEMPERATURE (°C)  
 Fig. 1 Total Power Dissipation vs. Ambient Temperature

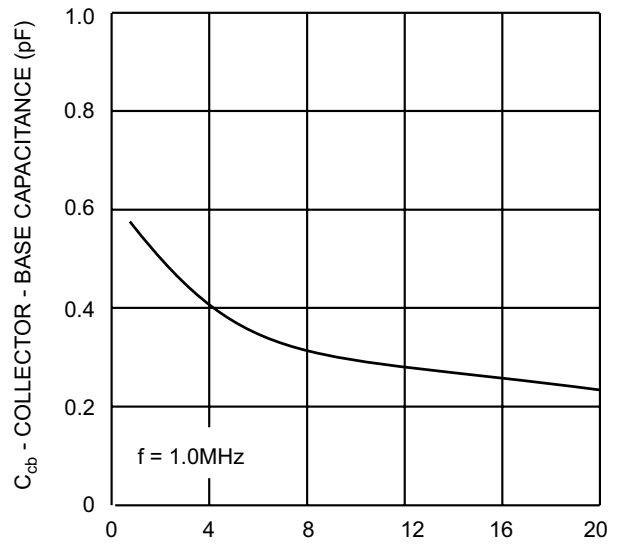

V<sub>CB</sub> - COLLECTOR - BASE VOLTAGE (V)  
 Fig. 2 Collector - Base Capacitance vs. Collector - Base Voltage

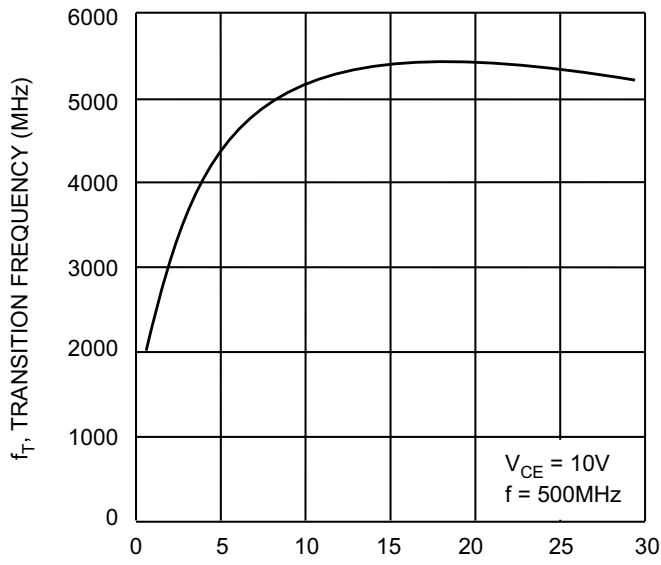

I<sub>C</sub>, COLLECTOR CURRENT (mA)  
 Fig 3. Transition Frequency vs. Collector Current

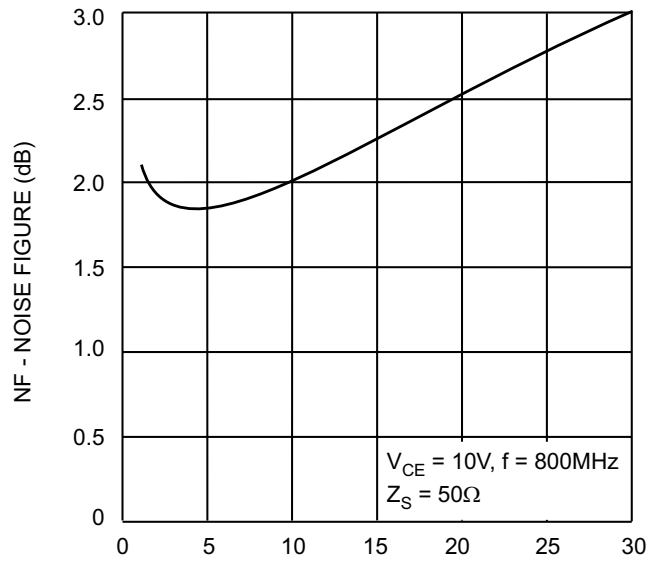

I<sub>C</sub>, COLLECTOR CURRENT (mA)  
 Fig 4. Noise Figure vs. Collector Current

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.