

# SILICON NPN PHOTO DETECTOR

**DESCRIPTION:**

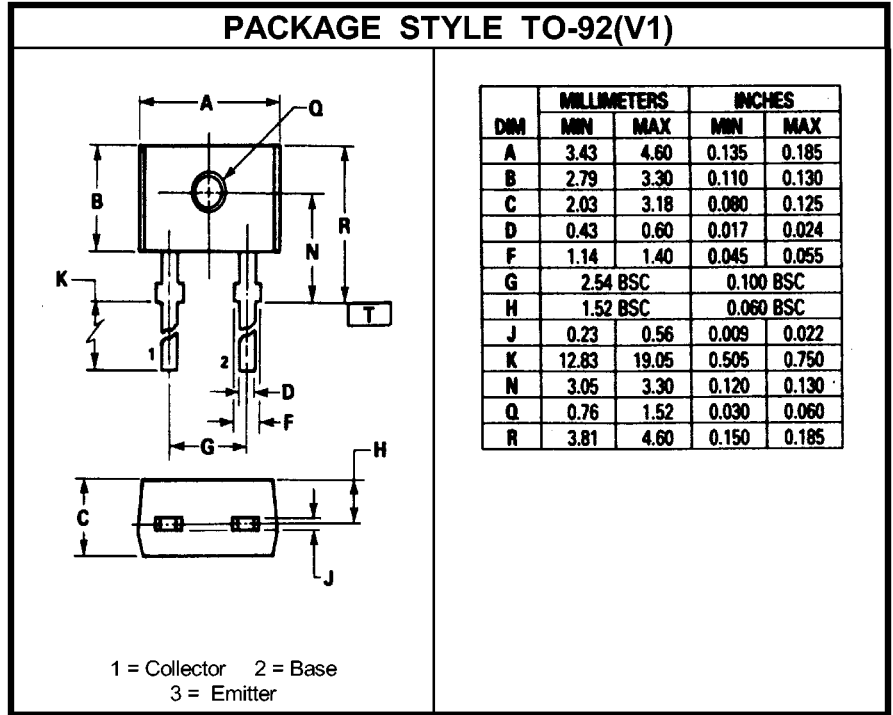
The **2N5777(MOD.)** is Designed for General Purpose Industrial Photo Detector Applications.

**FEATURES:**

- High Sensitivity
- Economical TO-92 compatible package

**MAXIMUM RATINGS**

<b>I<sub>L</sub></b>	250 mA
<b>V<sub>CEO</sub></b>	40 V
<b>P<sub>DISS</sub></b>	250 mW @ T <sub>C</sub> = 25 °C
<b>T<sub>J</sub></b>	-40 to +100 °C
<b>T<sub>ST</sub></b>	-40 to +100 °C


**CHARACTERISTICS**    T<sub>A</sub> = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
I <sub>D</sub>	I <sub>C</sub> = 1 mA	40	60		V
I <sub>L</sub>	V <sub>CE</sub> = 12 V			100	nA
	V <sub>CE</sub> = 5 V      H = 500 μW/cm <sup>2</sup>	5			mA
C <sub>CE</sub>	V <sub>CE</sub> = 10 V      f = 1 MHz		3.2		pF
V <sub>CE(sat)</sub>	V <sub>CE</sub> = 5 V    I <sub>C</sub> = 2 mA    H = 500 μW/cm <sup>2</sup>		0.75	1.0	V
t <sub>on</sub>	V <sub>CE</sub> = 10 V    R <sub>L</sub> = 100 Ω    H = 500 μW/cm <sup>2</sup>		125		μS
t <sub>off</sub>	V <sub>CE</sub> = 10 V    R <sub>L</sub> = 100 Ω    H = 500 μW/cm <sup>2</sup>		150		μS

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.