

## VIDEO IF PROCESSOR FOR B/W TVs

The KA2912 is a silicon monolithic integrated circuit designed for the VIF stage in B/W television receivers.


This IC has all functions, including a video IF amplifier, video low-level detector, RF AGC, IF AGC and noise canceller.

This IC is encapsulated in a 14-pin dual in-line package with heat sink.

## FEATURES

- High input sensitivity: Typ 30 dB $\mu$ .
- It can be used both of keyed type AGC and peak type AGC.
- It can be operated with the power supply voltage above 7V.
- Since the video detector has a wide bandwidth, it's suitable for the sound carrier frequency of 4.5, 5.5, 6.0, 6.5 MHz.
- As input is differential mode, it can be used with an SAW filter.
- All functions of the VIF stage are provided by this single chip IC. This will realize reduction of assembly costs as well as reduction of the number of external components.

14 DIP H/S



## ORDERING INFORMATION

| Device | Package    | Operating Temperature |
|--------|------------|-----------------------|
| KA2912 | 14 DIP H/S | -20 ~ +75°C           |

## BLOCK DIAGRAM

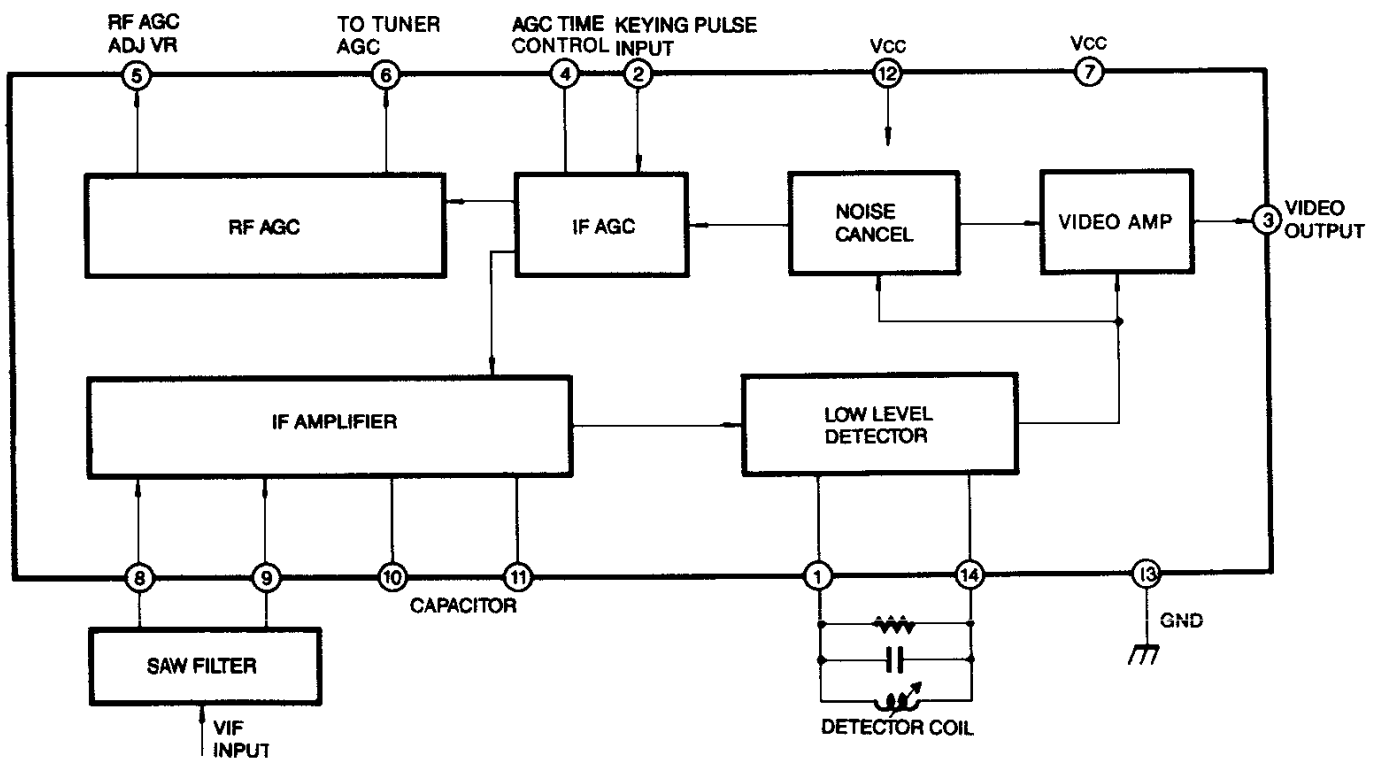


Fig. 1

**ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub> = 25°C)**


| Characteristic        | Symbol                          | Value                                | Unit             |
|-----------------------|---------------------------------|--------------------------------------|------------------|
| Supply Voltage        | V <sub>CC</sub> (Pin 7)         | 15                                   | V                |
| Input Singnal Voltage | V <sub>8</sub> , V <sub>9</sub> | 3                                    | V <sub>P-P</sub> |
| Power Dissipation     | P <sub>D</sub>                  | 875 (T <sub>a</sub> = 75°C) free air | mW               |
| Operating Temperature | T <sub>OPR</sub>                | - 20 ~ + 70                          | °C               |
| Storage Temperature   | T <sub>STG</sub>                | - 40 ~ + 125                         | °C               |

**ELECTRICAL CHARACTERISTICS**(T<sub>a</sub> = 25°C, V<sub>CC</sub> = 12V, f<sub>p</sub> = 45.75MHz, f<sub>m</sub> = 400Hz)


| Characteristic            | Symbol               | Test Conditions  | Min | Typ | Max | Unit             |
|---------------------------|----------------------|--|-----|-----|-----|------------------|
| Total Supply Current      | I <sub>CC</sub>      | I <sub>7</sub> + I <sub>12</sub> , R <sub>A</sub> = 150Ω | 40  | 50  | 60  | mA               |
| Input Sensitivity         | S <sub>VI</sub>      | MOD = 80%, v <sub>O</sub> = 1.4V <sub>P-P</sub>          | —   | 30  | 35  | dBμ              |
| Maximum Input Voltage     | V <sub>I (MAX)</sub> | MOD = 80%, -1dB Point                                    | 100 | —   | —   | dBμ              |
| Video Output Voltage      | V <sub>O</sub>       | MOD = 80%, v <sub>i</sub> = 3mVrms                       | 1.0 | 1.4 | 1.7 | V <sub>P-P</sub> |
| Video Output DC Voltage   | V <sub>O (DC)</sub>  | No Signal  | 3.3 | 3.8 | 4.3 | V                |
| Signal to Noise Ratio     | S/N                  | MOD = 80% - 0%<br>v <sub>i</sub> = 3mVrms                | 40  | 50  | —   | dB               |
| RF AGC Voltage (High)     | V <sub>6H</sub>      | V <sub>5</sub> = 0V                                      | 8   | 9   | 11  | V                |
| RF AGC Voltage (Low)      | V <sub>6L</sub>      | V <sub>5</sub> = 7V                                      | —   | 0   | 0.5 | V                |
| Differential Gain         | D.G.                 | Stair step F <sub>M</sub> = 3.58MHz                      | —   | —   | 10  | %                |
| Differential Phase        | D.P.                 | Stair step F <sub>M</sub> = 3.58MHz                      | —   | —   | 10  | deg              |
| Video Detector Band Width | G <sub>V (F)</sub>   | -3dB Point   | 5.5 | —   | —   | MHz              |
| Input Resistance          | R <sub>IN</sub>      |  | —   | 1.5 | —   | KΩ               |
| Input Capacitance         | C <sub>IN</sub>      |  | —   | 3.3 | —   | pF               |




**INPUT SENSITIVITY**

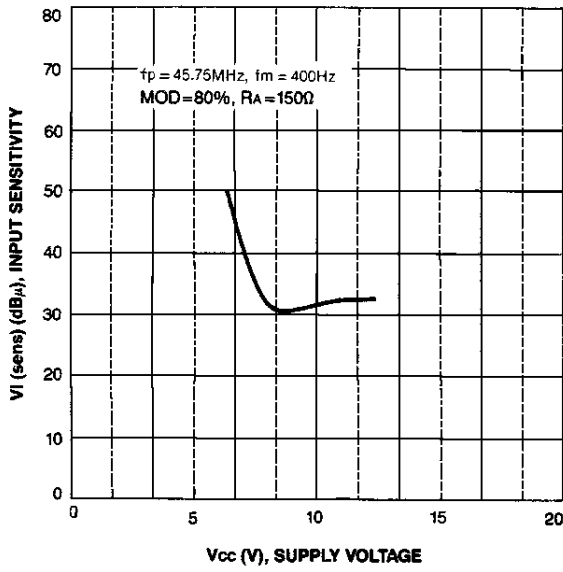


**VIDEO DETECTOR OUTPUT VOLTAGE Vs SUPPLY VOLTAGE**

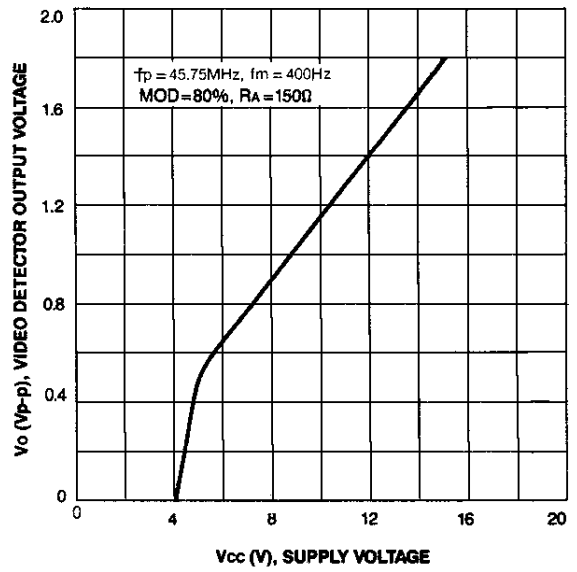

**S/N Vs INPUT VOLTAGE**

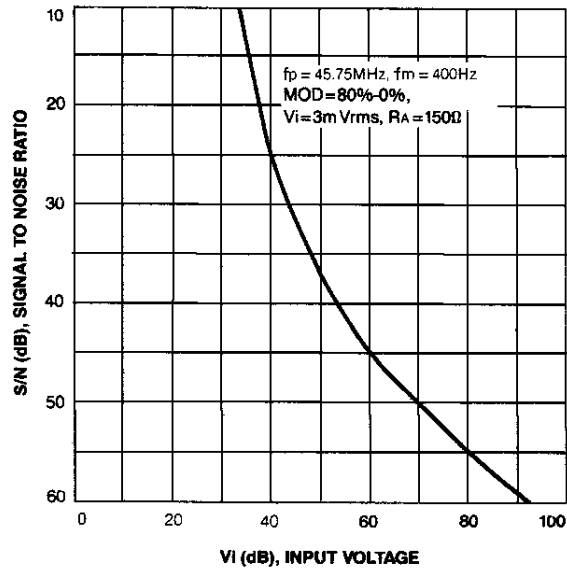

**VIDEO DETECTOR OUTPUT VOLTAGE ATTENUATION Vs FREQUENCY**

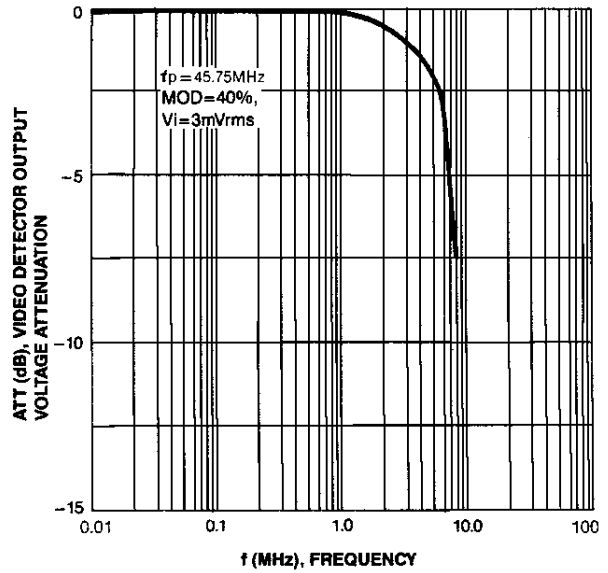



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.