

8514019 SPRAGUE, SEMICONDUCTORS/ICS

93D 03596 D

T-27-90

PLASTIC-CASE BIPOLAR TRANSISTORS

PNP Transistors

'2N' and 'TP' Device Types

ELECTRICAL CHARACTERISTICS at $T_A = 25^\circ\text{C}$

Device Type	I_C Max. (mA)	$V_{(BR)CBO}$ (V)	$V_{(BR)CEO}$ (V)	$V_{(BR)EBO}$ (V)	I_{CBO}		DC Current Gain				$V_{CE(sat)}$		f_T		C_{ob}^1 (pF)	t_s^1 (ns)	NF ¹ (dB)	Process
					Max. @ V_{CB} (nA)	Max. @ V_{CB} (V)	h_{FE} Min.	h_{FE} Max.	@ I_C (mA)	@ V_{CE} (V)	Max. @ I_C (V)	Min. @ I_C (mA)	Min. @ I_C (MHz)	Min. @ I_C (mA)				
2N5087	100	50	50	—	50	35	250	800	0.1	5.0	0.3	10	40	0.5	4.0	—	2.0	BXE
TP5138	100	30	30	5.0	50	20	50	800	0.1	10	0.3	10	30	0.5	7.0	—	—	BXE
TP5139	200	20	20	5.0	50 ³	15	30	—	0.1	10	0.2	10	300	10	5.0	200	—	BTB
2N5142	500	20	20	4.0	50 ³	12	30	—	50	1.0	0.5	50	100	50	10	200	—	JFA
2N5221	500	15	15	3.0	100	10	30	600	50	10	0.5	150	100	20	15	—	—	JFA
2N5226	500	25	25	4.0	300	15	30	600	50	10	0.8	100	50	20	20	—	—	JFA
2N5227	100	30	30	3.0	100	10	50	700	2.0	10	0.4	10	100	10	5.0	—	—	BXE
2N5354	500	25	25	4.0	100	25	40	120	50	1.0	0.25	50	250	2.0	8.0	—	—	JFA
2N5355	500	25	25	4.0	100	25	100	300	50	1.0	0.25	50	250	2.0	8.0	—	—	JFA
2N5356	500	25	25	4.0	100	25	250	500	50	1.0	0.25	50	250	2.0	8.0	—	—	JFA
2N5365	500	40	40	4.0	100	40	40	120	50	1.0	0.25	50	250	2.0	8.0	—	—	JFA
2N5366	500	40	40	4.0	100	40	100	300	50	1.0	0.25	50	250	2.0	8.0	—	—	JFA
2N5367	500	40	40	4.0	100	40	250	500	50	1.0	0.25	50	250	2.0	8.0	—	—	JFA
TP5372	500	60	30	5.0	50	40	40	120	150	10	0.3	150	150	20	10	150	—	JFA
TP5373	500	60	30	5.0	50	40	100	300	150	10	0.3	150	150	20	10	150	—	JFA
TP5374	500	60	30	5.0	50	40	200	400	150	10	0.3	150	150	20	10	175	—	JFA
TP5375	500	40	30	5.0	50	30	40	400	150	10	0.3	150	150	20	10	175	—	JFA
TP5378	500	40	30	5.0	10	30	120	—	1.0	5.0	—	—	—	—	10	—	—	JFA
TP5379	500	40	30	5.0	10	30	100	500	0.1	5.0	0.2	10	200	0.5	—	—	3.0	JFA
TP5382	200	40	40	5.0	50	30	50	—	10	1.0	0.25	10	200	10	4.5	—	5.0	BTB
TP5383	200	40	40	5.0	50	30	100	300	10	1.0	0.25	10	250	10	4.5	—	4.0	BTB
2N5400	300	130	120	5.0	50	100	40	180	10	5.0	0.2	10	100	10	6.0	—	8.0	VHB
2N5401	300	160	150	5.0	50	120	60	240	10	5.0	0.2	10	100	10	6.0	—	8.0	VHB
TP5447	500	40	25	5.0	100	20	60	300	50	5.0	0.25	50	100	50	12	—	—	JFA
TP5448	500	50	30	5.0	100	20	30	150	50	5.0	0.25	50	100	50	12	—	—	JFA
TP5811	800	35	25	5.0	100	25	60	200	2.0	2.0	0.75	500	100	50	15	—	—	JMA
TP5813	800	35	25	5.0	100	25	150	500	2.0	2.0	0.75	500	135	50	15	—	—	JMA
TP5815	800	50	40	5.0	100	25	60	120	2.0	2.0	0.75	500	100	50	15	—	—	JMA
TP5817	800	50	40	5.0	100	25	100	200	2.0	2.0	0.75	500	120	50	15	—	—	JMA
TP5819	800	50	40	5.0	100	25	150	300	2.0	2.0	0.75	500	135	50	15	—	—	JMA
TP5821	800	70	60	5.0	100	25	60	120	2.0	2.0	0.75	500	100	50	15	—	—	JMA
TP5823	800	70	60	5.0	100	25	100	200	2.0	2.0	0.75	500	120	50	15	—	—	JMA
TP5855	1000	60	60	5.0	100	40	50	300	150	10	0.4	150	100	50	15	—	—	DJC
TP5857	1000	80	80	5.0	100	60	50	300	150	10	0.4	150	100	50	15	—	—	DJC
2N5999	500	35	25	5.0	30	25	150	300	10	2.0	0.25	50	140	10	—	—	1.5	JFA
2N6009	500	35	25	5.0	30	25	250	500	10	2.0	0.25	50	140	10	—	—	1.5	JFA
2N6076	500	25	25	5.0	100	25	100	500	10	10	0.25	10	—	—	13	—	—	JFA

NOTES:
 1) Maximum at typical JEDEC conditions.
 2) μA .


3) $V_{(BR)CES}/I_{CES}$, as applicable.
 4) mA.
 5) $V_{(BR)CER}$ at $R = 10\Omega$.

T-91-20

PACKAGE INFORMATION

TO-226AA/STYLE CT


DIMENSIONS IN INCHES

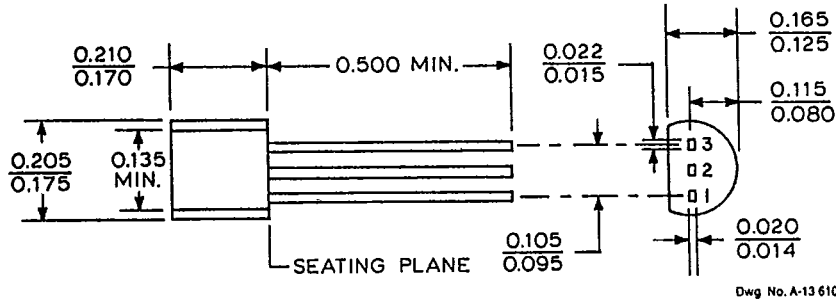

Dwg. No. A-13.610


DIMENSIONS IN MILLIMETERS

Based on 1" = 25.4 mm

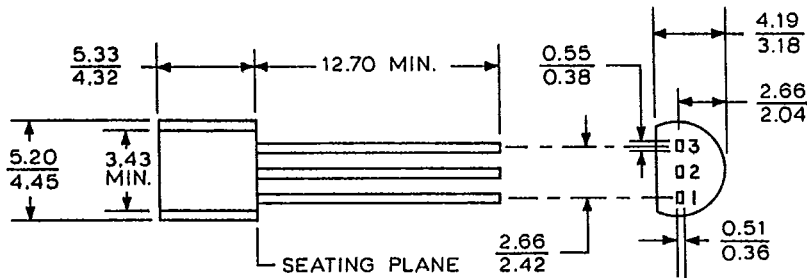

Dwg. No. A-13.611

MAXIMUM ALLOWABLE PACKAGE POWER DISSIPATION AS A FUNCTION OF AMBIENT TEMPERATURE

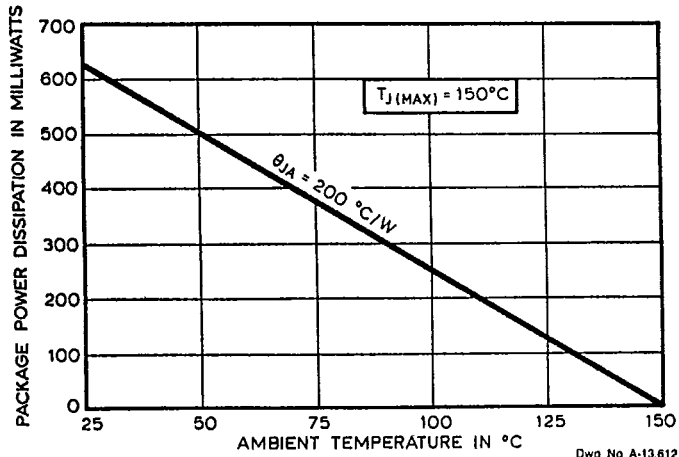

Dwg. No. A-13.612



CT PINOUT

Pin	Terminal
1	Emitter
2	Base
3	Collector

3044


A-01

7-R

T-91-20
PACKAGE INFORMATION

TO-226AA/STYLE CZ


DIMENSIONS IN INCHES

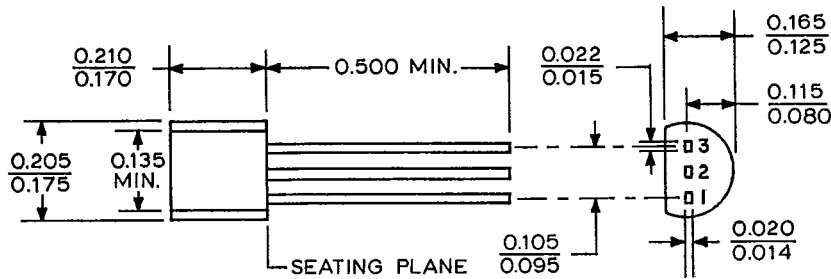

Dwg No. A-13,610


DIMENSIONS IN MILLIMETERS

Based on 1" = 25.4 mm

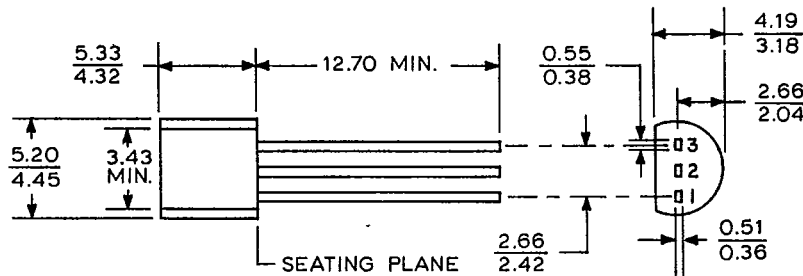

Dwg No. A-13,611

MAXIMUM ALLOWABLE PACKAGE POWER DISSIPATION AS A FUNCTION OF AMBIENT TEMPERATURE

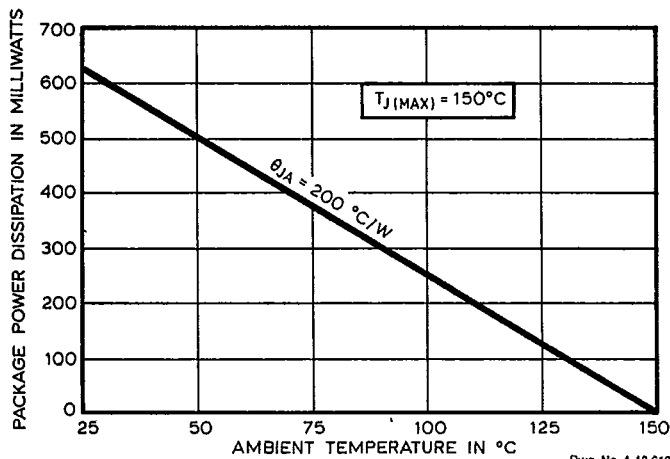

Dwg No A-13 612



CZ PINOUT

Pin	Terminal
1	Emitter
2	Collector
3	Base

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.