



Side Viewing LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 15mA Typical	Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 15mA	Drawing
						Typical	Maximum		
● RED	2	E108	Translucent	2.5mcd	60°	2.1V	2.8V	700nm	B
● ORANGE	3	E109	Translucent	4.0mcd	60°	2.1V	2.8V	610nm	B
● YELLOW	4	E110	Translucent	4.0mcd	60°	2.1V	2.8V	585nm	B
● GREEN	5	E111	Translucent	4.0mcd	60°	2.1V	2.8V	565nm	B

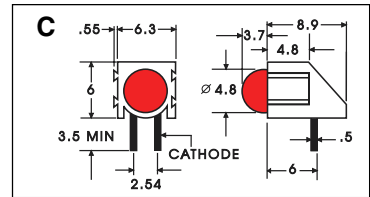



Right Angle, Attachable LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 10mA (*at 20mA)		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● ULTRA BRIGHT RED	6	EA22	Diffused	100mcd	300mcd	60°	1.85V	2.5V	660nm	C
● ULTRA BRIGHT RED	7	EA27	Clear	500mcd	900mcd	30°	1.85V	2.5V	660nm	C
● YELLOW	8	EA20	Diffused	5mcd	20.0mcd	60°	2.1V	2.5V	590nm	C
● GREEN	9	EA21	Diffused	5mcd	20.0mcd	60°	2.2V	2.5V	565nm	C
● GREEN	10	EA25	Diffused	20mcd	60mcd	60°	2.2V	2.5V	565nm	C

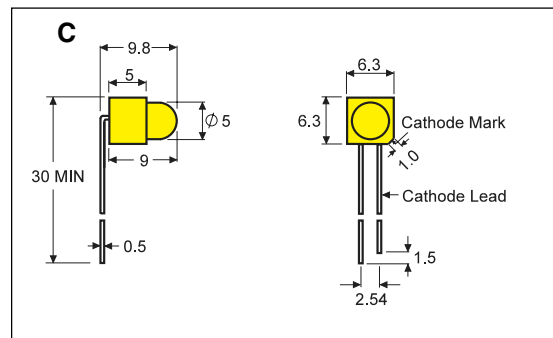


T-1^{3/4}, Right Angle Leads, LEDs (5mm)

	Line No.	Part No.	Lens	Luminous Intensity at 10mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● RED	9	E241	Diffused	12.5mcd	32.0mcd	60°	2.0V	2.5V	625nm	C
● ORANGE	10	E242	Diffused	12.5mcd	32.0mcd	60°	2.0V	2.6V	610nm	C
● YELLOW	11	E244	Diffused	5.0mcd	20.0mcd	60°	2.1V	2.5V	590nm	C
● GREEN	12	E246	Diffused	5.0mcd	20.0mcd	60°	2.2V	2.5V	565nm	C

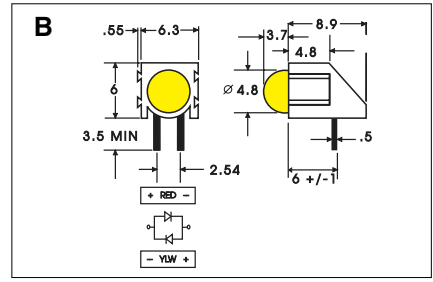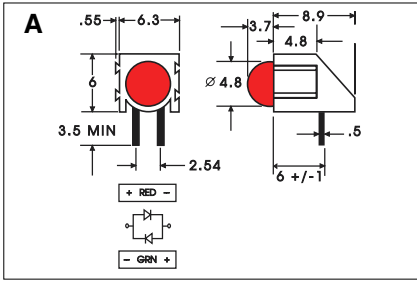


Right Angle, Attachable, Bi-Color LEDs


	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● RED & ● GREEN	1	EA28	White Diffused	20.0mcd	50.0mcd	60°	2.0V	2.5V	625nm	A
				12.5mcd	40.0mcd	60°	2.2V	2.5V	565nm	
● RED & ● YELLOW	2	EA29	White Diffused	20.0mcd	50.0mcd	60°	2.0V	2.5V	625nm	B
				5.0mcd	20.0mcd	60°	2.1V	2.5V	590nm	

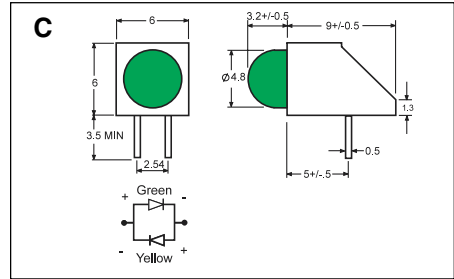

Right Angle Bi-Color LEDs


	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● GREEN & ● YELLOW	3	EA300	White Diffused	12.5mcd	40.0mcd	60°	2.2V	2.5V	565nm	C
				5.0mcd	20.0mcd	60°	2.1V	2.5V	590nm	

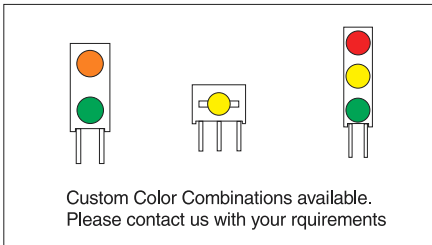

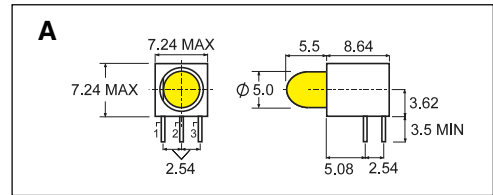


Right Angle, Bi-Color LEDs (Three Leads)

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Leads	Drawing
				Minimum	Maximum		Typical	Maximum			
● RED & GREEN	1	E249	White Diffused	100mcd	300mcd	60° 60°	1.85V 2.2V	2.5V 2.5V	660nm 565nm	1. Red Anode 2. Cathode 3. Green Anode	A
● RED & GREEN	2	E250	White Diffused	20mcd	90mcd	60° 60°	2.0V 2.2V	2.5V 2.5V	625nm 565nm	1. Red Anode 2. Cathode 3. Green Anode	A
● RED & YELLOW	3	E247	White Diffused	20mcd	90mcd	60° 60°	2.0V 2.1V	2.5V 2.5V	625nm 590nm	1. Red Anode 2. Cathode 3. Yellow Anode	A
● YELLOW & GREEN	4	E248	White Diffused	20mcd	60mcd	60° 60°	2.1V 2.2V	2.5V 2.5V	590nm 565nm	1. Yellow Anode 2. Cathode 3. Green Anode	A

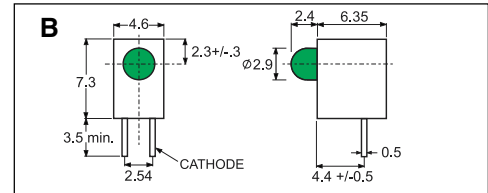


Right Angle, T-1 LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
ULTRA BRIGHT ● RED	5	EA100	Translucent	360mcd	500mcd	50°	1.85V	2.50V	660nm	B
● YELLOW	6	EA104	Translucent	20mcd	100mcd	50°	2.10V	2.50V	590nm	B
● GREEN	7	EA106	Translucent	100mcd	300mcd	50°	2.20V	2.50V	565nm	B

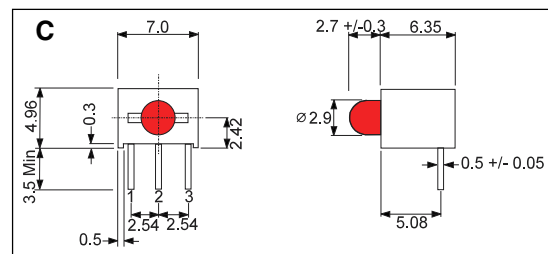


Right Angle, Bi-Color, T-1, Low Profile, LED

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Leads	Drawing
				Minimum	Maximum		Typical	Maximum			
● RED & GREEN	8	EA202	White Diffused	8mcd	40mcd	60° 60°	2.0V 2.2V	2.5V 2.5V	625nm 565nm	1.Red Anode 2.Cathode 3.Green Anode	C
● GREEN & YELLOW	9	EA207	White Diffused	8mcd	40mcd	60° 60°	2.0V 2.1V	2.5V 2.5V	565nm 590nm	1.Green Anode 2.Cathode 3.Yellow Anode	C
● RED & YELLOW	10	EA208	White Diffused	8mcd	40mcd	60° 60°	2.0V 2.2V	2.5V 2.5V	625nm 590nm	1.Red Anode 2.Cathode 3.Yellow Anode	C

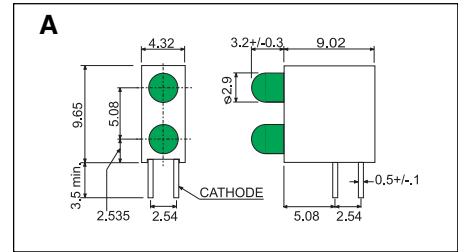


Right Angle, Bi-Level, T-1 LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 20½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● ULTRA BRIGHT RED	1	EA200	Red Diffused	100mcd	300mcd	60°	1.85V	2.5V	660nm	A
● GREEN	2	EA201	Green Diffused	8mcd	32mcd	60°	2.2V	2.5V	565nm	A

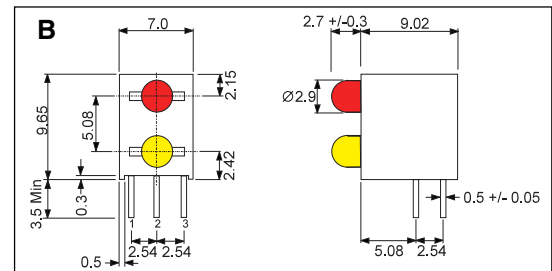


Right Angle, Bi-Level, Bi-Color, T-1 LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 20½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Leads	Drawing
				Minimum	Maximum		Typical	Maximum			
● RED & GREEN	3	EA203	White Diffused	8mcd	40mcd	60°	2.0V	2.5V	625nm 565nm	1.Red Anode 2.Cathode 3.Green Anode	B
● RED & YELLOW	4	EA205	White Diffused	8mcd	40mcd	60°	2.0V	2.5V	625nm 590nm	1.Red Anode 2.Cathode 3.Yellow Anode	B
● GREEN & YELLOW	5	EA206	White Diffused	8mcd	40mcd	60°	2.2V	2.5V	565nm 590nm	1.Green Anode 2.Cathode 3.Yellow Anode	B

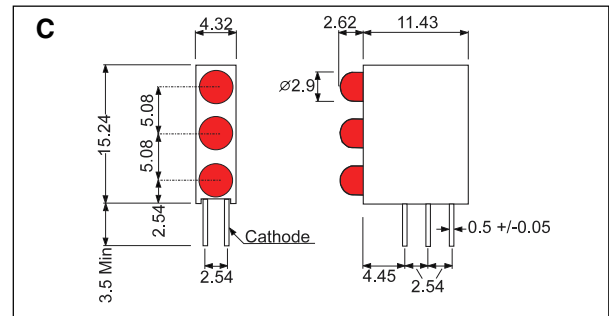


Right Angle, Tri-Level, T-1 LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 10mA		Viewing Angle 20½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● RED	6	EA331	Diffused	12.5mcd	50.0mcd	60°	2.0V	2.5V	625nm	C
● GREEN	7	EA336	Diffused	8.0mcd	32.0mcd	60°	2.2V	2.5V	565nm	C

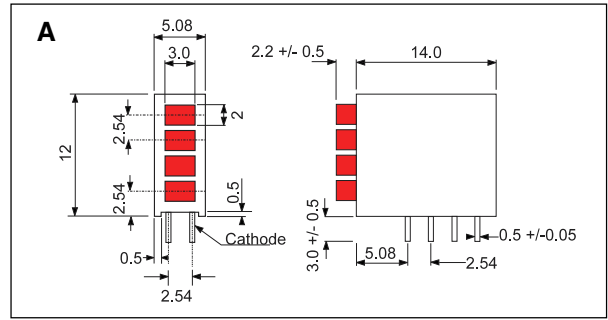


Right Angle, Quad-Level, Mini LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 10mA		Viewing Angle 20½°	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● RED	1	EA401	Diffused	2.0mcd	12.5mcd	100°	2.0V	2.5V	625nm	A
● YELLOW	2	EA404	Diffused	2.0mcd	5.0mcd	100°	2.1V	2.5V	590nm	A
● GREEN	3	EA406	Diffused	2.0mcd	5.0mcd	100°	2.2V	2.5V	565nm	A
● RED & GREEN	4	EA444GR	White	8.0mcd	32.0mcd	100°	2.0V	2.5V	625nm	A
● GREEN			Diffused	8.0mcd	32.0mcd	100°	2.2V	2.5V	565nm	
● GREEN & YELLOW	5	EA444GY	White	8.0mcd	32.0mcd	100°	2.2V	2.5V	565nm	A
● YELLOW			Diffused	5.0mcd	20.0mcd	100°	2.2V	2.5V	590nm	

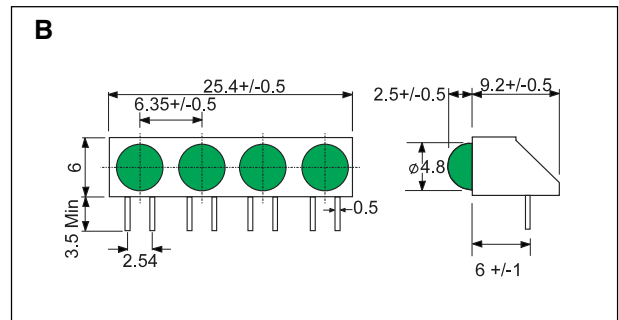

Right Angle, Quad LEDs

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 20½°	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
● ULTRA BRIGHT RED	6	EA430	Diffused	100.0mcd	300.0mcd	60°	1.85V	2.5V	660nm	B
● SUPER BRIGHT GREEN	7	EA432	Diffused	20.0mcd	60.0mcd	60°	2.2V	2.5V	565nm	B

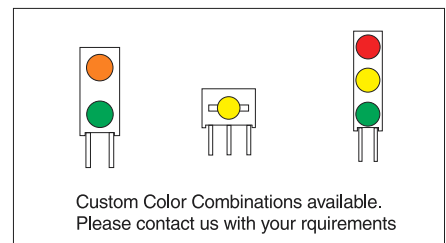



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.