


# SI-7200E, SI-7230E Series

## Stepping Motor Driver

### Features:


Effective power saving, high torque and fast transient response.

- 1) Chopped constant current drive  
made it unnecessary to put series resistor.
- 2) Full bridge bipolar driver  
made it possible to use the coils of motor effectively.
- 3) Surge voltage utilization  
reuses the inductive energy by charging it to capacitor, which does not require damping circuit.

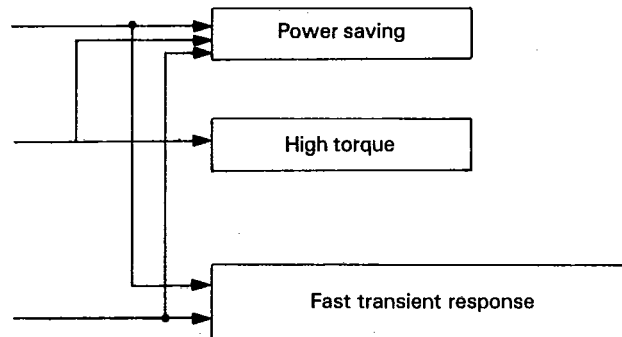

The IC makes total system compact because of low power dissipation and because of integrated circuit utilization. Output torque can be controlled easily by PWM circuit. It can be applied to the double1-2 phase excitation motors.

Outline Drawings Unit: mm

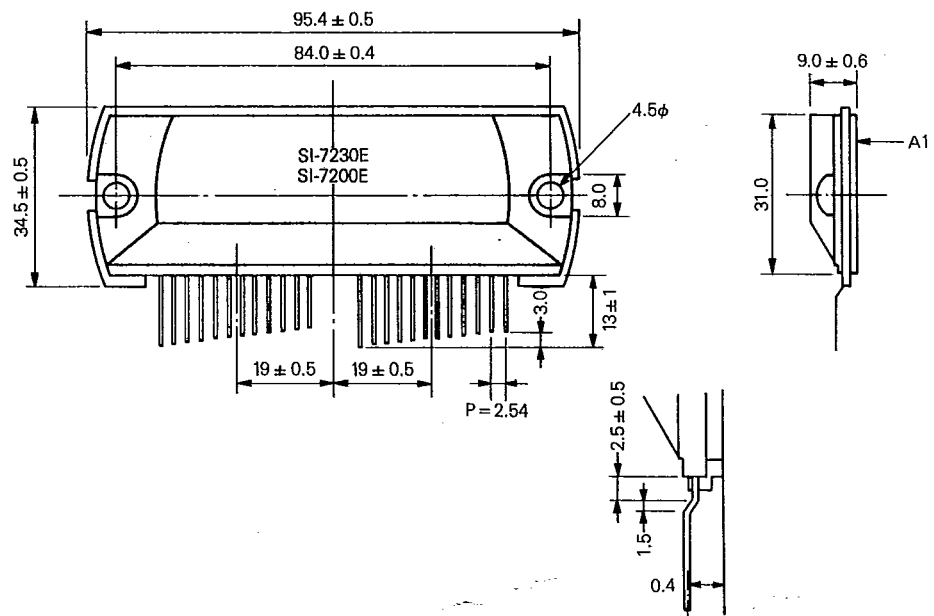

### Absolute Maximum Ratings (Ta = 25°C)

| Description           | Symbol | Unit | Rating     |          |
|-----------------------|--------|------|------------|----------|
|                       |        |      | SI-7200E   | SI-7230E |
| Supply Voltage        | Vcc    | V    | 60         |          |
| Surge Voltage         | Vcc    | V    | 70(Surge)  |          |
| Output Current        | Io     | A    | 1.2        | 3.0      |
| Junction Temperature  | Tj     | °C   | 125        |          |
| Operating Temperature | Top    | °C   | -20 ~ +80  |          |
| Storage Temperature   | Tstg   | °C   | -30 ~ +100 |          |


T-52-13-25

# SI-7200E, SI-7230E Series


Electrical Characteristics (Ta=25°C)

| Description    | Symbol | Unit | Rating   |     |     |          |     |     |
|----------------|--------|------|----------|-----|-----|----------|-----|-----|
|                |        |      | SI-7200E |     |     | SI-7230E |     |     |
|                |        |      | MIN      | TYP | MAX | MIN      | TYP | MAX |
| Supply Voltage | Vcc    | V    | 20       |     | 50  | 20       |     | 50  |
| Output Current | Io     | A    |          |     | 1.0 |          |     | 2.5 |
| Input Current  | IIN    | mA   |          |     | 1.6 |          |     | 1.6 |


SI-7200E Equivalent Circuit

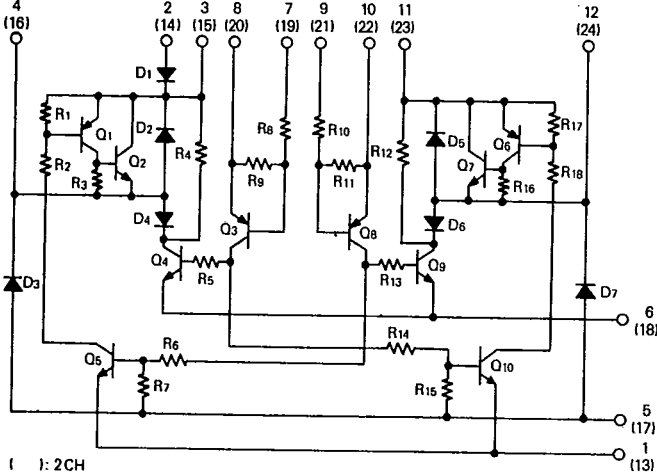

SI-7230E Equivalent Circuit

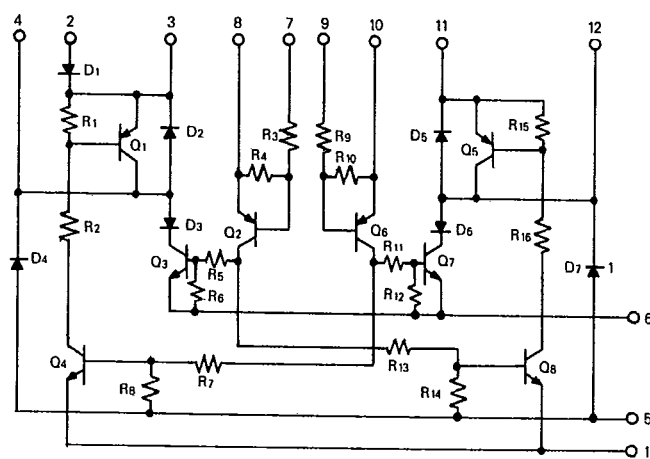

SI-7200E, SI-7230E Connections

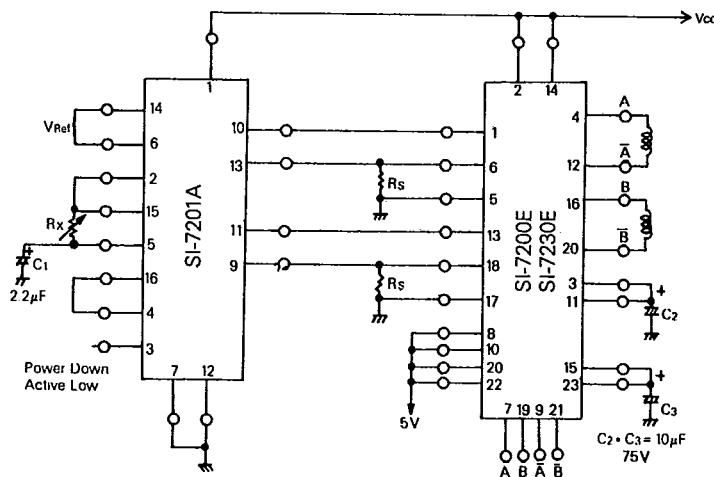


V<sub>ref</sub> = Reference Voltage (0.8V) Rx = 0  
 Coil Current =  $\frac{V_{ref}}{R_s}$


1-phase, 2-phase or 1/2 phase  
 Active Low

T-52-13-25  
Stepping Motor Driver


SI-7200E Derating

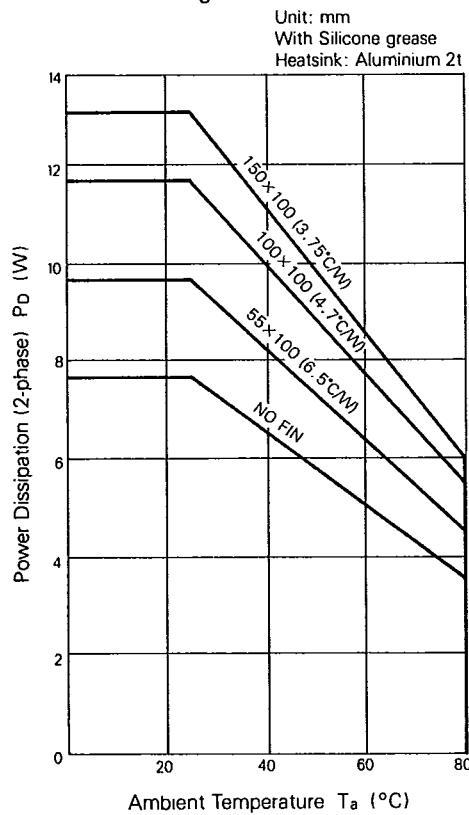


SI-7230E Derating

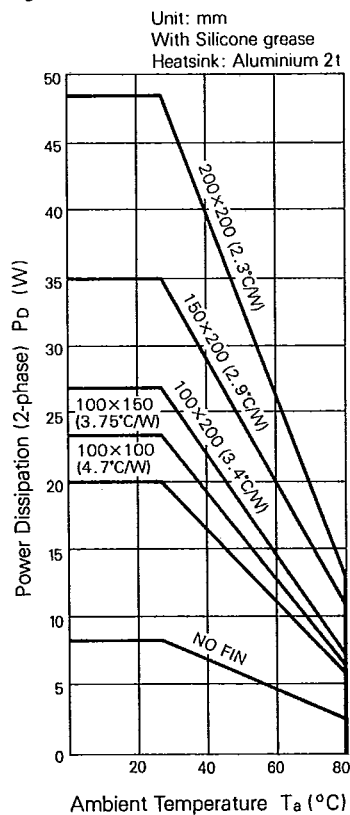

SI-7200E  
Power Dissipation (1-phase) vs.  
Coil Current Characteristics

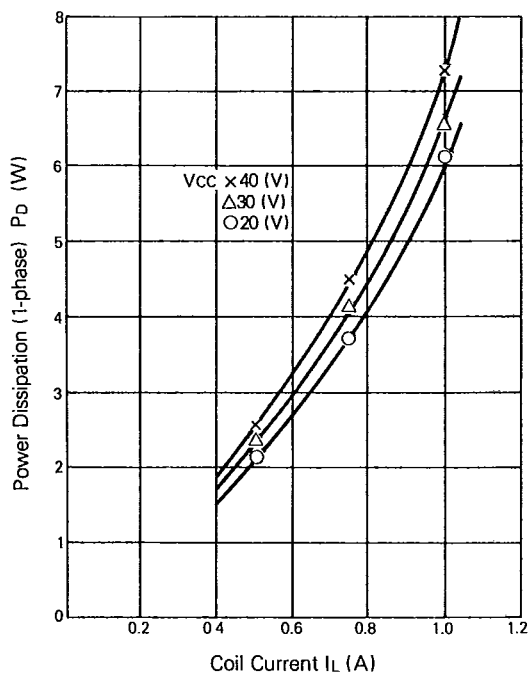


SI-7230E  
Power Dissipation (1-phase) vs.  
Coil Current Characteristics

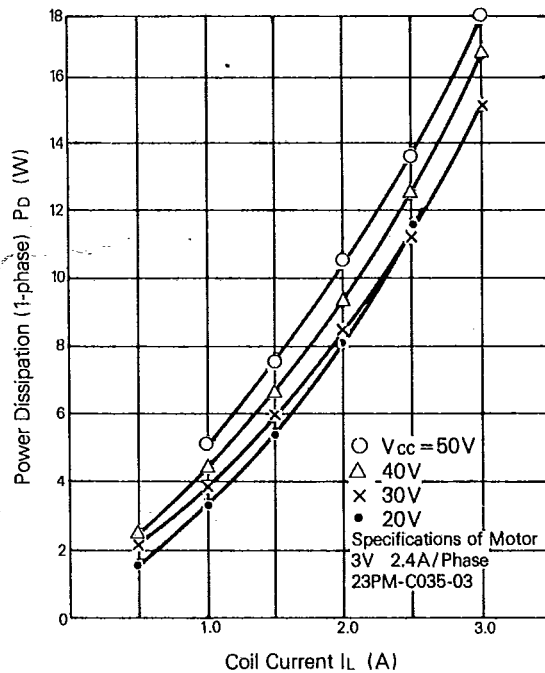


# SI-7200E, SI-7230E Series


SI-7200E Power Dissipation (1-phase) vs. Supply Voltage Characteristics

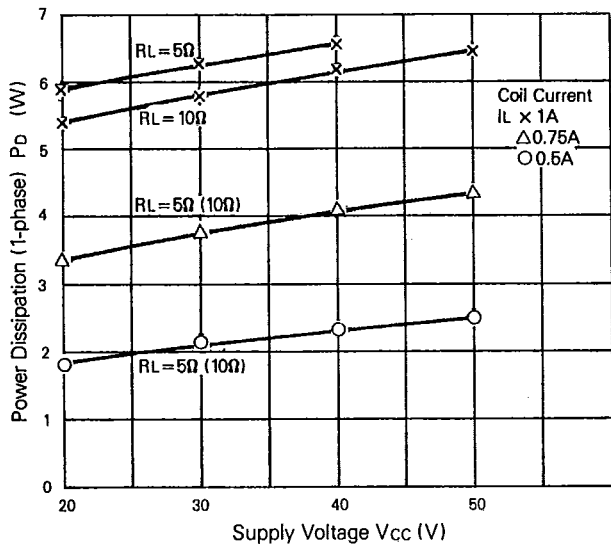


SI-7200E Power Dissipation (1-phase) vs. Coil Resistance Characteristics

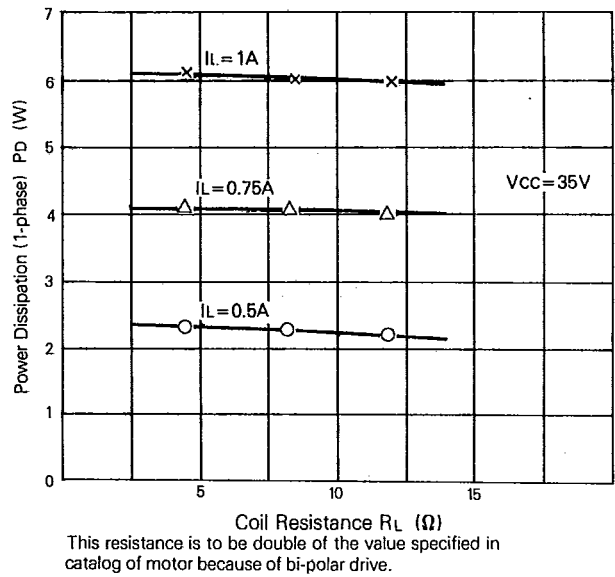

SI-7200E Operating Voltage Range

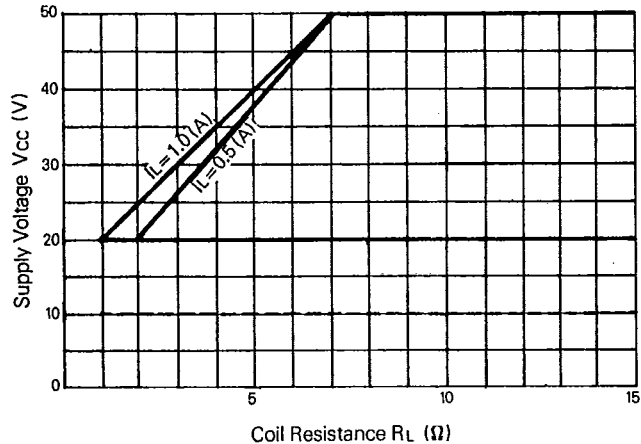

SI-7200E Thermal Resistance vs. Fin Characteristics

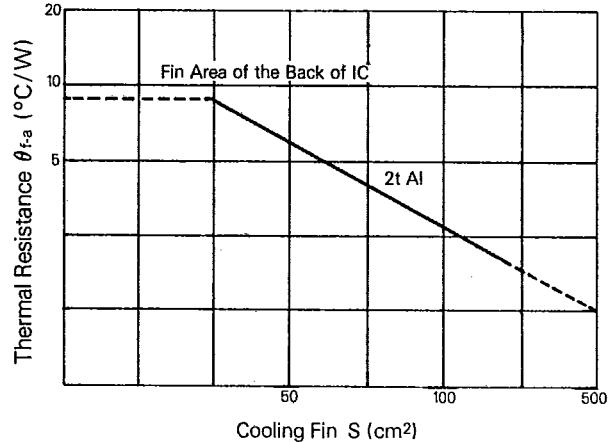

Single-Dual Phase Excitation

Time Chart

|    | A | B | $\bar{A}$ | $\bar{B}$ | Ad | Bd |
|----|---|---|-----------|-----------|----|----|
| 1  | 0 | 1 | 1         | 1         | 1  | 1  |
| 2  | 0 | 0 | 1         | 1         | 1  | 0  |
| 3  | 0 | 0 | 1         | 1         | 1  | 1  |
| 4  | 0 | 0 | 1         | 1         | 0  | 1  |
| 5  | 1 | 0 | 1         | 1         | 1  | 1  |
| 6  | 1 | 0 | 0         | 1         | 0  | 1  |
| 7  | 1 | 0 | 0         | 1         | 1  | 1  |
| 8  | 1 | 0 | 0         | 1         | 1  | 0  |
| 9  | 1 | 1 | 0         | 1         | 1  | 1  |
| 10 | 1 | 1 | 0         | 0         | 1  | 0  |
| 11 | 1 | 1 | 0         | 0         | 1  | 1  |
| 12 | 1 | 1 | 0         | 0         | 0  | 1  |
| 13 | 1 | 1 | 1         | 0         | 1  | 1  |
| 14 | 0 | 1 | 1         | 0         | 0  | 1  |
| 15 | 0 | 1 | 1         | 0         | 1  | 1  |
| 16 | 0 | 1 | 1         | 0         | 1  | 0  |
| 1  | 0 | 1 | 1         | 1         | 1  | 1  |

