



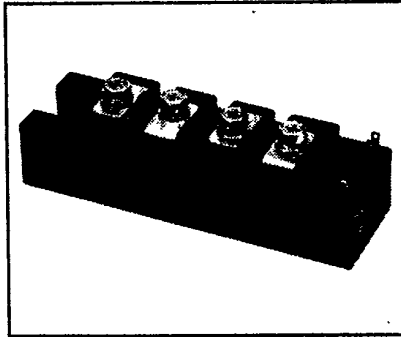

JT224505  
JT225005 Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

**Split-Dual FETMOD™  
Power Modules  
50 Amperes/450-500 Volts**

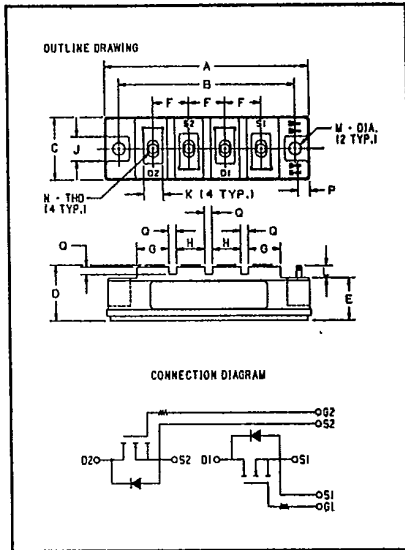

**JT224505  
JT225005  
Split-Dual FETMOD™  
Power Modules  
50 Amperes/450-500 Volts**

**Description**

Powerex Split-Dual FETMOD™ Power Modules are designed for use in applications requiring high-frequency switching and low loss control. The modules are isolated, consisting of two MOSFETs with internal series gate resistors and independent connections.

**Features:**

- Isolated Mounting
- Vertical DMOS Chips
- High Speed Body Diode
- Low Drive Requirement
- Low  $R_{DS(on)}$
- Internal Series Gate Resistors
- Fast Switching

**Applications:**

- Choppers
- UPS Inverters
- Switch Mode Power Supply
- PWM Regulators
- Welding Power Supply

**Ordering Information**

Example: Select the complete eight digit module part number you desire from the table - i.e. JT225005 is a 500 Volt, 50 Ampere Split-Dual FETMOD™ Module.

**450-500 Volts JT224505, JT225005  
Outline Drawing**

| Dimension | Inches       | Millimeters |
|-----------|--------------|-------------|
| A         | 4.252 Max.   | 108 Max.    |
| B         | 3.661 ± .012 | 93 ± 0.3    |
| C         | 1.338 Max.   | 34 Max.     |
| D         | 1.181 Max.   | 30 Max.     |
| E         | .906         | 23          |
| F         | .748         | 19          |
| G         | .650         | 16.5        |
| H         | .591         | 15          |
| J         | .512         | 13          |
| K         | .394         | 10          |
| L         | .256 Min.    | 6.5 Min.    |
| M         | .256 Dia.    | 6.5 Dia.    |
| N         | M5 Metric    | M5          |
| P         | .197         | 5           |
| Q         | .157         | 4           |

| Type | V <sub>DS</sub><br>Volts (×10) | Current Rating<br>Amperes (×10) |
|------|--------------------------------|---------------------------------|
| JT22 | 45                             | 05                              |
| JT22 | 50                             | 05                              |



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224505

JT225005

Split-Dual FETMOD™ Power Modules

50 Amperes/450-500 Volts

Maximum Ratings  $T_J = 25^\circ\text{C}$  unless otherwise specified

|   | Symbol           | JT224505/JT225005 | Units            |
|---|------------------|-------------------|------------------|
| Junction Temperature                      | $T_J$            | - 40 to 150       | $^\circ\text{C}$ |
| Storage Temperature                       | $T_{\text{STG}}$ | - 40 to 125       | $^\circ\text{C}$ |
| Drain Source Voltage                      | $V_{\text{DSS}}$ | 450/500           | Volts            |
| Gate-Source Voltage                       | $V_{\text{GSS}}$ | $\pm 20$          | Volts            |
| Continuous Drain Current                  | $I_D$            | 40                | Amperes          |
| Continuous Source Current                 | $I_S$            | 40                | Amperes          |
| Pulsed Drain Current Repetitive           | $I_{\text{DM}}$  | 150               | Amperes          |
| Power Dissipation                         | $P_T$            | 420               | Watts            |
| Max. Mounting Torque Terminal Screws (M5) | —                | 17                | in.-lb.          |
| Max. Mounting Torque Mounting Screws (M6) | —                | 26                | in.-lb.          |
| Module Weight                             | —                | 250               | Grams            |
| V isolation                               | $V_{\text{RMS}}$ | 2500              | Volts            |

Static Electrical Characteristics  $T_J = 25^\circ\text{C}$  unless otherwise specified

| Characteristics                                | Symbol                | Test Conditions  | JT224505/JT225005 |      |      | Units              |
|--|-----------------------|--|-------------------|------|------|--------------------|
|  |                       |  | Min.              | Typ. | Max. |                    |
| Zero Gate Voltage Drain Current                | $I_{\text{DSS}}$      | $V_{\text{DS}} = V_{\text{DSS}}, V_{\text{GS}} = 0\text{V}$                                  | —                 | —    | 1    | mA                 |
| Zero Gate Voltage Drain Current                | $I_{\text{DSS}}$      | $V_{\text{DS}} = 0.8 V_{\text{DSS}}, V_{\text{GS}} = 0\text{V}$<br>$T_J = 150^\circ\text{C}$ | —                 | —    | 10   | mA                 |
| Gate Source Threshold                          | $V_{\text{GS(th)}}$   | $I_D = 1 \text{ mA}, V_{\text{DS}} = 10\text{V}$   | 2                 | 3    | 4    | Volts              |
| Gate Source Leakage                            | $\pm I_{\text{GSS}}$  | $\pm V_{\text{GS}} = \pm 20\text{V}$<br>$V_{\text{DS}} = 0\text{V}$                          | —                 | —    | 0.5  | $\mu\text{A}$      |
| Drain Source On State Resistance*              | $R_{\text{DS(on)}}$   | $V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}$   | —                 | —    | 0.12 | $\Omega$           |
|  |                       | $V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}, T_J = 150^\circ\text{C}$                      | —                 | —    | 0.24 | $\Omega$           |
| Drain Source On State Voltage*                 | $V_{\text{DS(on)}}$   | $V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}$   | —                 | —    | 6    | Volts              |
|  |                       | $V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}, T_J = 150^\circ\text{C}$                      | —                 | —    | 12   | Volts              |
| Thermal Resistance, Case to Sink<br>Lubricated | $R_{\theta\text{CS}}$ | —  | —                 | —    | —    | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction to Case           | $R_{\theta\text{JC}}$ | Per Device   | —                 | —    | 0.3  | $^\circ\text{C/W}$ |

\* Pulse Test: Pulse width  $\leq 10\mu\text{s}$



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224505

JT225005

Split-Dual FETMOD™ Power Modules

50 Amperes / 450-500 Volts

Source-Drain Diode Characteristics  $T_J = 25^\circ\text{C}$  unless otherwise specified

| Characteristics       | Symbol   | Test Conditions   | JT224505/JT225005 |      |      | Units         |
|-----------------------|----------|---|-------------------|------|------|---------------|
|                       |          |   | Min.              | Typ. | Max. |               |
| Source-Drain Voltage  | $V_{SD}$ | $I_S = 50\text{A}$ , $V_{GS} = 0\text{V}$                                       | —                 | —    | 2.5  | Volts         |
| Reverse Recovery Time | $t_{rr}$ | $I_S = 50\text{A}$ , $di_S/dt = 100\text{A}/\mu\text{s}$ , $V_{GS} = 0\text{V}$ | —                 | —    | 200  | $\mu\text{s}$ |

Dynamic Electrical Characteristics  $T_J = 25^\circ\text{C}$  unless otherwise specified

| Characteristics              | Symbol    | Test Conditions   | JT224505/JT225005 |      |      | Units |
|------------------------------|-----------|---|-------------------|------|------|-------|
|                              |           |   | Min.              | Typ. | Max. |       |
| Forward Transconductance     | $g_{fs}$  | $I_D = 25\text{A}$ , $V_{DS} = 10\text{V}$<br>$t_w \leq 300\mu\text{s}$ , Duty = 2% | 10                | —    | —    | mhos  |
| Input Capacitance            | $C_{iss}$ |   | —                 | 5500 | 9000 | pf    |
| Output Capacitance           | $C_{oss}$ | $V_{GS} = 0\text{V}$ , $V_{DS} = 10\text{V}$ , $f = 1\text{ Mhz}$                   | —                 | —    | 2500 | pf    |
| Reverse Transfer Capacitance | $C_{rss}$ |   | —                 | —    | 1000 | pf    |
| Total Gate Charge            | $Q_G$     | $V_{DD} = 0.8 V_{DSS}$<br>$V_{GS} = 10\text{V}$ , $I_D = 50\text{A}$                | —                 | 600  | —    | nC    |
| Turn On Time**               | $t_{on}$  | $V_{DD} = 0.5 V_{DSS}$  | —                 | —    | 500  | ns    |
| Turn Off Time**              | $t_{off}$ | $I_D = 25\text{A}$ , $V_{GS} = 15\text{V}$<br>$R_{GEN} = R_{GS} = 50\Omega$         | —                 | —    | 1300 | ns    |

\*\* Turn on Time ( $t_{on}$ ) = Turn on Delay ( $t_{d(on)}$ ) + Rise Time ( $t_r$ )  
Turn-off Time ( $t_{off}$ ) = Turn off Delay ( $t_{d(off)}$ ) + Fall Time ( $t_f$ )



Tentative










Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224505

JT225005

Split-Dual FETMOD™ Power Modules

50 Amperes / 450-500 Volts

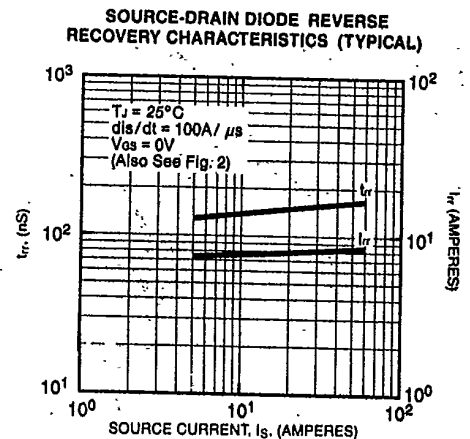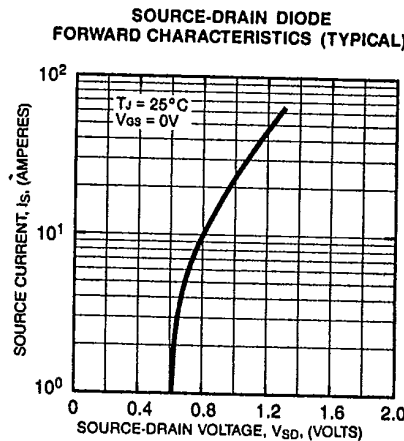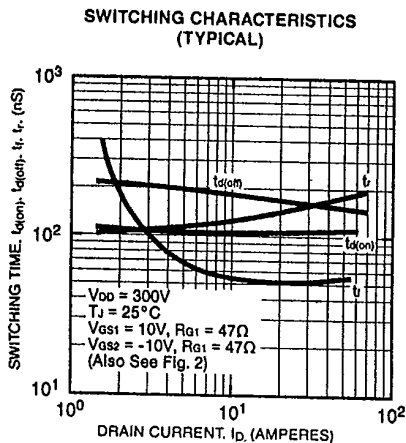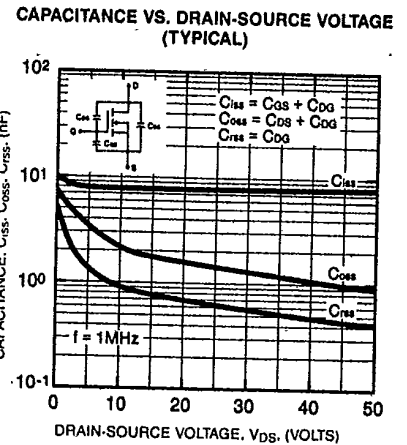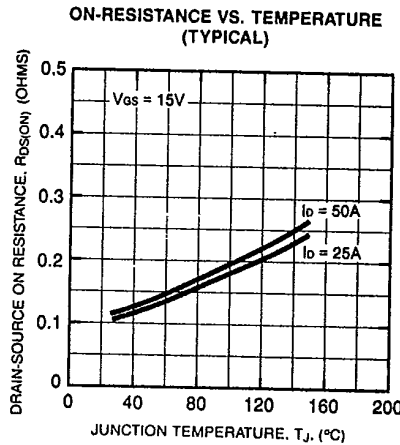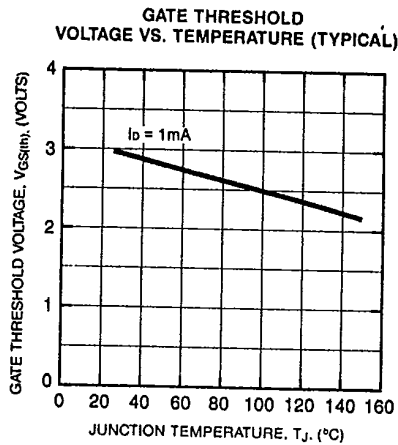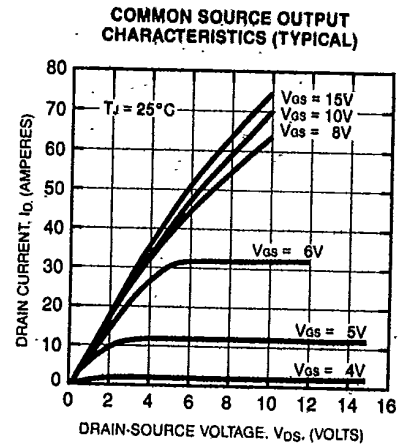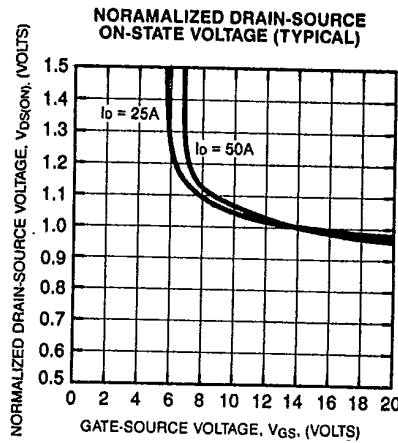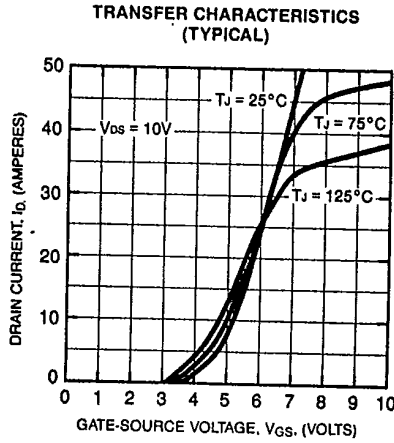




Tentative


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

**JT224505**  
**JT225005**  
 Split-Dual FETMOD™ Power Modules  
 50 Amperes/450-500 Volts


**FORWARD BIAS SAFE OPERATING AREA (S.O.A.)**

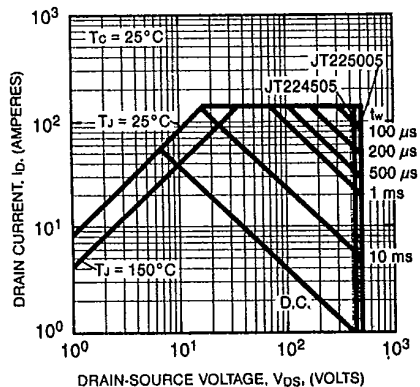


**TEMPERATURE DERATING FACTOR OF SAFE OPERATING AREA (S.O.A.)**

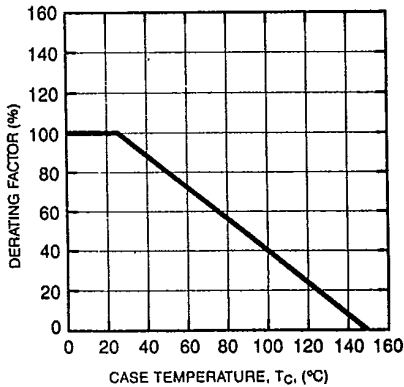


**DUTY CYCLE DERATING FACTOR OF SAFE OPERATING AREA (S.O.A.)**

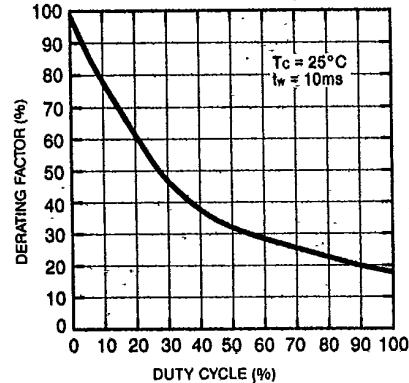


**MAXIMUM DRAIN CURRENT VS. CASE TEMPERATURE**

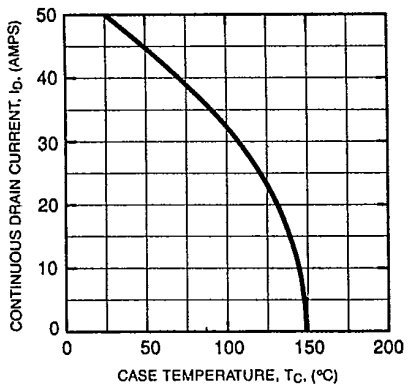


**CLAMPED INDUCTIVE LOAD SWITCHING SAFE OPERATING AREA (S.S.O.A.)**

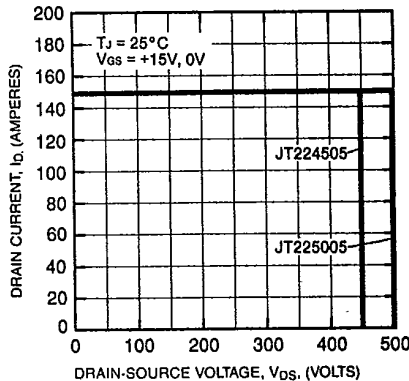


**MAXIMUM TURN-OFF di/dt VS. PEAK DRAIN-SOURCE VOLTAGE**

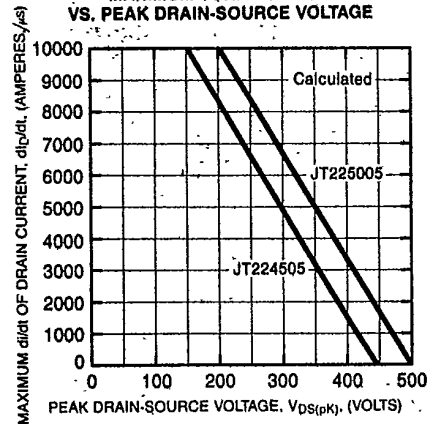


**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (MOSFET)**

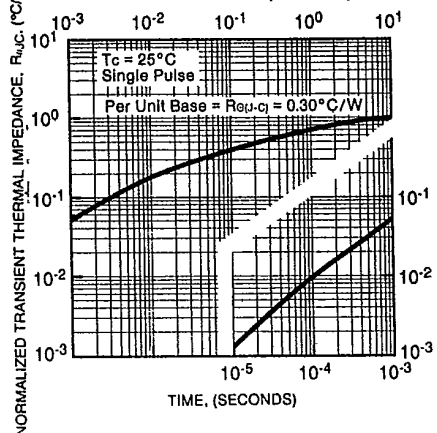

**GATE CHARGE VS. Vds AND Vgs (TYPICAL)**

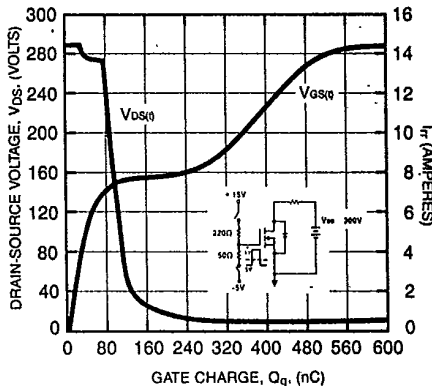

**TURN-ON SPEED VS. GATE RESISTANCE (TYPICAL)**

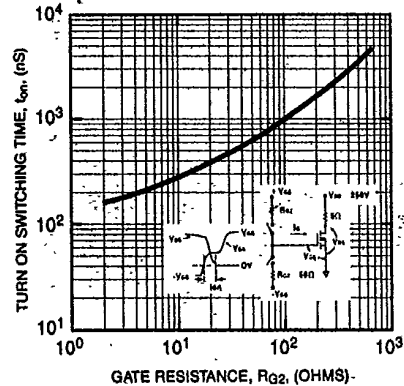



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272


JT224505

JT225005


Split-Dual FETMOD™ Power Modules

50 Amperes/450-500 Volts

TURN-OFF SPEED AND DRAIN-SOURCE VOLTAGE SPIKE VS. GATE RESISTANCE (TYPICAL)

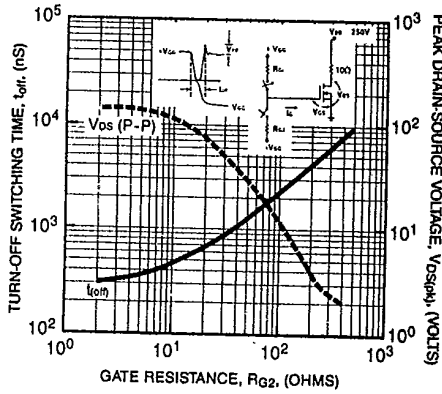

SOURCE-DRAIN DIODE REVERSE RECOVERY CHARACTERISTICS (TYPICAL FOR HALF BRIDGE OPERATION)

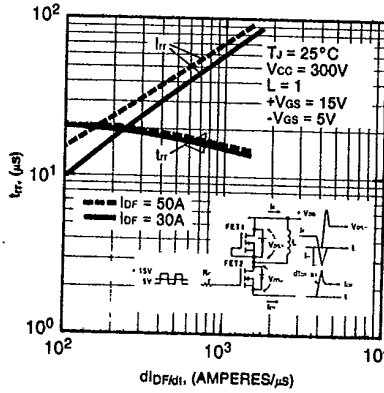

SOURCE-DRAIN DIODE REVERSE RECOVERY CHARACTERISTICS (TYPICAL FOR HALF BRIDGE OPERATION)

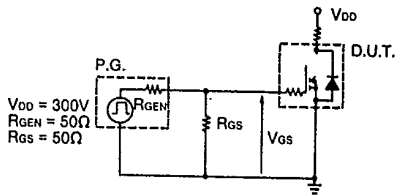
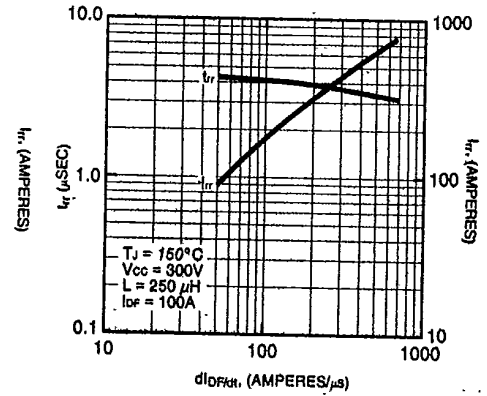


Fig. 1 Switching Time Test Circuit 1


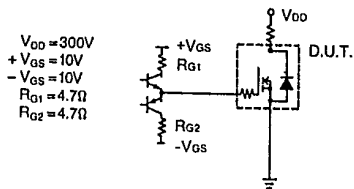


Fig. 2 Switching Time Test Circuit 2



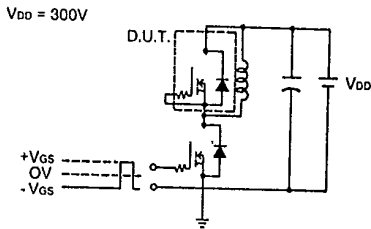

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.