

# AN8072N


## Multi Output Power Supply Regulator

### ■ Overview

The AN8072N is a multi-output IC designed for power supply regulator incorporating 5-ch positive output power supply which is 2-ch 8V output, 2-ch 10V output and 1-ch 10V output. It is most suitable for equipments which need multi supply voltage supply.

### ■ Features


- Operating supply voltage range :  $V_{CC (opr.)} = 10.5V \sim 16V$  (Battery Voltage)
- Low power consumption :  $I_{CC} = 1.6mA$  typ.
- Overvoltage, output short protection built-in
- 5-ch constant voltage output ON/OFF by battery input, ACC input and control input

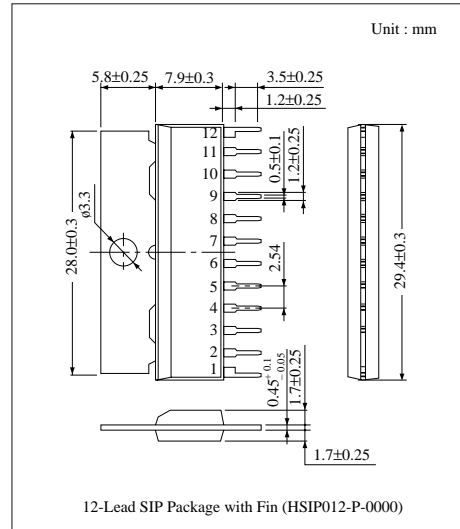

### ■ Main Characteristics

	Output Voltage	Max. Load Current	Input Stability (max.)	Load Stability (max.)	Protection Circuit		Output ON/OFF Function
					Output Short	Overvoltage	
Output 1	8V	200mA	200mV	200mV	Built-in	Built-in	Built-in
Output 2	8V	100mA	150mV	150mV	Built-in	Built-in	Built-in
Output 3	10V	12mA	200mV	200mV	—	—	—
Output 4	5V	60mA	100mV	100mV	Built-in	Built-in	—
Output 5	5V	60mA	100mV	50mV	Built-in	Built-in	—

### ■ Block Diagram

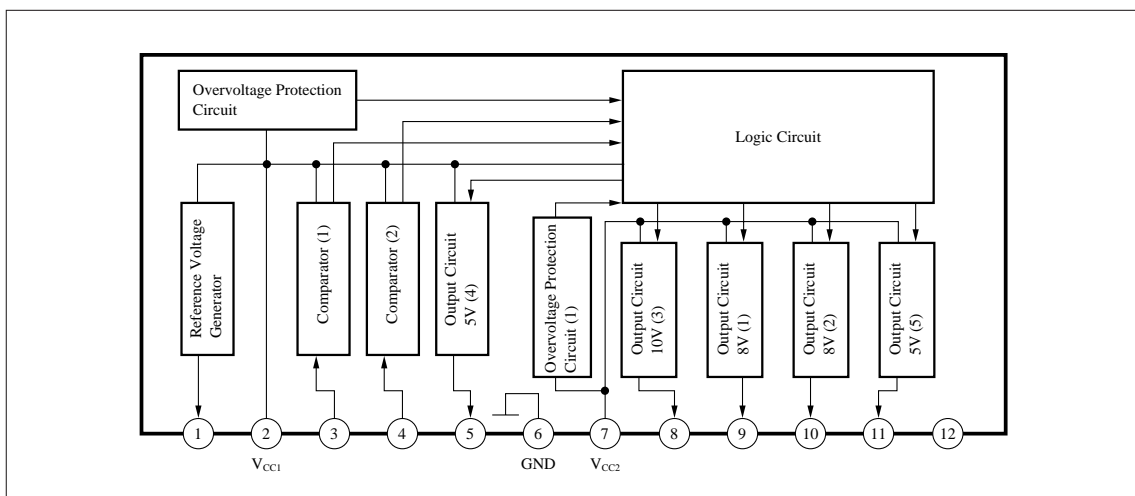

### ■ Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	V <sub>CC</sub>	20	V
Supply Current	I <sub>CC</sub>	340 *	mA
Power Dissipation (Ta = 75°C)	P <sub>D</sub>	1200	mW
Operating Ambient Temperature	T <sub>opr</sub>	- 30 ~ + 75	°C
Storage Temperature	T <sub>stg</sub>	- 55 ~ +150	°C

\* Incorporates a load current 330mA.

### ■ Recommended Operating Range (Ta = 25°C)


Parameter	Symbol	Range
Operating Supply Voltage Range	V <sub>CC1</sub>	10.5V ~ 16V

### ■ Electrical Characteristics (Ta = 25°C)

( Each output is obtained by setting control pin for H/L according to timing chart in P.701. )

Parameter	Symbol	Condition	min.	typ.	max.	Unit
<b>Output 1</b>						
Output Voltage (FM)	V <sub>9-6</sub>	V <sub>2</sub> = 13.2V, I <sub>9</sub> = 120mA	7.6	8	8.32	V
Input Stability	ΔV <sub>9-6</sub>	V <sub>2</sub> = 10.5V~16V, I <sub>9</sub> = 120mA	—	100	200	mV
Load Stability	ΔV <sub>9-6</sub>	V <sub>2</sub> = 13.2V, I <sub>9</sub> = 10mA ~ 200mA	—	80	200	mV
Min. I/O Voltage Difference	V <sub>2-9</sub>	I <sub>9</sub> = 200mA	—	2.1	—	V
<b>Output 2</b>						
Output Voltage (AM)	V <sub>10-6</sub>	V <sub>2</sub> = 13.2V, I <sub>10</sub> = 50mA	7.6	8	8.32	V
Input Stability	ΔV <sub>10-6</sub>	V <sub>2</sub> = 10.5V~16V, I <sub>10</sub> = 50mA	—	60	150	mV
Load Stability	ΔV <sub>10-6</sub>	V <sub>2</sub> = 13.2V, I <sub>10</sub> = 5mA~100mA	—	65	150	mV
Min. I/O Voltage Difference	V <sub>2-10</sub>	I <sub>10</sub> = 100mA	—	1.9	—	V
<b>Output 3</b>						
Output Voltage (V <sub>VAR</sub> )	V <sub>8-6</sub>	V <sub>2</sub> = 13.2V, I <sub>8</sub> = 10mA	9.5	9.9	10.3	V
Input Stability	ΔV <sub>8-6</sub>	V <sub>2</sub> = 10.5V~16V, I <sub>8</sub> = 10mA	—	60	200	mV
Load Stability	ΔV <sub>8-6</sub>	V <sub>2</sub> = 13.2V, I <sub>8</sub> = 1mA~12mA	—	75	200	mV
Min. I/O Voltage Difference	V <sub>7-8</sub>	I <sub>8</sub> = 10mA	—	0.1	—	V
<b>Output 4</b>						
Output Voltage (V <sub>DD</sub> )	V <sub>5-6</sub>	V <sub>2</sub> = 13.2V, I <sub>5</sub> = 30mA	4.7	5	5.2	V
Input Stability	ΔV <sub>5-6</sub>	V <sub>2</sub> = 10.5V~16V, I <sub>5</sub> = 30mA	—	25	100	mV
Load Stability	ΔV <sub>5-6</sub>	V <sub>2</sub> = 13.2V, I <sub>5</sub> = 1mA ~ 60mA	—	40	100	mV
Min. I/O Voltage Difference	V <sub>2-5</sub>	I <sub>5</sub> = 60mA	—	1.8	—	V
<b>Output 5</b>						
Output Voltage (CE)	V <sub>11-6</sub>	V <sub>2</sub> = 13.2V, I <sub>11</sub> = 30mA	4.7	5	5.2	V
Input Stability	ΔV <sub>11-6</sub>	V <sub>2</sub> = 10.5V~16V, I <sub>11</sub> = 30mA	—	40	100	mV
Load Stability	ΔV <sub>11-6</sub>	V <sub>2</sub> = 13.2V, I <sub>11</sub> = 1mA ~ 60mA	—	5	50	mV


■ Application Circuit

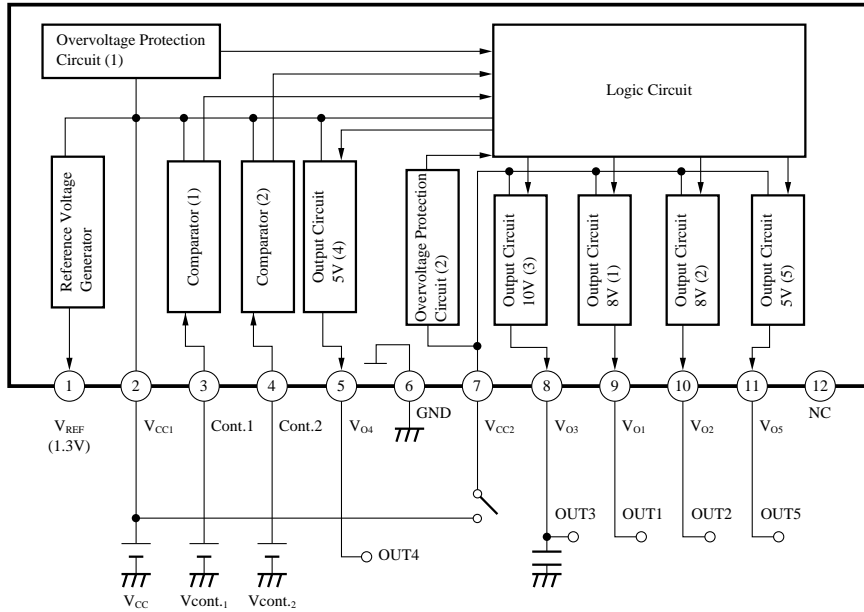

■ Pin Descriptions

Pin No.	Pin Name	Typ. Waveform	Pin Description	Equivalent Circuit
1	Reference Voltage Output Pin	DC 1.3V	IC internal reference voltage for making 5 output. For monitor	_____
2	Supply Pin (1)	DC 13.2V	V <sub>CC</sub> (1)	_____
3	Control Input Pin		For FM AM output switching	
4	Control Input Pin		For FM AM output switching	
5	V <sub>DD</sub> Output Pin	DC 5V	5V output	
6	GND	DC 0V	GND	_____
7	Supply Pin (2)	DC 13.2V	V <sub>CC</sub> (2)	_____
8	V <sub>VAR</sub> Output Pin	DC 10V	10V output	
9	FM Output Pin	DC 8V	8V output	
10	AM Output Pin	DC 8V	8V output	
11	CE Output Pin	DC 5V	5V output	
12	NC	—	NC	_____

- Supplementary Explanation
- I/O Timing Chart

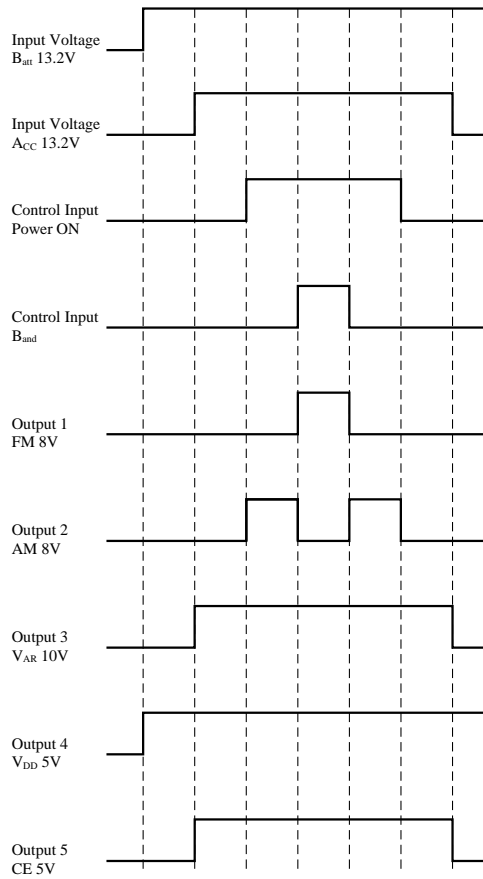



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.