



# BAS40 / -04 / -05 / -06

## Surface Mount Schottky Barrier Diode



Voltage Range  
40 Volts  
350m Watts Power Dissipation


### SOT-23

### Features


- ✧ Low turn-on voltage
- ✧ Fast switching
- ✧ PN junction guard Ring for transient and ESD protection

### Mechanical Data


- ✧ Case: SOT-23, Molded plastic
- ✧ Terminals: Solderable per MIL-STD-202, Method 208
- ✧ Marking & Polarity: See diagram below
- ✧ Weight: 0.008 grams (approx.)

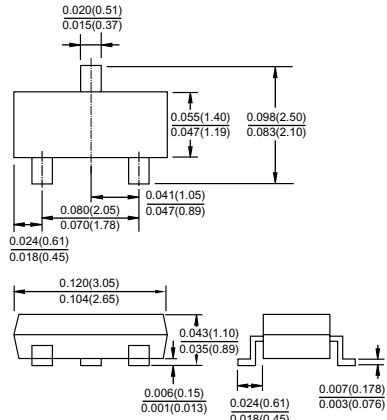


Dimensions in inches and (millimeters)




BAS40 Marking: 43



BAS40-04 Marking: 44



BAS40-05 Marking: 45



BAS40-06 Marking: 46

### Maximum Ratings $T_A=25^{\circ}\text{C}$ unless otherwise specified

Type Number	Symbol	BAS40	Units
Peak Repetitive Reverse Voltage	VRRM		
Working Peak Reverse Voltage	VRWM	40	V
DC Blocking Voltage	VR		
Forward Continuous Current (Note 1)	IFM	200	mA
Non-Repetitive Peak Forward Surge Current @ $t \leq 1.0\text{s}$	IFSM	600	mA
Power Dissipation (Note 1)	Pd	350	mW
Thermal Resistance Junction to Ambient Air (Note 1)	$R_{\theta JA}$	357	$^{\circ}\text{C/W}$
Operating Junction Temperature Range	$T_J$	-55 to + 125	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to + 150	$^{\circ}\text{C}$

### Electrical Characteristics

Type Number	Symbol	Min	Typ	Max	Units
Reverse Breakdown Voltage $I_R=10\mu\text{A}$	V(BR)	40	-	-	V
Reverse Leakage Current $t_p<300\mu\text{s}$ , $V_R=30\text{V}$	IR	--	20	200	nA
Forward Voltage Drop $t_p300\mu\text{s}$ , $I_F=1.0\text{mA}$ $t_p<300\mu\text{s}$ , $I_F=40\text{mA}$	VF	--	-	380 1000	mV
Junction Capacitance $V_R=0$ , $f=1.0\text{MHz}$	Cj	-	4.0	5.0	pF
Reverse Recovery Time (Note 2)	trr	-	--	5.0	nS

Notes: 1. Valid Provided that Terminals are Kept at Ambient Temperature.

2. Reverse Recovery Test Conditions:  $I_F=I_R=10\text{mA}$ ,  $I_R=1.0\text{mA}$ ,  $R_L=100\Omega$ .



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.