

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

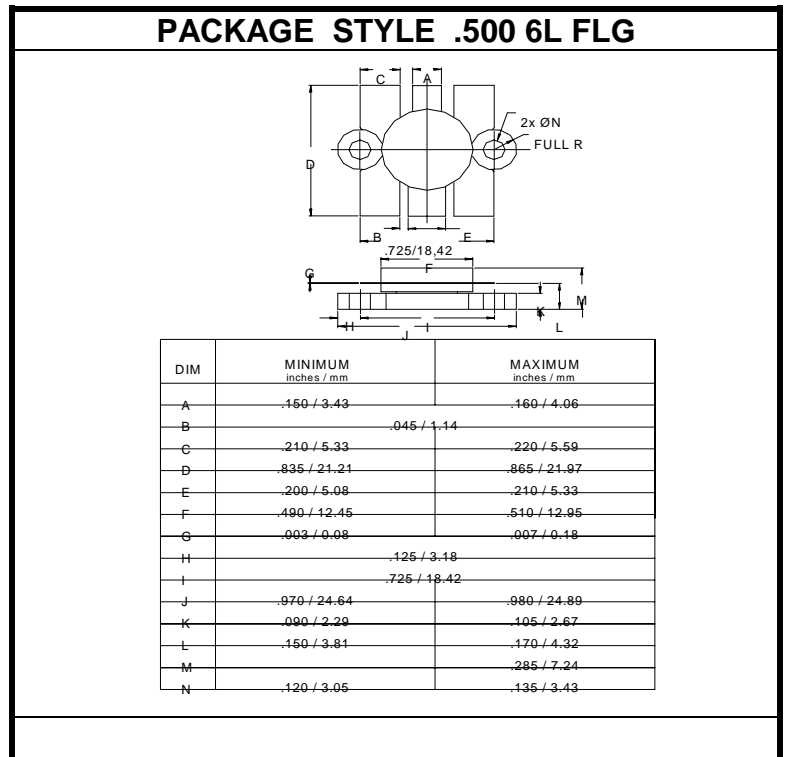
The **ASI BLU20/12** is Designed for Class C, FM Land Mobile Applications up to 470 MHz.

FEATURES:

- Internal Input Matching Network
- $P_G = 6.5$ dB at 20 W/470 MHz
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	4.0 A
V_{CBO}	36 V
V_{CEO}	16 V
V_{EBO}	4.0 V
P_{DISS}	38 W @ $T_C = 25$ °C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	4.6 °C/W


CHARACTERISTICS $T_C = 25$ °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CEO}	$I_C = 50$ mA	16			V
BV_{CES}	$I_C = 25$ mA	36			V
BV_{EBO}	$I_E = 5.0$ mA	4.0			V
I_{CES}	$V_{CE} = 20$ V			12	mA
h_{FE}	$V_{CE} = 10$ V $I_C = 2.7$ A	15		60	---
C_{OB}	$V_{CB} = 12.5$ V $f = 1.0$ MHz		53		pF
P_G	$V_{CC} = 12.5$ V $P_{OUT} = 20$ W $f = 470$ MHz	6.5			dB
η_C		55			%



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.