


LOW LEVEL AUDIO-AMPLIFIER AND SWITCHING.

FEATURES

- Super Mini Packaged Transistor for Hybrid Circuits.
- For Complementary with PNP Type BCW69/70/89.

MAXIMUM RATING (Ta=25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	BCW71/72	V_{CBO}	50	V
	BCV71/72		60	
Collector-Emitter Voltage	BCW71/72	V_{CEO}	45	V
	BCV71/72		60	
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current		I_C	100	mA
Emitter Current		I_E	-100	mA
Collector Power Dissipation		P_C	200	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-65 ~ 150	°C

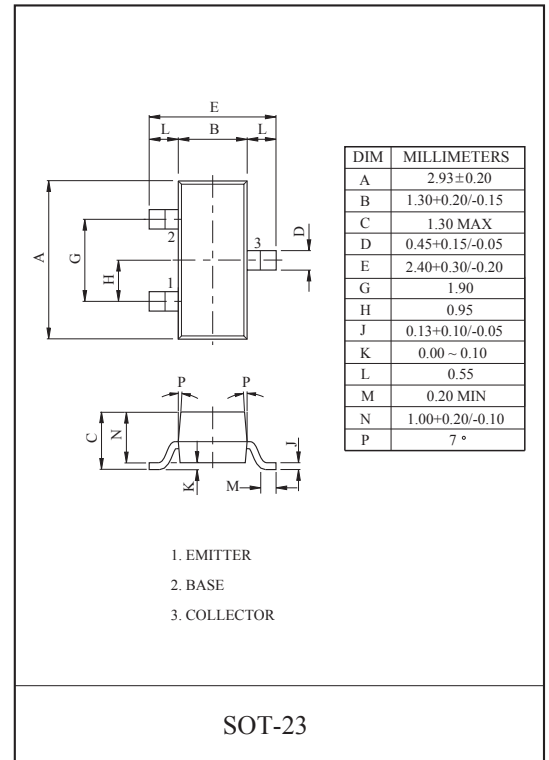

MARK SPEC

TYPE	MARK
BCW71	K 1
BCW72	K 2
BCV71	K 7
BCV72	K 8

Marking

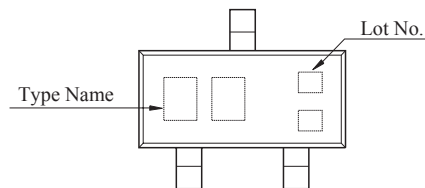

BCV71/72, BCW71/72

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector-Emitter Breakdown Voltage	BCW71/72	$V_{(BR)CEO}$	$I_C=2mA, I_B=0$	45	-	-	V
	BCV71/72			60	-	-	
Collector-Base Breakdown Voltage	BCW71/72	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	50	-	-	V
	BCV71/72			60	-	-	
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	5.0	-	-	V
Collector Cut-off Current		I_{CBO}	$V_{CB}=20V, I_E=0$	-	-	100	nA
			$T_a=100^\circ C, V_{CB}=20V, I_E=0$	-	-	10	μA
DC Current Gain	BCV71/BCW71	h_{FE}	$V_{CE}=5V, I_C=10\mu A$	-	100	-	
	BCV72/BCW72			-	160	-	
	BCV71/BCW71		$V_{CE}=5V, I_C=2mA$	110	-	220	
	BCV72/BCW72			200	-	450	
Base-Emitter Voltage		$V_{BE(ON)}$	$V_{CE}=5V, I_C=2mA$	550	-	700	mV
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=10mA, I_B=0.5mA$	-	750	-	mV
			$I_C=50mA, I_B=2.5mA$	-	870	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$	-	-	250	mV
			$I_C=50mA, I_B=2.5mA$	-	230	-	
Transition Frequency		f_T	$I_C=10mA, V_{CE}=5V, f=100MHz$	-	300	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	-	4.0	pF
Noise Figure		NF	$I_C=0.2mA, V_{CE}=5V, \Delta f=200Hz$ $R_g=2k\Omega, f=1kHz$	-	-	10	dB



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.