


NPN Silicon AF Transistors

BCX 58
BCX 59

- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BCX 78, BCX 79 (PNP)

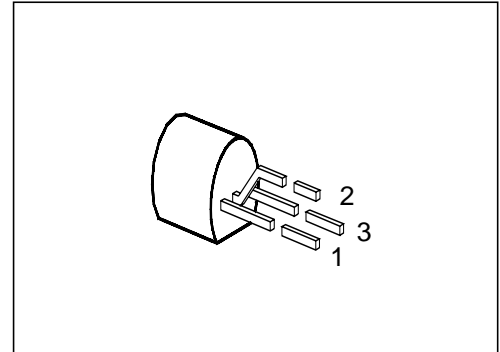

Type	Marking	Ordering Code	Pin Configuration			Package ¹⁾
			1	2	3	
BCX 58 VIII BCX 58 IX BCX 58 X BCX 59 VIII BCX 59 IX BCX 59 X	–	Q62702-C619 Q62702-C620 Q62702-C621 Q62702-C623 Q62702-C624 Q62702-C625	C	B	E	TO-92

Maximum Ratings

Parameter	Symbol	Values		Unit
		BCX 58	BCX 59	
Collector-emitter voltage	V_{CE0}	32	45	V
Collector-base voltage	V_{CB0}	32	45	
Emitter-base voltage	V_{EB0}	7		
Collector current	I_C	100		mA
Peak collector current	I_{CM}	200		
Peak base current	I_{BM}	200		
Total power dissipation, $T_C = 70\text{ °C}$	P_{tot}	500		mW
Junction temperature	T_j	150		°C
Storage temperature range	T_{stg}	– 65 ... + 150		

Thermal Resistance

Junction - ambient	$R_{th\ JA}$	≤ 250	K/W
Junction - case ²⁾	$R_{th\ JC}$	≤ 160	

¹⁾ For detailed information see chapter Package Outlines.

²⁾ Mounted on Al heat sink 15 mm × 25 mm × 0.5 mm.

Electrical Characteristics

at $T_A = 25\text{ °C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC characteristics

Collector-emitter breakdown voltage $I_C = 2\text{ mA}$	$V_{(BR)CE0}$	32 45	— —	— —	V
Collector-base breakdown voltage $I_C = 10\text{ }\mu\text{A}$	$V_{(BR)CB0}$	32 45	— —	— —	
Emitter-base breakdown voltage $I_E = 1\text{ }\mu\text{A}$	$V_{(BR)EB0}$	7	—	—	
Collector cutoff current $V_{CB} = 32\text{ V}$ $V_{CB} = 45\text{ V}$ $V_{CB} = 32\text{ V}, T_A = 150\text{ °C}$ $V_{CB} = 45\text{ V}, T_A = 150\text{ °C}$	I_{CB0}	— — — —	— — — —	20 20 10 10	nA nA μA μA
Collector cutoff current $V_{CE} = 32\text{ V}, V_{BE} = 0.2\text{ V}, T_A = 100\text{ °C}$ $V_{CE} = 45\text{ V}, V_{BE} = 0.2\text{ V}, T_A = 100\text{ °C}$	I_{CEX}	— —	— —	20 20	μA
Emitter cutoff current $V_{EB} = 4\text{ V}$	I_{EB0}	—	—	20	nA
DC current gain $I_C = 10\text{ }\mu\text{A}, V_{CE} = 5\text{ V}$ BCX 58 VII, BCX 59 VII BCX 58 VIII, BCX 59 VIII BCX 58 IX, BCX 59 IX BCX 58 X, BCX 59 X $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}$ BCX 58 VII, BCX 59 VII BCX 58 VIII, BCX 59 VIII BCX 58 IX, BCX 59 IX BCX 58 X, BCX 59 X $I_C = 100\text{ mA}, V_{CE} = 1\text{ V}^1)$ BCX 58 VII, BCX 59 VII BCX 58 VIII, BCX 59 VIII BCX 58 IX, BCX 59 IX BCX 58 X, BCX 59 X	h_{FE}	20 20 40 100 120 180 250 380 40 45 60 60	78 145 220 300 170 250 350 500 — — — —	— — — — 220 310 460 630 — — — —	—

1) Pulse test: $t \leq 300\text{ }\mu\text{s}, D \leq 2\%$.

Electrical Characteristics

at $T_A = 25\text{ °C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC characteristics

Collector-emitter saturation voltage ¹⁾ $I_C = 100\text{ mA}$, $I_B = 2.5\text{ mA}$	V_{CEsat}	–	–	0.5	V
Base-emitter saturation voltage ¹⁾ $I_C = 100\text{ mA}$, $I_B = 2.5\text{ mA}$	V_{BEsat}	–	–	1.0	
Base-emitter voltage $I_C = 10\text{ }\mu\text{A}$, $V_{CE} = 5\text{ V}$ $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$ $I_C = 100\text{ mA}$, $V_{CE} = 1\text{ V}$ ¹⁾	$V_{BE(on)}$	– 0.55 –	0.52 0.65 0.83	– 0.75 –	

¹⁾ Pulse test: $t \leq 300\text{ }\mu\text{s}$, $D \leq 2\%$.

Electrical Characteristics


at $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	


AC characteristics

Transition frequency $I_C = 20\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 100\text{ MHz}$	f_T	–	200	–	MHz
Output capacitance $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{obo}	–	3	–	pF
Input capacitance $V_{CB} = 0.5\text{ V}$, $f = 1\text{ MHz}$	C_{ibo}	–	8	–	
Short-circuit input impedance $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	h_{11e}				k Ω
BCX 58 VII, BCX 59 VII	–	2.7	–		
BCX 58 VIII, BCX 59 VIII	–	3.6	–		
BCX 58 IX, BCX 59 IX	–	4.5	–		
BCX 58 X, BCX 59 X	–	7.5	–		
Open-circuit reverse voltage transfer ratio $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	h_{12e}				10^{-4}
BCX 58 VII, BCX 59 VII	–	1.5	–		
BCX 58 VIII, BCX 59 VIII	–	2.0	–		
BCX 58 IX, BCX 59 IX	–	2.0	–		
BCX 58 X, BCX 59 X	–	3.0	–		
Short-circuit forward current transfer ratio $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	h_{21e}				–
BCX 58 VII, BCX 59 VII	–	200	–		
BCX 58 VIII, BCX 59 VIII	–	260	–		
BCX 58 IX, BCX 59 IX	–	330	–		
BCX 58 X, BCX 59 X	–	520	–		
Open-circuit output admittance $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	h_{22e}				μS
BCX 58 VII, BCX 59 VII	–	18	–		
BCX 58 VIII, BCX 59 VIII	–	24	–		
BCX 58 IX, BCX 59 IX	–	30	–		
BCX 58 X, BCX 59 X	–	50	–		
Noise figure $I_C = 0.2\text{ mA}$, $V_{CE} = 5\text{ V}$, $R_S = 2\text{ k}\Omega$ $f = 1\text{ kHz}$, $\Delta f = 200\text{ Hz}$	F	–	2	–	dB


Total power dissipation $P_{tot} = f(T_A; T_C)$

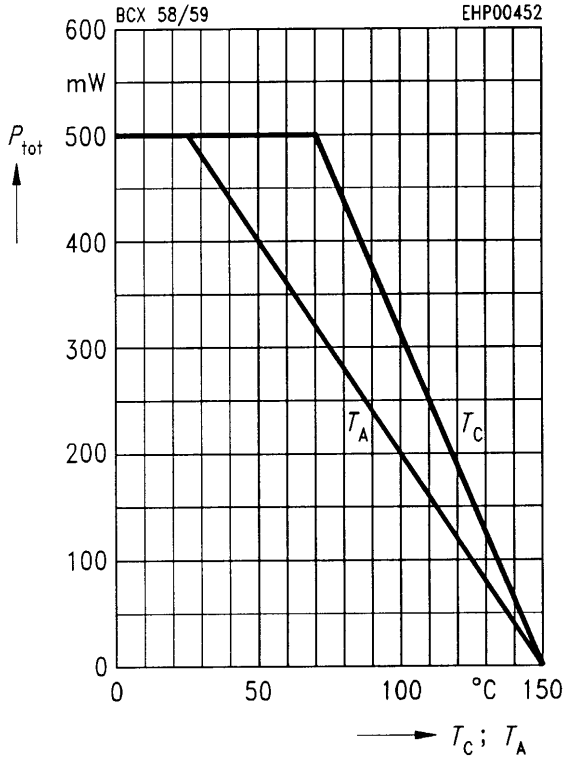


Collector current $I_C = f(V_{BE})$
 $V_{CE} = 5\text{ V}$ (common emitter configuration)

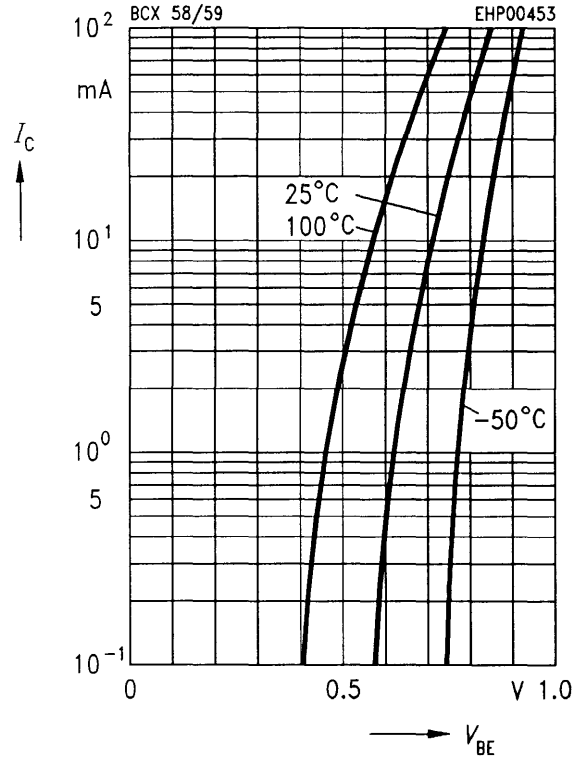


Permissible pulse load $R_{thJA} = f(t_p)$

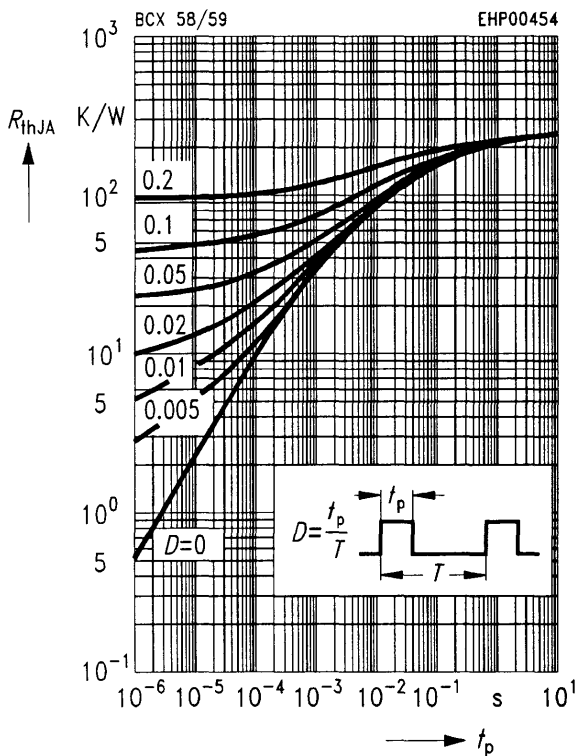


DC current gain $h_{FE} = f(I_C)$
 $V_{CE} = 5\text{ V}$ (common emitter configuration)

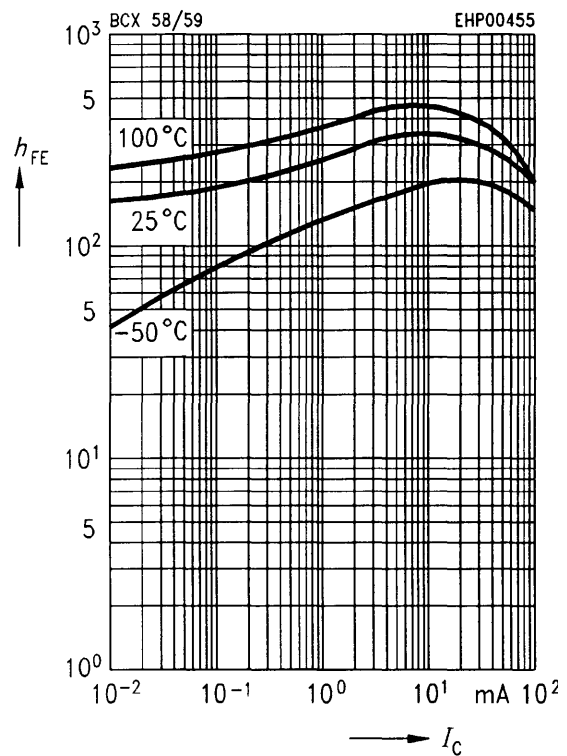

Collector cutoff current $I_{CB0} = f(T_A)$
 $V_{CB} = 45\text{ V}$

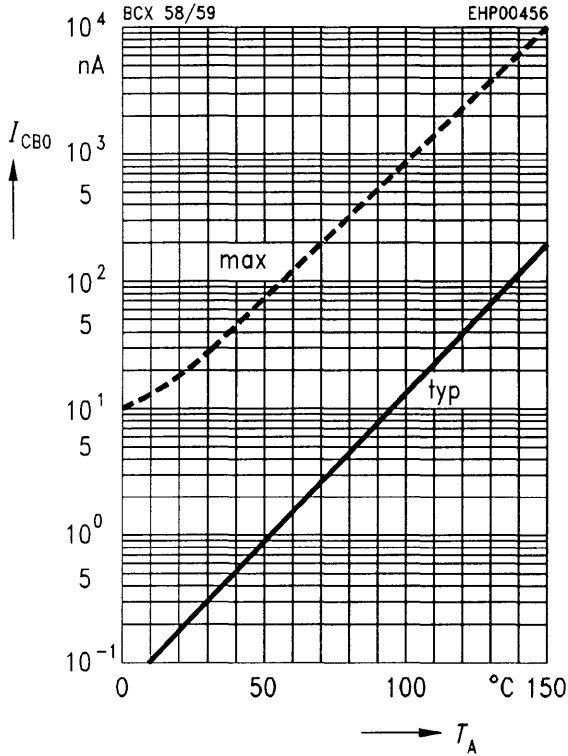


Transition frequency $f_T = f(I_C)$
 $V_{CE} = 5\text{ V}, f = 100\text{ MHz}$

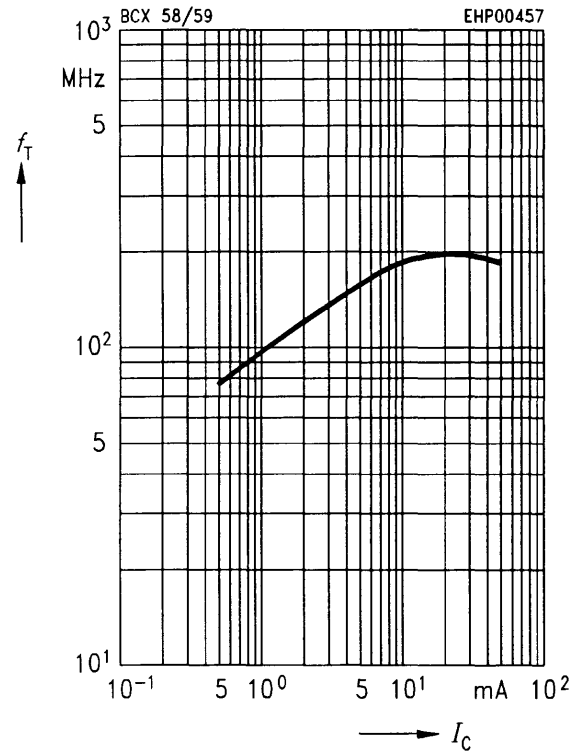


Base-emitter saturation voltage

$I_C = f(V_{BEsat})$
 $h_{FE} = 20$

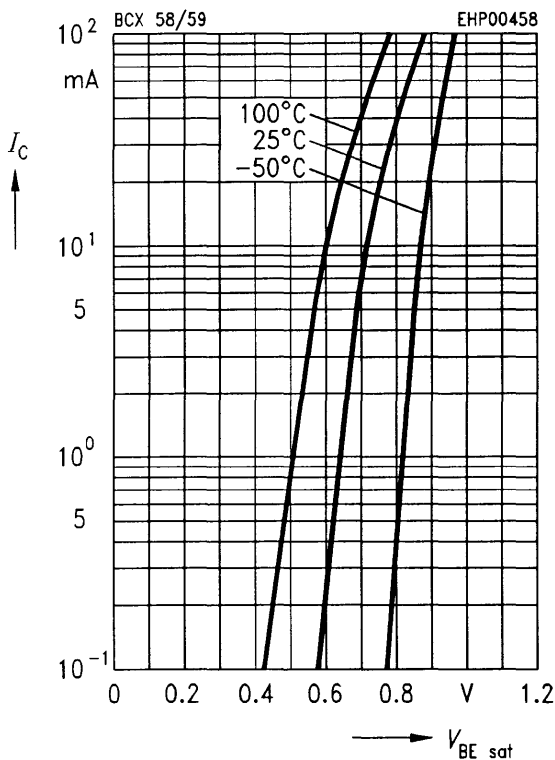

Collector-emitter saturation voltage

$I_C = f(V_{CEsat})$
 $h_{FE} = 20$

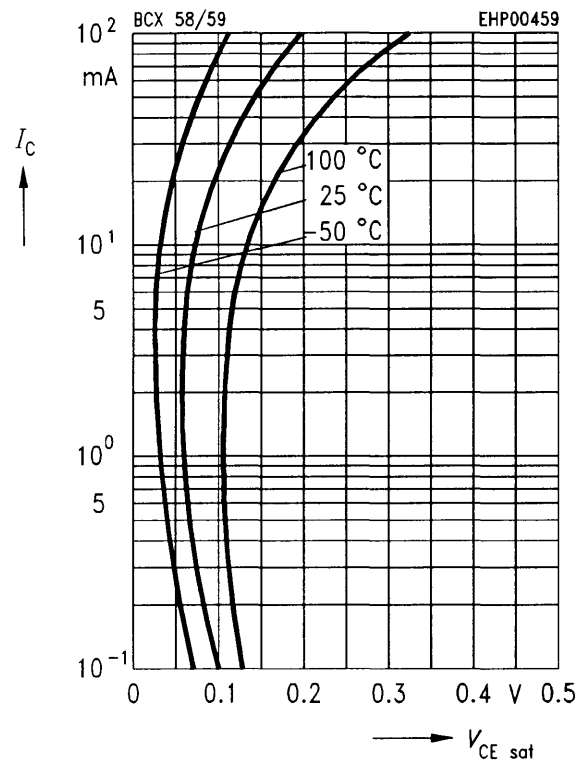



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.