


## Thunderbolt IGBT™

The Thunderbolt IGBT™ is a new generation of high voltage power IGBTs. Using Non-Punch Through Technology the Thunderbolt IGBT™ offers superior ruggedness and ultrafast switching speed.

- Low Forward Voltage Drop
- Low Tail Current
- Avalanche Rated
- High Freq. Switching to 150KHz
- Ultra Low Leakage Current
- RBSOA and SCSOA Rated

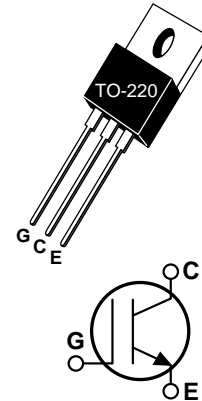


### MAXIMUM RATINGS

All Ratings:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

Symbol	Parameter	APT12GT60KR	UNIT
$V_{CES}$	Collector-Emitter Voltage	600	Volts
$V_{CGR}$	Collector-Gate Voltage ( $R_{GE} = 20K\Omega$ )	600	
$V_{EC}$	Emitter-Collector Voltage	15	
$V_{GE}$	Gate-Emitter Voltage	$\pm 20$	
$I_{C1}$	Continuous Collector Current @ $T_C = 25^\circ\text{C}$	25	Amps
$I_{C2}$	Continuous Collector Current @ $T_C = 115^\circ\text{C}$	12	
$I_{CM1}$	Pulsed Collector Current <sup>①</sup> @ $T_C = 25^\circ\text{C}$	50	
$I_{CM2}$	Pulsed Collector Current <sup>①</sup> @ $T_C = 115^\circ\text{C}$	24	
$E_{AS}$	Single Pulse Avalanche Energy <sup>②</sup>	18	mJ
$P_D$	Total Power Dissipation	125	Watts
$T_J, T_{STG}$	Operating and Storage Junction Temperature Range	-55 to 150	$^\circ\text{C}$
$T_L$	Max. Lead Temp. for Soldering: 0.063" from Case for 10 Sec.	300	

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$BV_{CES}$	Collector-Emitter Breakdown Voltage ( $V_{GE} = 0V, I_C = 0.4mA, T_j = -55^\circ\text{C}$ )	600			Volts
$RBV_{CES}$	Collector-Emitter Reverse Breakdown Voltage ( $V_{GE} = 0V, I_C = 50mA$ )	-15			
$V_{GE(TH)}$	Gate Threshold Voltage ( $V_{CE} = V_{GE}, I_C = 350\mu A, T_j = 25^\circ\text{C}$ )	3	4	5	
$V_{CE(ON)}$	Collector-Emitter On Voltage ( $V_{GE} = 15V, I_C = I_{C2}, T_j = 25^\circ\text{C}$ )	1.6	2.0	2.5	
	Collector-Emitter On Voltage ( $V_{GE} = 15V, I_C = I_{C2}, T_j = 150^\circ\text{C}$ )			2.8	
$I_{CES}$	Collector Cut-off Current ( $V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 25^\circ\text{C}$ )			40	$\mu A$
	Collector Cut-off Current ( $V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 150^\circ\text{C}$ )			1000	
$I_{GES}$	Gate-Emitter Leakage Current ( $V_{GE} = \pm 20V, V_{CE} = 0V$ )			$\pm 100$	nA

 **CAUTION:** These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

APT Website - <http://www.advancedpower.com>

**USA**  
405 S.W. Columbia Street  
**EUROPE**

Avenue J.F. Kennedy Bât B4 Parc Cadéra Nord

Bend, Oregon 97702-1035

Phone: (541) 382-8028

FAX: (541) 388-0364

F-33700 Merignac - France

Phone: (33) 5 57 92 15 15

FAX: (33) 5 56 47 97 61

## DYNAMIC CHARACTERISTICS

APT12GT60KR

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
$C_{ies}$	Input Capacitance	<b>Capacitance</b> $V_{GE} = 0V$ $V_{CE} = 25V$ $f = 1\text{ MHz}$		580		pF
$C_{oes}$	Output Capacitance			75		
$C_{res}$	Reverse Transfer Capacitance			50		
$Q_g$	Total Gate Charge <sup>③</sup>	<b>Gate Charge</b> $V_{GE} = 15V$ $V_{CC} = 0.50V_{CES}$ $I_C = I_{C2}$		65		nC
$Q_{ge}$	Gate-Emitter Charge			34		
$Q_{gc}$	Gate-Collector ("Miller") Charge			5		
$t_{d(on)}$	Turn-on Delay Time	<b>Resistive Switching (25°C)</b> $V_{GE} = 15V$ $V_{CC} = 0.66V_{CES}$ $I_C = I_{C2}$ $R_G = 10\Omega$		8		ns
$t_r$	Rise Time			22		
$t_{d(off)}$	Turn-off Delay Time			80		
$t_f$	Fall Time			110		
$t_{d(on)}$	Turn-on Delay Time	<b>Inductive Switching (150°C)</b> $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +150^\circ C$		12		ns
$t_r$	Rise Time			6		
$t_{d(off)}$	Turn-off Delay Time			150		
$t_f$	Fall Time			120		
$E_{on}$	Turn-on Switching Energy	$R_G = 10\Omega$ $T_J = +150^\circ C$		0.10		mJ
$E_{off}$	Turn-off Switching Energy			0.40		
$E_{ts}$	Total Switching Losses			0.50		
$t_{d(on)}$	Turn-on Delay Time	<b>Inductive Switching (25°C)</b> $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +25^\circ C$		12		ns
$t_r$	Rise Time			6		
$t_{d(off)}$	Turn-off Delay Time			120		
$t_f$	Fall Time			45		
$E_{ts}$	Total Switching Losses			0.22		
$g_{fe}$	Forward Transconductance	$V_{CE} = 20V, I_C = I_{C2}$	2	6.7		S

## THERMAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			1.0	°C/W
$R_{\theta JA}$	Junction to Ambient			80	
Torque	Mounting Torque using a 6-32 or 3mm Binding Head Machine Screw		10		lb•in

① Repetitive Rating: Pulse width limited by maximum junction temperature.

②  $I_C = I_{C2}, V_{CC} = 50V, R_{GE} = 25\Omega, L = 250\mu H, T_J = 25^\circ C$

③ See MIL-STD-750 Method 3471

APT Reserves the right to change, without notice, the specifications and information contained herein.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.